



TRANSPORTATION COMMITTEE
TUESDAY, NOVEMBER 3, 2020
12:00 P.M.
REMOTE ATTENDANCE

To comply with Governor Inslee's Proclamation 20-28, the General Government & Public Safety Committee Meeting will be conducted remotely, not in-person. However, you may view the meeting by watching live through Zoom:

Link: <https://us02web.zoom.us/j/84850521319>

The public may also listen to the meeting via telephone by dialing toll-free:

(888) 788-0099 or **(877) 853-5247** - when prompted enter Webinar ID **848 5052 1319**
press # (*participant ID not required*)

STATE OF THE STREETS REPORT
BRIAN PETRIN, CIVIL ENGINEER
(PRESENTATION)



TRANSPORTATION COMMITTEE

November 3, 2020

SUBJECT: 2020 State of the Streets Report

RECOMMENDATION: Review the “2020 State of the Streets Report.”

STAFF CONTACT: Scott Spence, City Manager *SS*
Scott Egger, Director of Public Works *SE*
Roger Schoessel, City Engineer *RS*
Aubrey Collier, Design & Construction Manager *AC*
Brian Petrin, Civil Engineer *BP*

ORIGINATED BY: Public Works Department

ATTACHMENTS: 1. [“2020 State of the Streets Report”](#)

FISCAL NOTE: None.

PRIOR REVIEW: December 3, 2019, the Transportation Committee was briefed on the 2019 State of the Streets Report.
July 9, 2020, the City Council approved the Transportation Benefit District 2019 Annual Report.

BACKGROUND:

City staff evaluates the pavement conditions of the City’s streets annually. Each segment of roadway is visually checked for defects and a rating score from 0 to 100 is assigned based on the type, severity, and extent of the defects found present.

The current (2020) data indicates that 96.2% of Lacey’s roads are in very good or good condition, 3.1% are in fair condition, and 0.7% are in poor condition. The overall score for the road network is 82.7. The overall score in 2019 was 83.7.

ADVANTAGES:

1. The report provides a current and historical condition assessment of City roads.
2. The report allows the City to efficiently plan maintenance and rehabilitation for roadway projects.

DISADVANTAGES:

1. None.



STATE OF THE STREETS REPORT 2020

TABLE OF CONTENTS

PURPOSE / BACKGROUND	1
PAVEMENT MANAGEMENT SYSTEM	2
PHASE I (FIELD DATA COLLECTION)	2
PHASE II (DATA ANALYSIS & SCORING)	2
PHASE III (PROJECT & TREATMENT SELECTIONS)	2
PAVEMENT CONDITION INDEX (PCI) SCORES	3
REMAINING SERVICE LIFE (RSL)	4
FUNCTIONAL CLASSIFICATIONS	4
CURRENT PAVEMENT CONDITIONS	5
NETWORK TRENDS	6
PAVEMENT PRESERVATION STRATEGIES	8
ELEMENTS OF PAVEMENT PRESERVATION	10
BUDGET NEEDS CALCULATION	11
BUDGET SCENARIOS	12
SCENARIO 1: UNFUNDED (NO BUDGET)	13
SCENARIO 2: \$2.0 MILLION ANNUAL BUDGET	15
SCENARIO 3: MAINTAIN CURRENT PCI	17
SCENARIO 4: UNCONSTRAINED BUDGET	19
SCENARIO COMPARISON	21
ROAD REHABILITATION HISTORY	23
2020 ROADWAY IMPROVEMENTS	25
COLLEGE ST. & 22 ND AVE ROUNDABOUT	25
2020 OVERLAY (MERIDIAN RD, ORION DR, & MERIDIAN/ORION ROUNDABOUT)	27
I-5 – SR510 INTERCHANGE RECONSTRUCTION	29

2020 PAVEMENT RATING MAP	A-1
ESTIMATED REMAINING SERVICE LIFE MAP	A-2
FUNCTIONAL CLASSIFICATION MAP	A-3
ROAD MAINTENANCE HISTORY MAP	A-4
NEW ROAD HISTORY MAP	A-5
PAVEMENT CONDITION INDEX SCORES	31
ENTIRE NETWORK (ALPHABETICAL LISTING)	32
ARTERIALS AND COLLECTORS (BY PCI SCORE)	61
RESIDENTIAL STREETS (BY PCI SCORE)	68
ROADWAY DEFECT DEFINITIONS	90
RUTTING & WEAR	90
ALLIGATOR CRACKING	91
LONGITUDINAL & TRANSVERSE CRACKING	92
WEATHERING	93
RAVELING	94
PATCHING	95
DEPRESSIONS & DISTORTIONS	96
GLOSSARY OF COMMON TERMS	97

On the cover: College St & 22nd Roundabout



PURPOSE / BACKGROUND

Every year the City of Lacey collects pavement condition data for its entire roadway network. Here's a summary of Lacey's streets:

- 31.7 centerline miles of arterial streets,
- 23.2 centerline miles of collector streets, and
- 113.4 centerline miles of residential (local) streets, for a total of
- 168.3 centerline miles of roadway within City limits.

All public roads are visually inspected for pavement surface defects. These defects are documented and tallied in the pavement management database. The purpose of this report is to put the raw data in a form that allows the City to determine the current status of these streets on a network level, as well as make intelligent pavement-related repair and funding decisions.

Having a pavement management program in place provides a valuable opportunity to evaluate pavement condition trends. By studying these trends we can estimate and propose future budgetary and maintenance requirements, prioritize projects to maximize cost-effectiveness, and evaluate past performance. This report includes several "what-if" scenarios generated by the pavement management software, which analyze how varying budget amounts will impact the City's roads over a period of time.

Phase I (Field Data Collection)

Every year all paved roads within City limits are visually inspected for various signs of defects and aging (see pages 90-96). These roads are divided into smaller, more manageable sections for the purpose of inspection. Sections are typically from intersection to intersection and approximately 1000-1500 feet long as easily identifiable intersections allow. Currently the roadway network is divided up into 1088 field inspection units. As each section is examined, all pavement defects, along with their measurements and severities, are documented.

Phase II (Data Analysis & Scoring)

Since 2005 Lacey has been using a software program called *StreetSaver*, which was developed by the Metropolitan Transportation Commission (MTC) in the San Francisco Bay area and is specifically targeted for use by local municipalities. As data is gathered for each section, any defects noted are entered into the *StreetSaver* program, which deducts points from the section based on the defect type, severity, and size. That value is then adjusted to account for the number of different defects present within that section. This adjusted score is the pavement condition index (PCI). PCI scores range from 0 to 100; a score of 100 would denote a perfect, new section of roadway, and values getting close to 0 would represent a completely failed section.

After calculating the PCI scores for all road sections, the software establishes the extent of repair required and estimates repair costs. *StreetSaver* also calculates projected PCI scores based on different budgeting scenarios. Each year's rating and maintenance information is stored in a database, giving us a more complete record of our network's condition, and keeping track of the extent and timing of road improvements.

Phase III (Project & Treatment Selections)

The output from the data analysis includes a prioritized rating of the roadway segments. The list allows the City to develop a strategy for project selection depending upon the budgeting resources available. Another factor is the optimal timing for a given road treatment, which will ideally provide the greatest improvement in benefit for the lowest cost ("most bang for the buck"), thus making the best use of limited funds. A properly maintained pavement management system will aid in the challenge of maintaining the desired level of service on "good" roads while repairing the "poor" ones.

Pavement Condition Index (PCI) Scores

The condition categories listed below are ranges in the PCI scale that compare similar sections of pavement and make generalized assumptions about their condition.

➤ **“VERY GOOD”** (PCI Scores of 85 to 100)

These streets may be relatively new. They have few, if any defects, and what defects they do have are likely cosmetic. Routine maintenance, such as crack sealing or a surface seal, may be enough to provide a smooth ride for many years to come.



➤ **“GOOD”** (PCI Scores of 60 to 84)

These are streets that are beginning to show their age, due to climate and traffic. Common defects include various forms of cracking and raveling. The defects are generally not serious in nature, but could indicate a need for additional maintenance or localized treatment, such as patching. Their base is still intact and can provide several more years of service.



➤ **“FAIR”** (PCI Scores 40 of to 59)

Defects, such as alligator cracking and depressions, have become more prevalent and more severe. Pavement edges may start to ravel away. These roads are functional, but require rehabilitation if they are to remain an asset in the future. Some structural deficiencies and surface roughness are evident.



➤ **“POOR”** (PCI Scores of 0 to 39)

In this category, the pavement is overshadowed by large areas of cracking and depressions. The surfaces are uneven and may be prone to rutting. Failures in both the pavement and subgrade are easy to identify. These sections are near the end of their services lives and usually require a complete road reconstruction.



Remaining Service Life (RSL)

Some of the essential functions of pavement management are to (1) keep track of pavement condition using ways to measure performance and (2) forecast future pavement performance in order to plan ahead for maintenance and rehabilitation. One of the main indicators for the above is assessing the remaining service life (RSL) of a pavement.

Pavement RSL is the estimated number of years that a pavement section adequately performs to a desired level of service, after which time the pavement is providing substandard service quality. This value is calculated using the distress data and the pavement's rate of deterioration.

RSL is a measure of the amount of pavement service life, not pavement life. Therefore, it's possible for a road section to have an RSL value of zero, which means that it has dropped below the threshold of the desired level of service.

Functional Classifications

Roadways are grouped into functional classes based on the kind of service they are expected to provide. Transportation planners use functional classification to design a safe and efficient flow of traffic throughout the street network. The most basic categories are arterials, collectors, and residential streets.

➤ **ARTERIAL STREETS**

This system of streets serves the major centers of urban activity and supports the highest traffic volumes. Its purpose is to move people and goods efficiently and quickly, with the highest level of access control.




➤ **COLLECTOR STREETS**

These streets collect traffic from residential (local) roads and connect them with arterials. Compared to arterial streets, collectors provide a level of service at a lower speed for shorter distances, maintaining a balance between mobility and access.



➤ **RESIDENTIAL STREETS**

The great majority of streets in the network are meant to provide the most access to residences and other properties but with a lower level of mobility. These generally interconnect with each other and to collector streets.




CURRENT PAVEMENT CONDITIONS

The City of Lacey currently maintains 168.3 centerline miles of asphalt pavement. The average PCI score for the entire street network is 82.7. The table below summarizes the lengths and PCI scores of the road network, as a whole and by functional class. The numbers in parenthesis represent the change from the previous year.

Network Summary Statistics


	Centerline Miles	Lane Miles	Management Sections	% of Entire Network	PCI (weighted by area)	RSL (weighted by area)
Arterial Streets	31.7 (+0.1)	108.8 (+0.2)	149 (+1)	18.9% (+0.0)	80.2 (-1.7)	21.5 (-0.2)
Collector Streets	23.2 (+0.0)	52.7 (+0.0)	111 (+0)	13.7% (+0.0)	81.8 (+0.0)	19.4 (-0.1)
Residential Streets	113.4 (+0.7)	226.9 (+1.5)	828 (+2)	67.4% (+0.0)	84.0 (-0.9)	29.6 (-0.4)
Entire Network	168.3 (+0.8)	388.4 (+1.7)	1088 (+3)	100.0%	82.7 (-1.0)	25.9 (-0.4)

Over 96.2% of all streets in Lacey were rated as being in “good” or “very good” condition. Condition categories are relatively unchanged since last year.

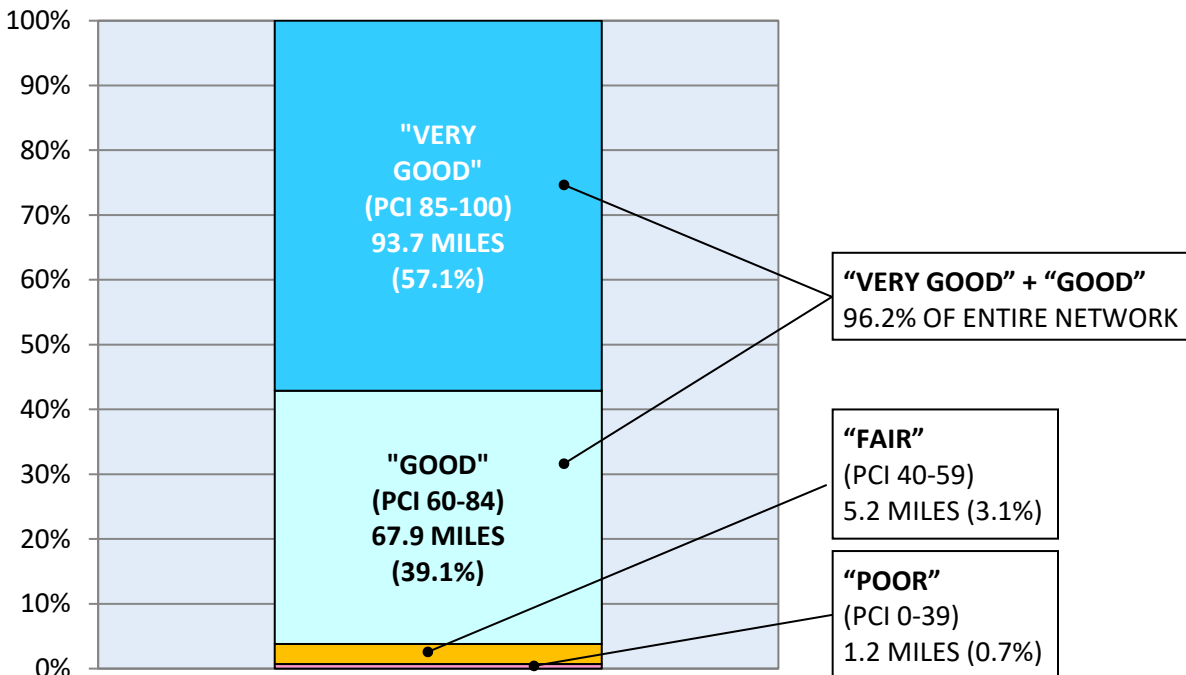


Centerline Miles of Roadway per Condition Category

NETWORK TRENDS

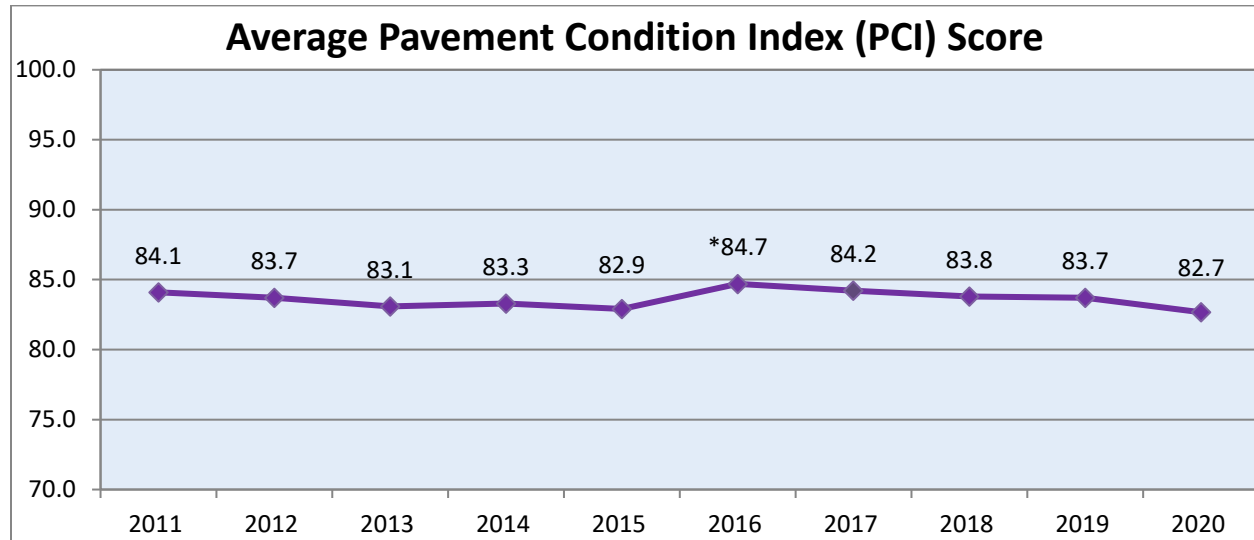


*Increase in PCI due to software update and revised definition of weathering and raveling.


The network Pavement Condition Index (PCI) score is determined from a weighted average based on section area. Recent neighborhood development (new streets), along with a history of road improvement projects, have helped to slow down the rate of pavement deterioration over the entire network.

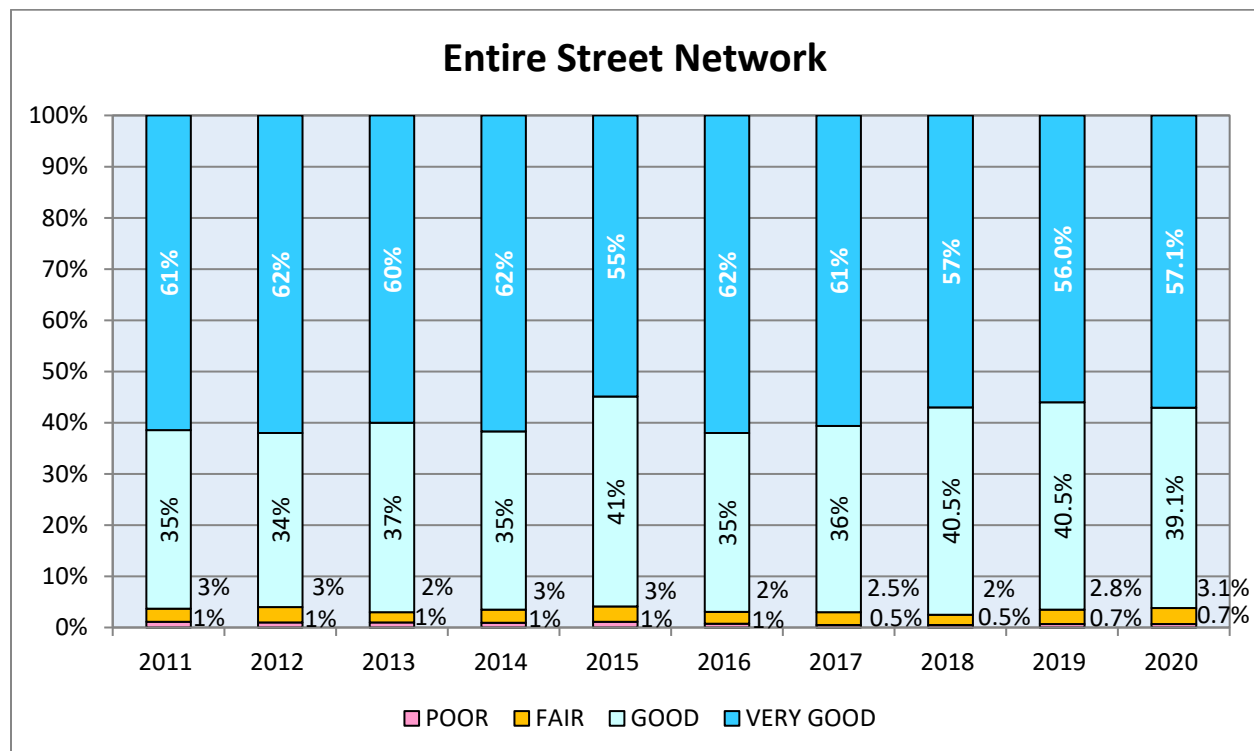

Arterial & Collector Streets

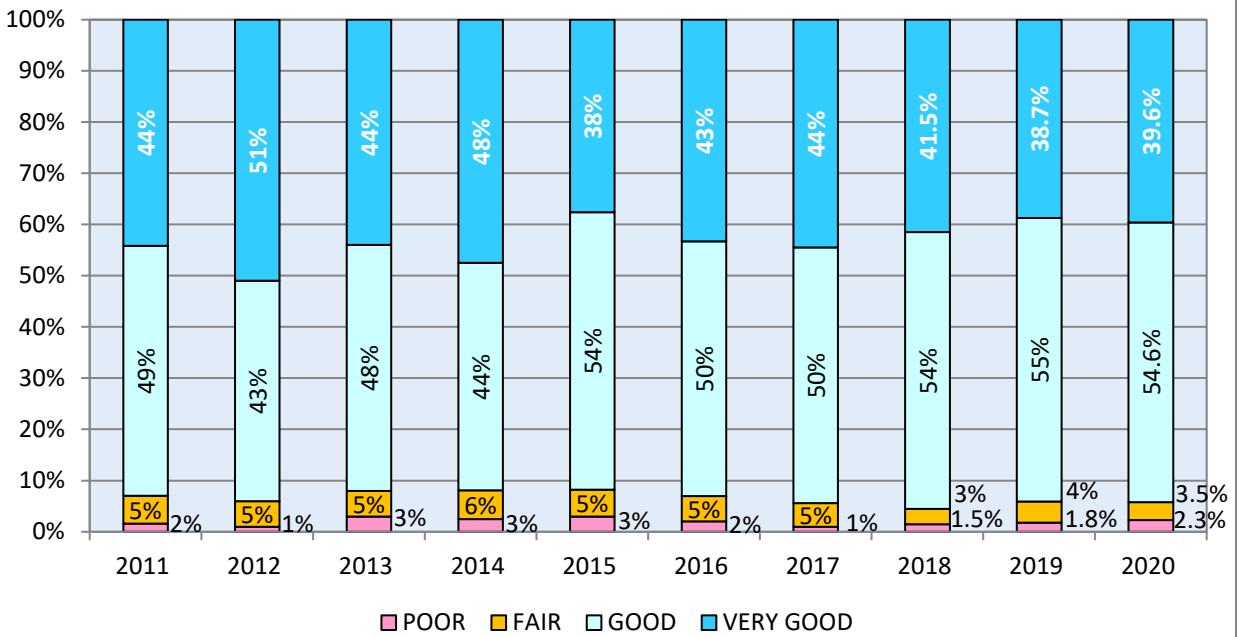

Residential Streets

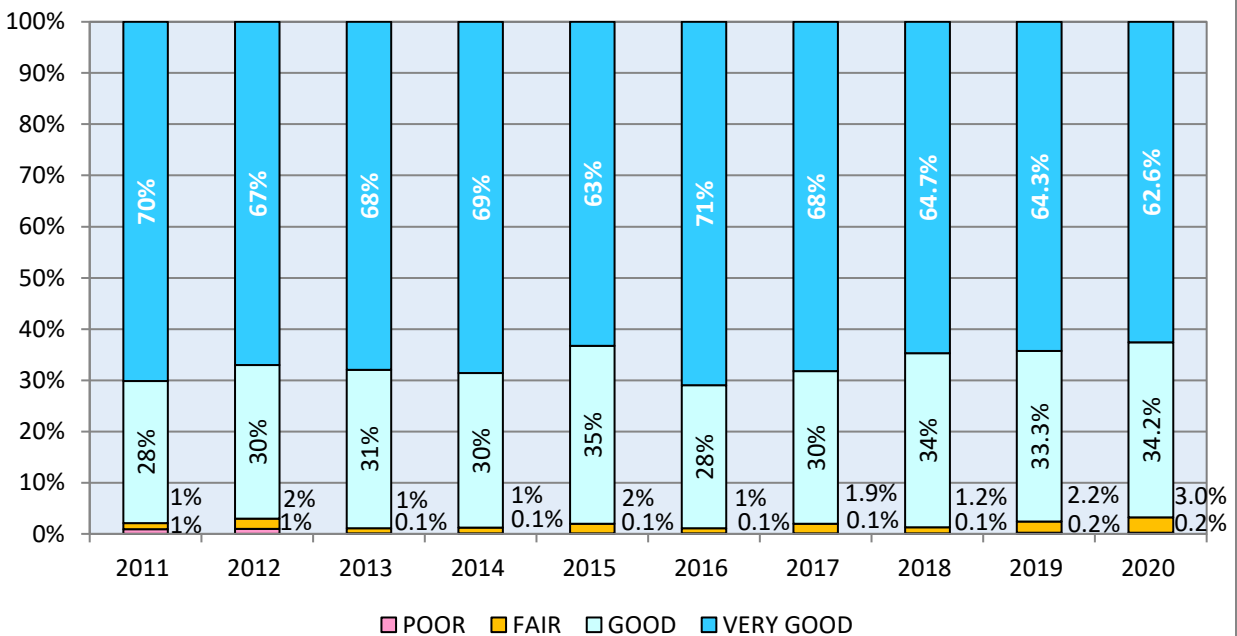

One of the key goals of pavement preservation is to prevent “very good” or “good” pavement from deteriorating. For roads with PCI scores in the 50s and 60s that are left unmaintained, pavement deteriorates at an accelerated rate. Road treatments for “fair” or “poor” streets are much more expensive, as it is often necessary to repair structural damage or even rebuild the road. The “worst-first” approach to pavement management is costly, time consuming, and disrupts traffic flow for extended periods of time.


The concept of pavement preservation relates to extending a pavement’s service life by carefully choosing surface treatments while the pavement is still in good condition. Various strategies for roadway treatment include:

- **Routine Maintenance:**
Scheduled, day-to-day activities (examples: crack sealing, repairing potholes, patches, maintaining channelization)
- **Preventive Maintenance:**
Series of low-cost treatments intended to reduce the rate of road deterioration and preserve the existing road system (examples: seal coats, thin asphalt overlay)
- **Rehabilitation/Reconstruction:**
Milling or removal of existing pavement, addressing subgrade problems, and constructing new asphalt structures

The success and cost-effectiveness of these treatments depend on choosing the optimal time to apply them, in order to get the greatest improvement possible for the lowest cost. By taking a proactive approach to maintaining our road network, we can provide the public with improved mobility and safer, smoother, longer-lasting pavements – and maximize the return on the City’s investment.

Effect of Treatments

Example: cost per square yard for a residential road over 55 years

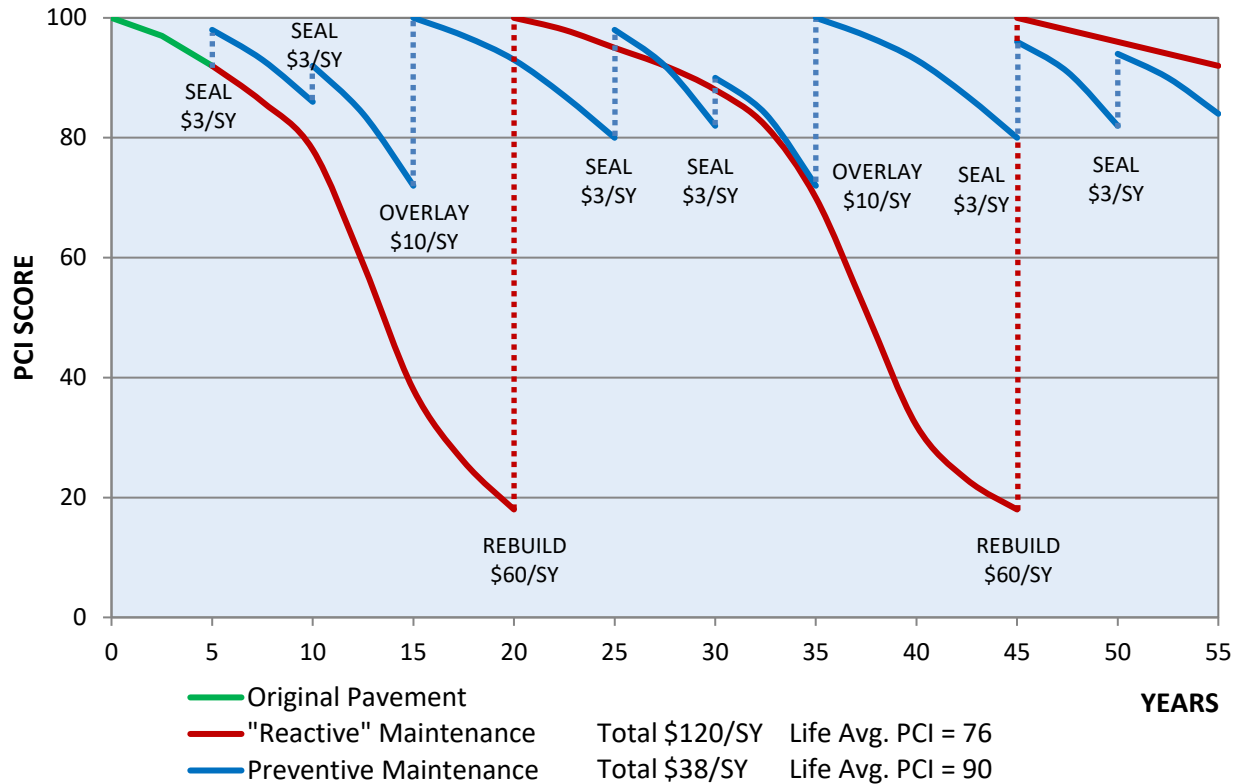

In the chart above, the red descending curves represent the “reactive” model of pavement treatment, in which roads deteriorate unchecked until they trigger major road rehabilitation. The blue curves illustrate the concept of pavement preservation, in which roads receive preventive maintenance regularly while still in good condition. Although prices for road treatments fluctuate and increase over time, the example serves to illustrate the obvious advantages to applying preventive maintenance.

Counting over the same period of time, the sum of the costs of preventive maintenance is substantially less than road reconstruction. This approach sustains a higher level of pavement performance and delays the need for rehabilitation. Benefits also include improved ride quality and safety, increased customer satisfaction, and reduced traffic congestion associated with major road repair.

Elements of Pavement Preservation

Treatment	Description	Expected Life of Treatment	Advantages	Disadvantages
Crack Seal	Localized treatment preventing water and debris from entering the road base and sub-base	3-5 years	• Low cost • Common, widely used • Effective	• Short life span • Only addresses cracks • Possible reflective cracking later
Slurry Seal or Microsurfacing	Surface treatment of fine aggregate and asphalt emulsion. Makes a cold mixed material that cures quickly to a hard wearing surface	5-8 years	• Waterproofs and protects surface • Reduces pavement oxidation • Slows surface raveling • Adds surface friction • Improves ride and profile	• Cure time dependent on weather conditions • Success dependent on experienced contractor and proper mix of ingredients
Chip Seal	Similar to slurry seal, with larger aggregate placed on top of asphalt binder	7-10 years	• Similar advantages as for slurry seals • More effective at sealing medium-severity cracking than other treatments	• Aggregate can become dislodged • Associated with increased road noise and rougher surface
Cape Seal	Chip seal applied, with layer of slurry seal/ microsurfacing on top	10-15 years	• Smoother ride than chip seal alone • Extended treatment life • Asphalt-like finish at lower cost	• More expensive than other seals
Thin Hot-Mix Asphalt Overlay	Thin layer (up to 1.25") applied to road surface	10-12 years	• Works well in all climate conditions • Improves ride quality • Corrects surface irregularities	• Provides no additional structural capacity • Subject to delamination and reflective cracking

BUDGET NEEDS CALCULATION

In order to run budget scenarios and ultimately develop an effective maintenance and rehabilitation strategy, the *StreetSaver* program first determines the maintenance “needs” of the roadway network. Because it costs less to maintain roads in good condition, *StreetSaver* calculates what it would take to improve the road system overall to an optimal PCI with no backlogged maintenance and then maintain it at that level (upper 80s/lower 90s). In this analysis a budget was calculated for ten years based on current treatment selections and unit costs, using an inflation factor of 3%. For each management section, the program projects the condition with and without treatment, recommends one or more treatments over the analysis period, and estimates treatment costs. The calculation tends to identify funding early for the poorer roads, so the estimated budget varies from year to year. Although greatly exceeding the City’s funding levels, the budget needs analysis represents an ideal funding strategy as calculated by *StreetSaver*.

The table below shows the level of expenditures, estimated at about \$107.1 million, that is needed to raise the City’s pavement condition to a network PCI average of around 90, and maintain that level while eliminating maintenance backlog. Of this amount, nearly \$17.4 million was designated for preventive maintenance (life-extending treatments), and about \$89.7 million for the more expensive rehabilitation and reconstruction treatments. The analysis also shows that if no road maintenance is applied over the next ten years, the overall PCI score will drop to 65 by 2030.

Year	PCI Treated	PCI Untreated	PM Cost	Rehab Cost	Cost
2021	91	82	\$4,729,185	\$24,598,087	\$29,327,272
2022	89	80	\$828,276	\$5,696,706	\$6,524,982
2023	88	78	\$792,595	\$4,679,258	\$5,471,853
2024	87	76	\$156,749	\$3,240,860	\$3,397,609
2025	87	75	\$77,428	\$6,104,659	\$6,182,087
2026	89	73	\$7,176,898	\$4,274,999	\$11,451,897
2027	88	71	\$1,661,860	\$4,353,917	\$6,015,777
2028	88	69	\$1,461,455	\$11,358,280	\$12,819,735
2029	89	67	\$338,808	\$18,998,877	\$19,337,685
2030	88	65	\$151,208	\$6,388,306	\$6,539,514
			% PM	PM Total Cost	Rehab Total Cost
			16.23%	\$17,374,462	\$89,693,949
					Total Cost
					\$107,068,411

Once maintenance needs are established for the road network, we can run several “what-if” analyses to develop a cost-effective maintenance and rehabilitation strategy. The impact of various budget scenarios can be evaluated by projecting pavement condition values and deferred maintenance over a period of time, and make clear the advantages and disadvantages of different funding levels and maintenance strategies.

For each analysis a portion of the annual budget was allocated to preventive maintenance, such as crack and surface seals. As was the case with the budget needs module, the scenarios take into account current unit costs with inflation and treatment options. Each scenario also forecasts a cost for deferred maintenance based on projected PCI scores. Deferred maintenance refers to pavement rehabilitation that is needed but cannot be performed due to budget limitations. Putting off needed street repairs allows pavement quality to gradually decrease, but it also makes those treatments much more expensive later on, as those street sections fall into the “fair” and “poor” categories. Once deemed in need of reconstruction, the software no longer considers a section for preventive maintenance. Deferred maintenance values relay a general trend and are prone to vary depending on actual maintenance done.

➤ **Scenario 1: Unfunded (No Budget)**

The first scenario predicts the impact on pavement condition if no funding is put toward roadway projects for the next ten years. The network PCI value is estimated to drop from 82.7 to 65.

➤ **Scenario 2: \$2.0 Million Annual Budget**

The City of Lacey recently formed a Transportation Benefit District (TBD) and proposed a 0.2% increase in sales tax in order to fund street maintenance. In July of 2017, the City began collecting revenues generated by this measure. Based on early returns, the annual income is estimated at \$2.0 million through the year 2030. The PCI drops to 73 over the duration of the ten-year analysis period.

➤ **Scenario 3: Maintain Current PCI (\$5.8 million/year)**

In this target-driven scenario, *StreetSaver* calculated what it would cost to sustain the current PCI of 82.7 during a ten-year period. The total cost came to about \$57.6 million, an average of roughly \$5.8 million each year.

➤ **Scenario 4: Unconstrained Budget (Approx. \$10.7 million/year)**


The “budget needs” study (see page 11) calculated that it would take \$107.1 million to immediately raise the network pavement condition to an ideal level and sustain that level for nine additional years. The amount per year varied depending on the maintenance backlog, but equated to roughly \$10.7 million annually. The PCI score would increase from 83.7 to 88 in the 10 year period.


Scenario 1: Unfunded (No Budget)

In the first scenario, no funds are set aside for pavement preservation. The network PCI is estimated to decrease to 65 from the current value of 82.7. By the year 2030, no streets would be in the “very good” category, and categories “fair” and “poor” would make up 21.2% of all streets. Deferred maintenance is estimated to increase to nearly \$77 million.

Summary from Scenario 1: Unfunded

Year	PCI	Deferred Maintenance
2021	82	\$29,326,989
2030	65	\$76,964,022

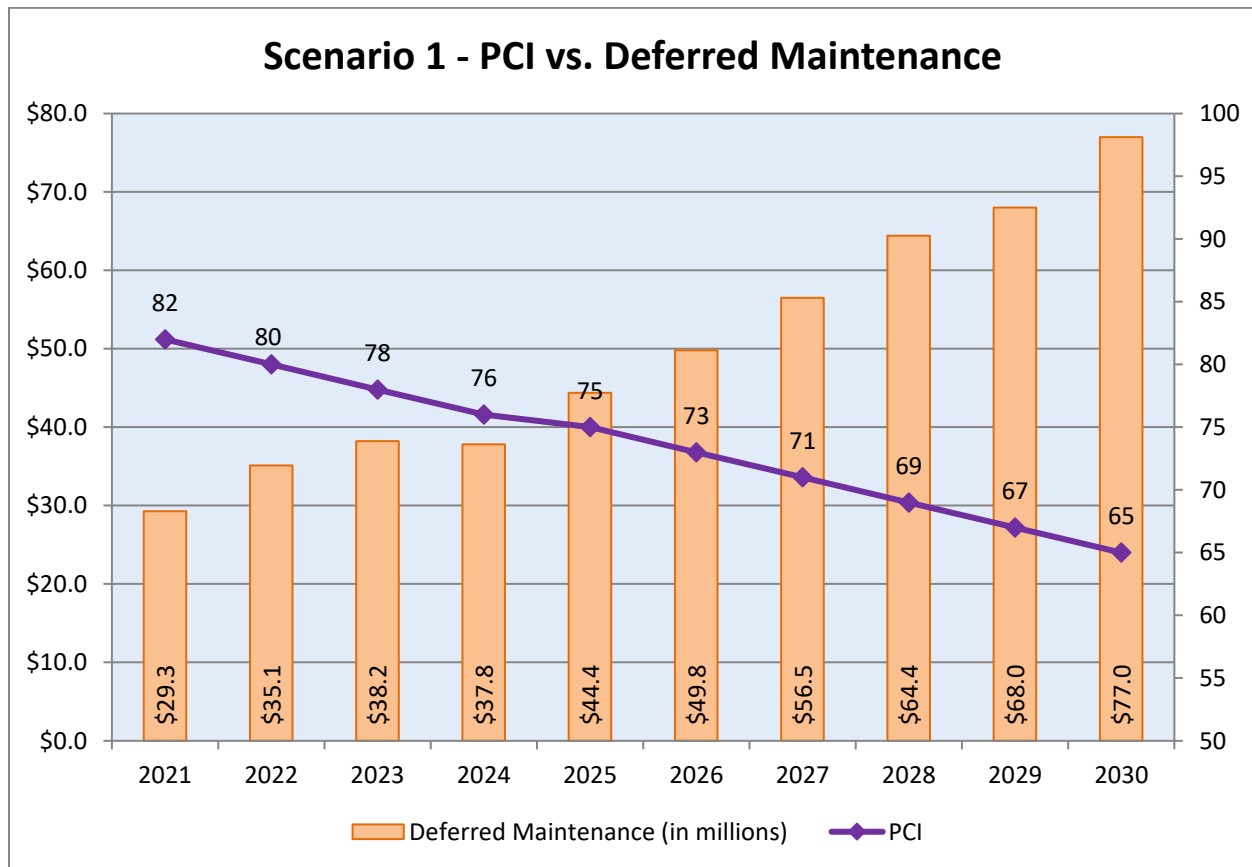

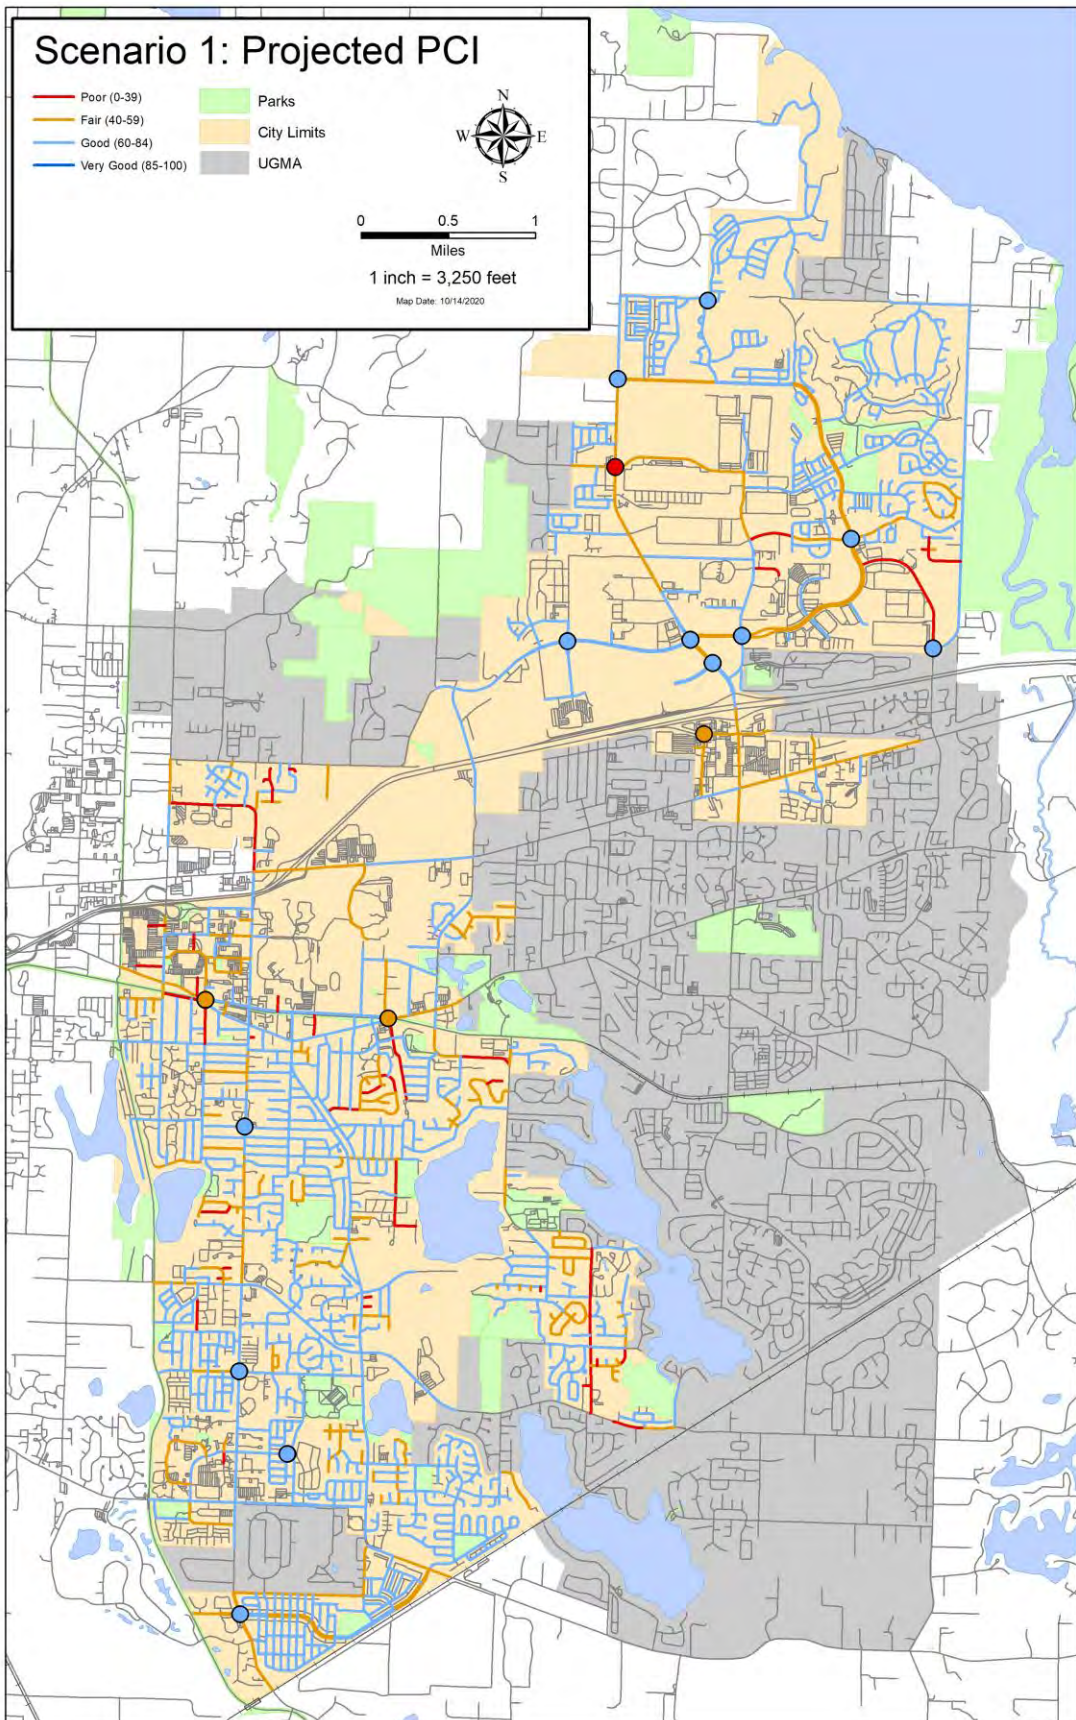



Scenario 2: \$2.0 Million Annual Budget

This scenario shows the effects of an annual \$2.0 million budget strategy toward the City's road network, beginning in 2021 and ending in 2030. The overall PCI score would steadily decrease from 82.7 to 73 by 2030. The cost of deferred maintenance would go up from \$25.8 million in 2021 to \$64.2 million in 2030, as an increasing number of streets would require reconstruction. At this investment level, in ten years' time 10.8% of the network would be in the "fair" category and 2.0% in the "poor" category.

Summary from Scenario 2: \$2.0 Million Annual Budget

Year	PCI	Deferred Maintenance
2021	83	\$25,804,133
2030	73	\$64,240,789

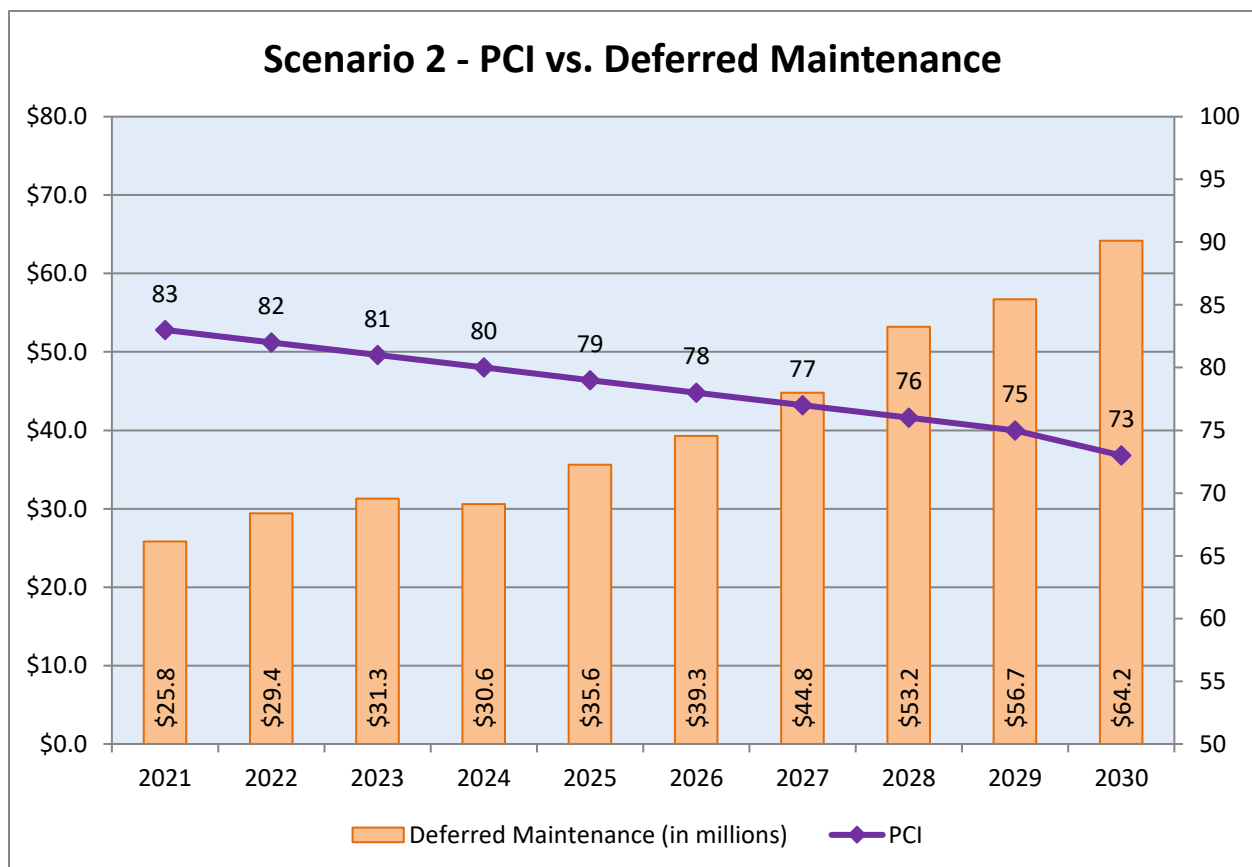

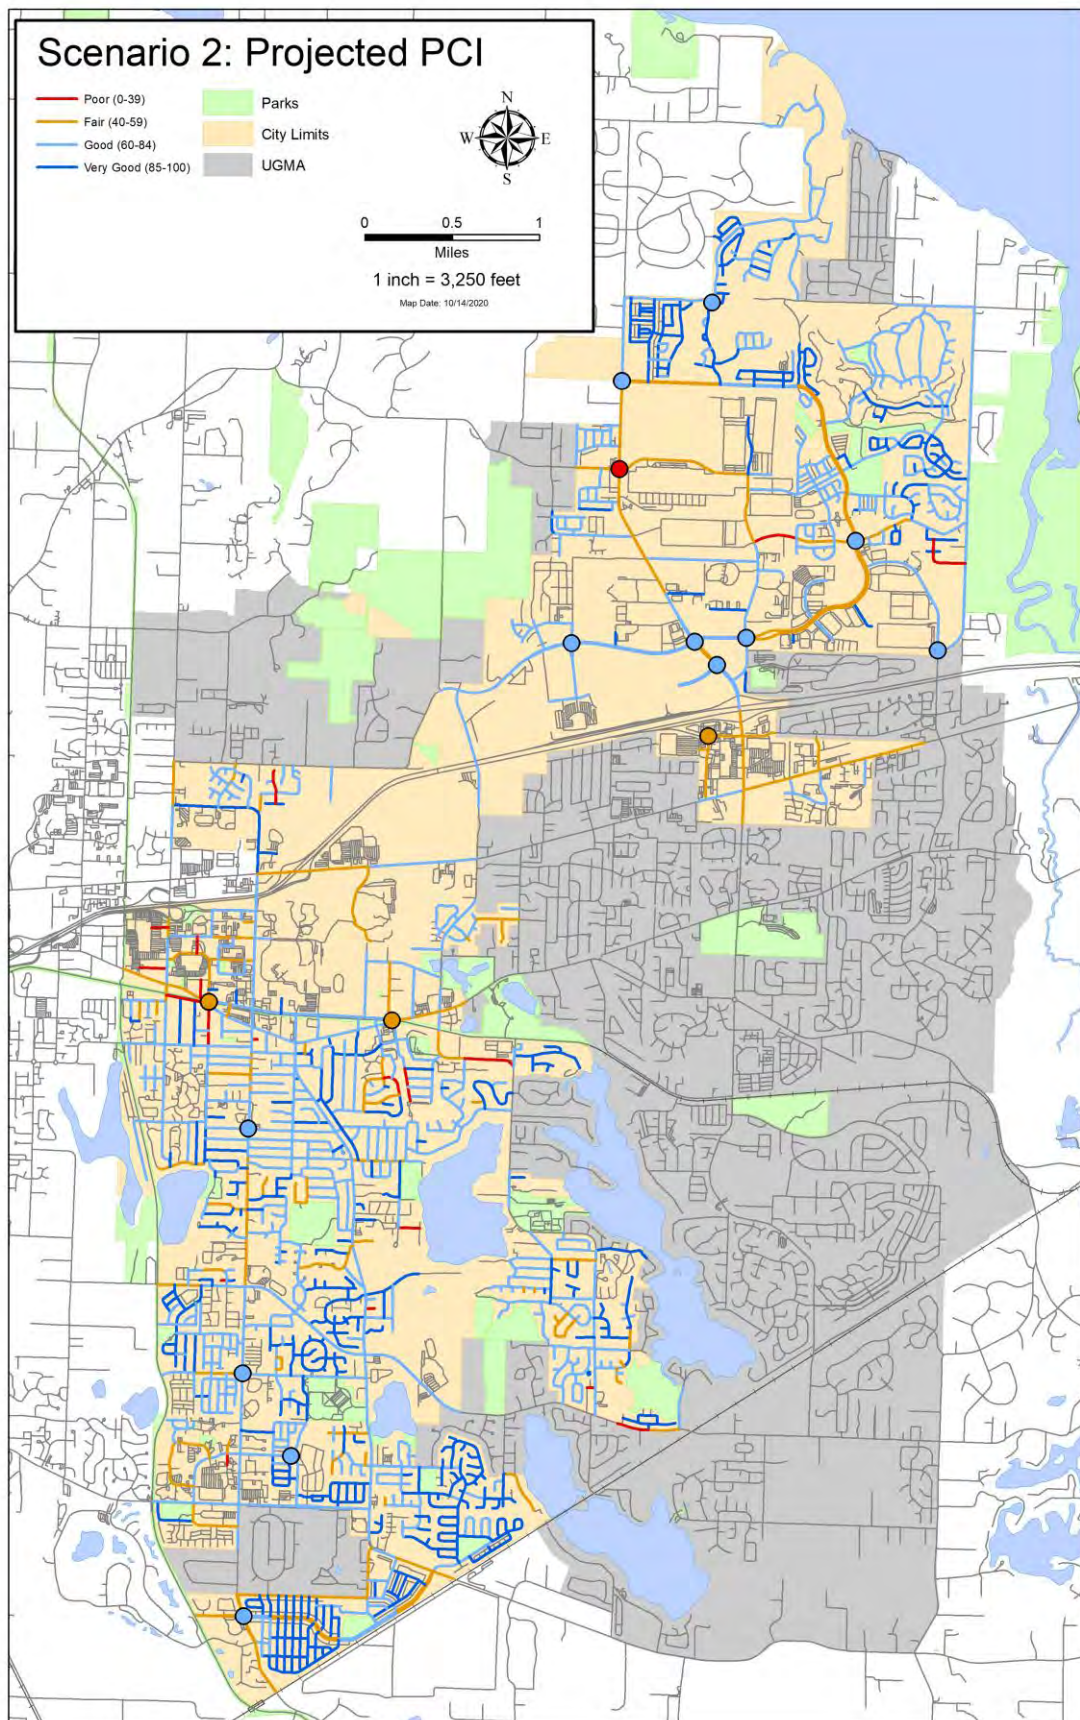



Scenario 3: Maintain Current PCI

This scenario shows what it would take to maintain the current PCI of 82.7 over a ten-year period. The *StreetSaver* program calculates an amount of \$5.8 million per year to reach this goal. The cost of deferred maintenance would increase from \$24.8 million to \$28.3 million. 93.2% of the network would be classified as Good or Very Good under this investment schedule. Only 1.1% of the network would fall under the Poor category.

Summary from Scenario 3: Maintain Current PCI

Year	PCI	Deferred Maintenance
2021	83	\$24,778,100
2030	83	\$28,301,516

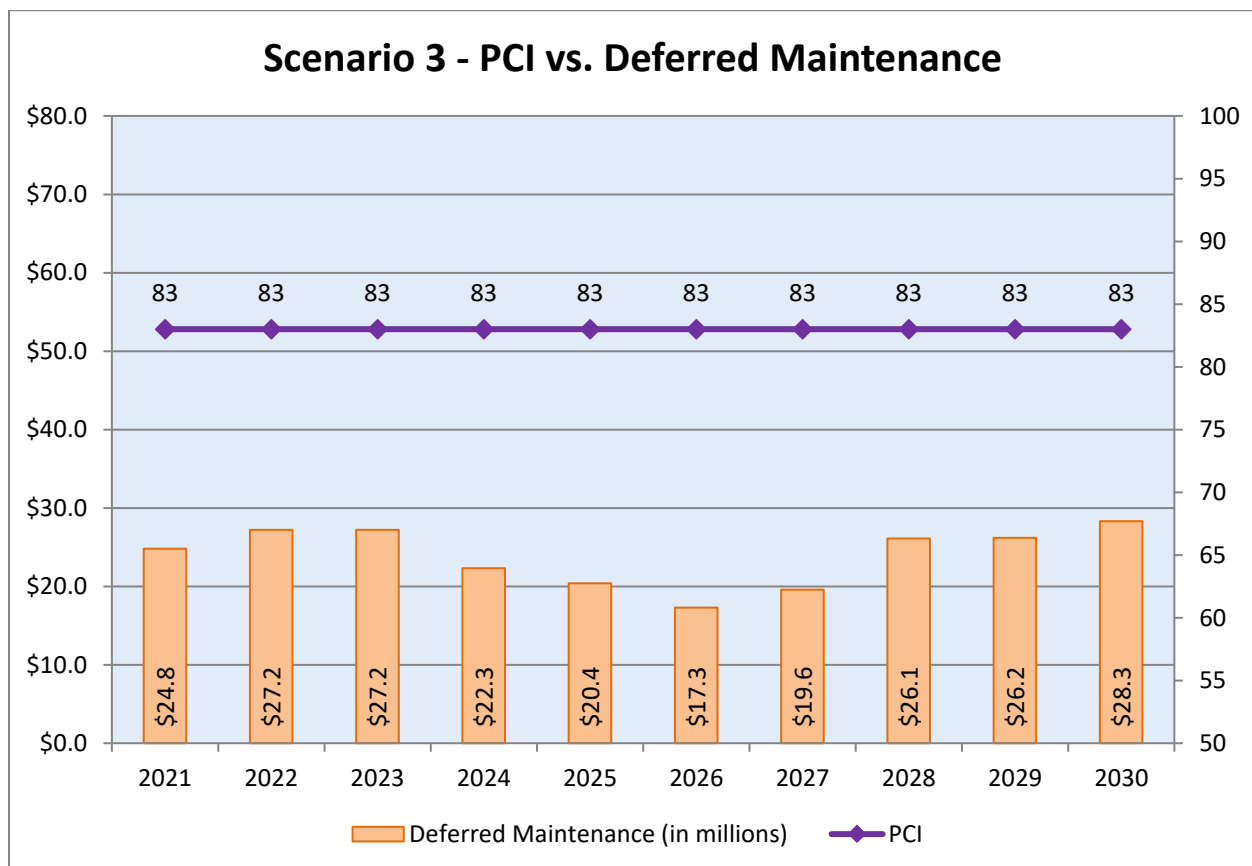

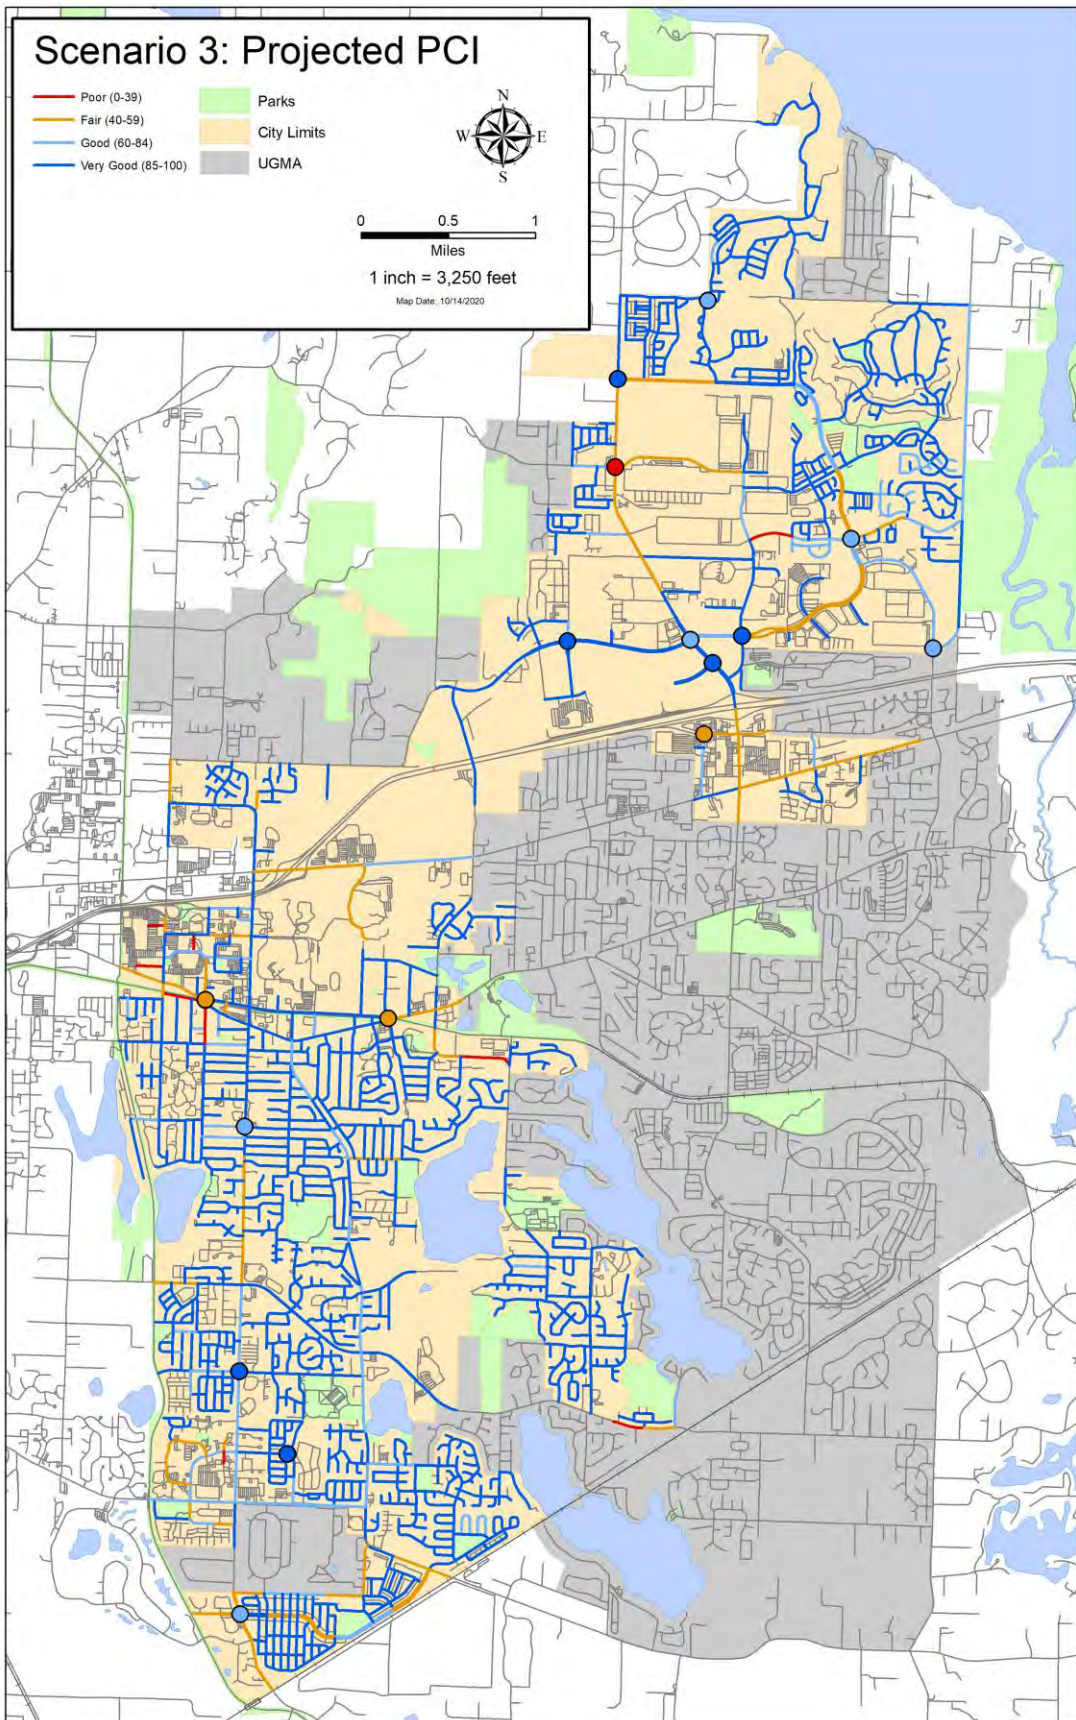



Scenario 4: Unconstrained Budget

In this scenario, an unconstrained amount is applied in 2020 to bring the network PCI to the Budget Needs condition of 90. Each successive year, an amount is placed towards preventative maintenance based on demand of the StreetSaver algorithm. Approximately \$107.1 million would be spent over the 10 year period averaging to roughly \$10.7 million annually. By the year 2029, about 69.4% of the network would be in the “very good” category and the remaining 30.6% in the “good” category. Deferred maintenance would be eliminated after year one of this scenario based on each road being constantly maintained to stay above the StreetSaver threshold for reconstruction in the 10 year window and the unconstrained budget able to exceed the yearly recommendations for preventative maintenance and rehabilitation.



Summary from Scenario 4: Unconstrained Budget

Year	PCI	Deferred Maintenance
2021	90	\$3,888,529
2030	87	\$0

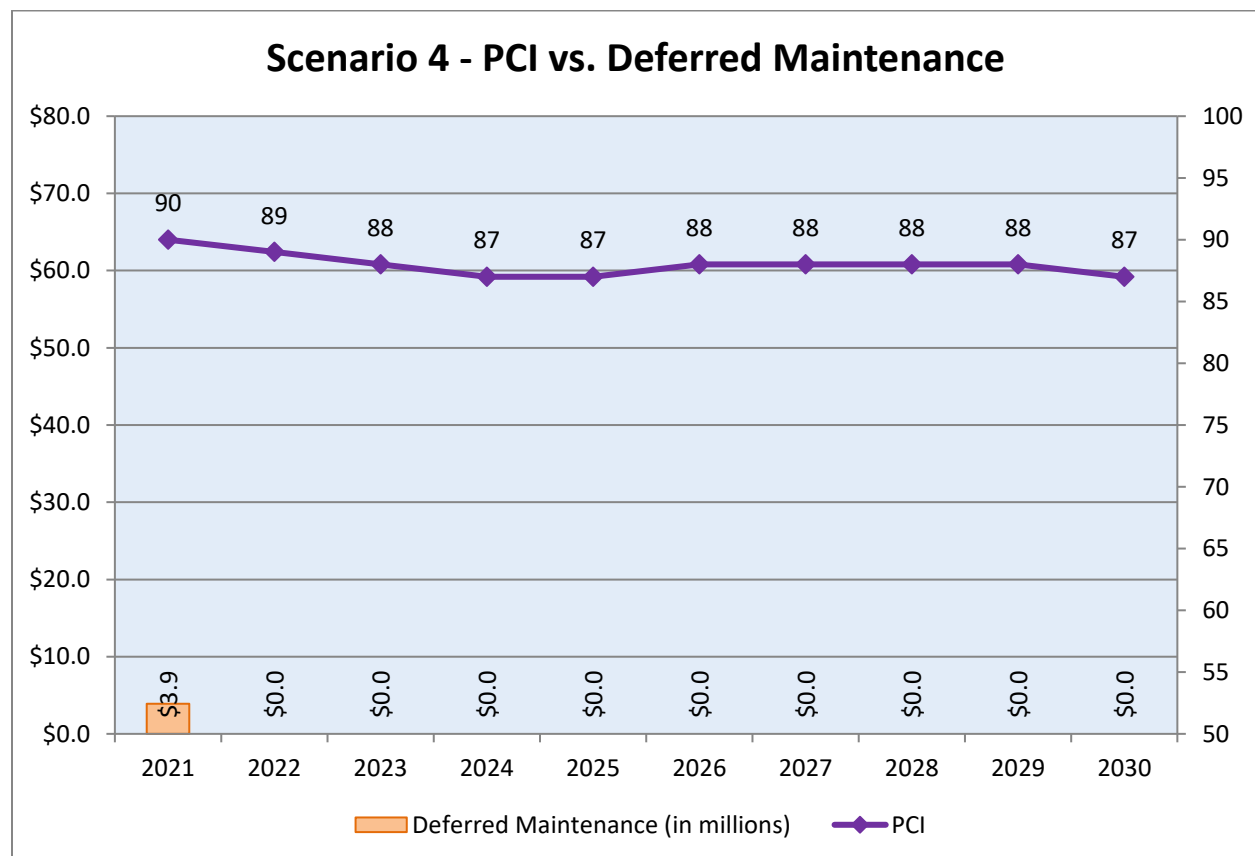

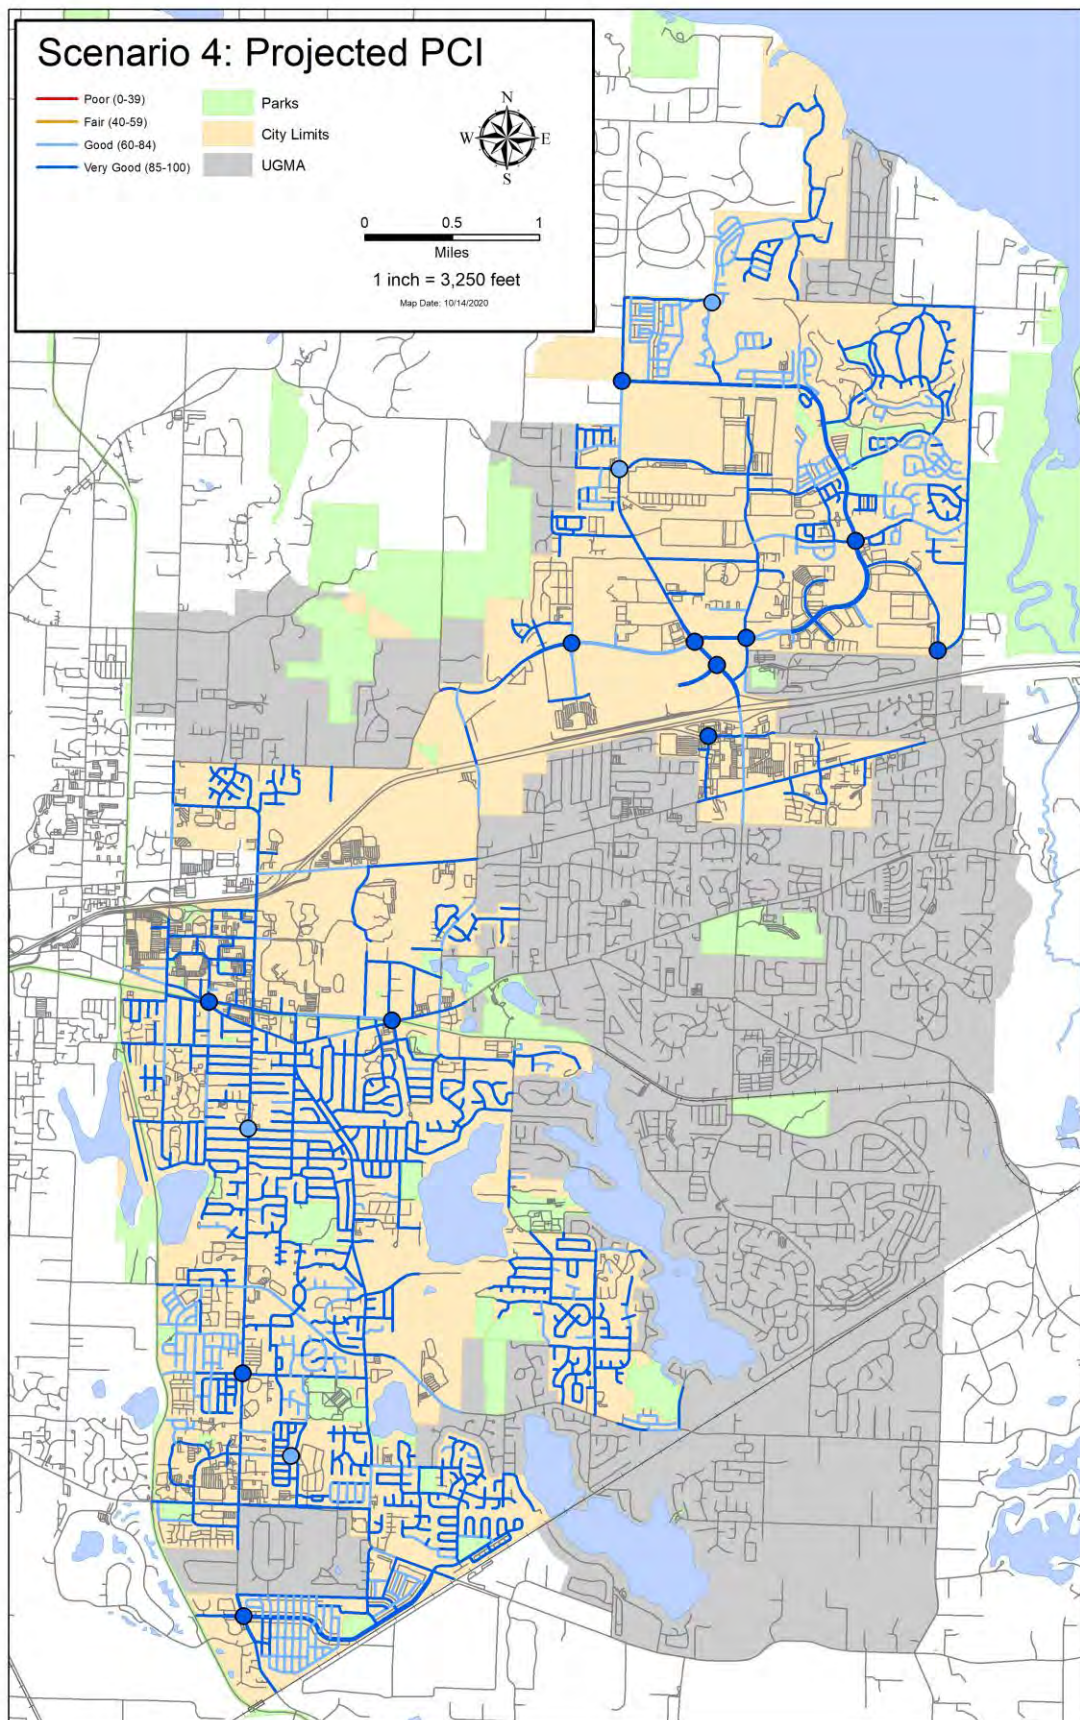

Scenario Comparison

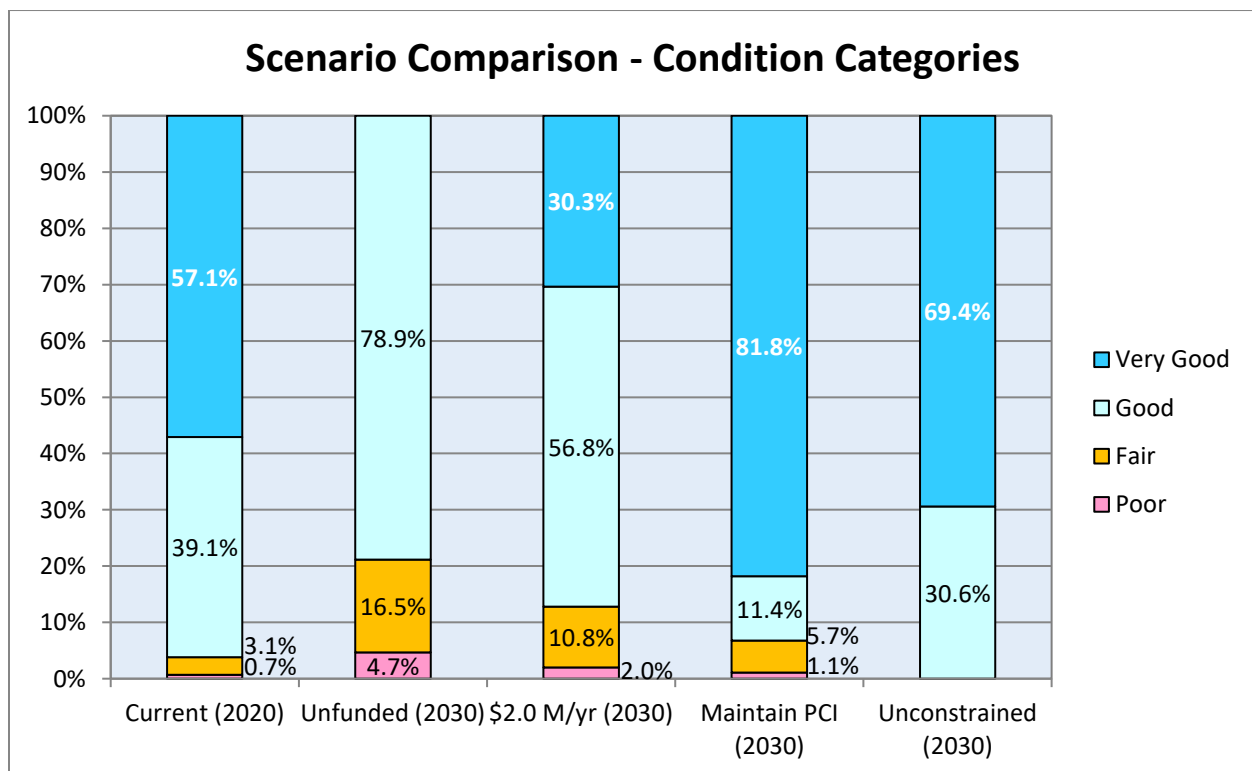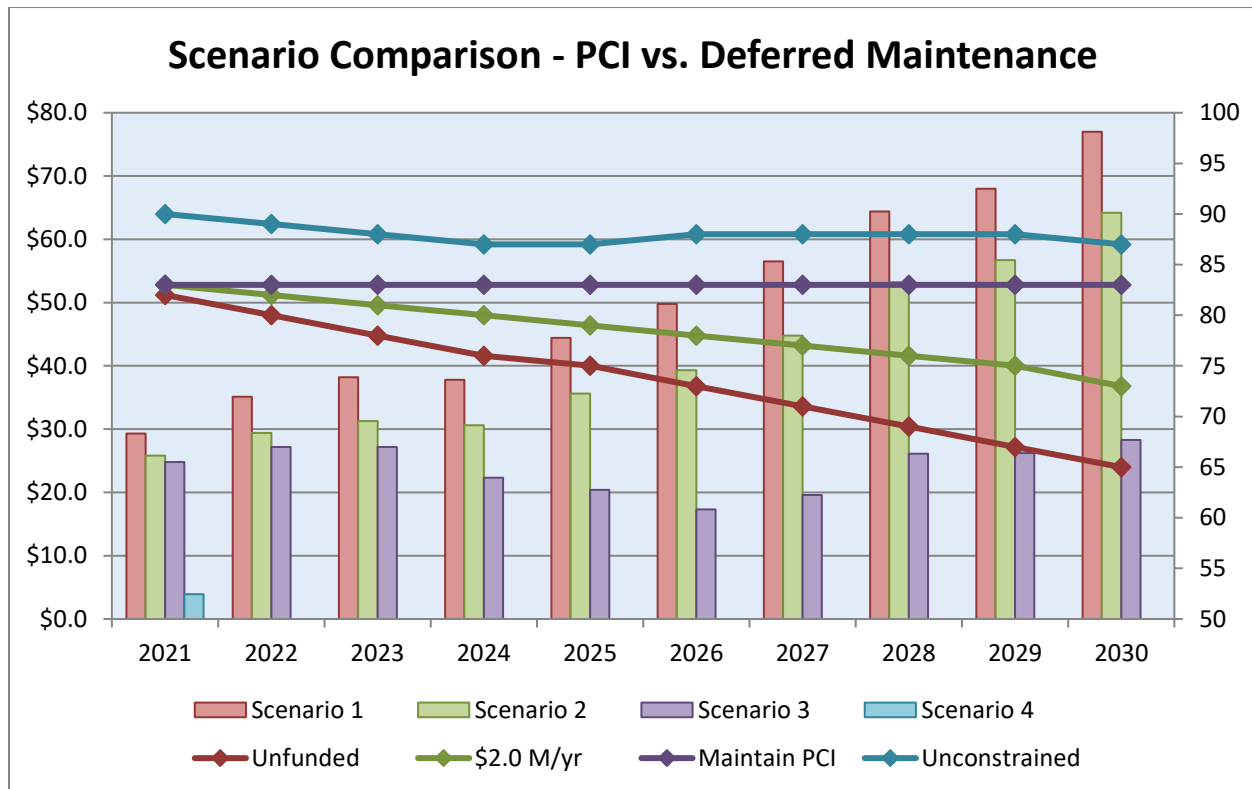

This page intentionally left blank.


ROAD REHABILITATION HISTORY

	TREATMENT DESCRIPTION	LANE MILES	AREA (SQ. FT.)	ASPHALT COST
2011	Pulverize with 2" HMA Overlay	4.75	333,300	\$65/TON
	Plane with 2" HMA Overlay	1.34	100,500	
	2" HMA Overlay	1.46	130,900	
	OVERLAY/RECONST. TOTAL	7.55	564,700	
	Pavement Repair	-	15,840	
	Slurry Seal	2.39	232,420	
	Street Projects: 2011 Street Overlay, 2011 Waterline Replacement			
2012	Reconstruct Structure (6" HMA)	1.92	109,960	\$67/TON
	Plane with 2" HMA Overlay	12.02	755,700	
	3" HMA Overlay	0.42	45,200	
	2" HMA Overlay	0.39	21,420	
	OVERLAY/RECONST. TOTAL	14.74	932,280	
	Pavement Repair	-	6,400	
	Street Projects: Carpenter Rd Reconstruction, Ruddell Rd Overlay, Marvin Rd/32 nd Ave			
2013	Reconstruct Structure (4" HMA)	0.73	79,470	\$75/TON
	Reconstruct Structure (3" HMA)	0.95	59,760	
	Pulverize with 3" HMA	2.01	113,990	
	Pulverize with 2" HMA	0.28	19,200	
	Plane with 2" HMA Overlay	0.69	65,880	
	OVERLAY/RECONST. TOTAL	4.66	338,300	
	Street Projects: 2013 Street Overlay			
2014	Pulverize with 4" HMA	1.50	120,030	\$80/TON
	Pulverize with 3" HMA	0.45	31,930	
	Plane with 2" HMA Overlay	0.11	7,280	
	Plane with 1" HMA Overlay	0.08	6,720	
	OVERLAY/RECONST. TOTAL	2.14	165,960	
	Pavement Repair	-	11,270	
	Slurry Seal	6.56	521,970	
	Street Projects: 2014 Street Overlay			

	TREATMENT DESCRIPTION	LANE MILES	AREA (SQ. FT.)	ASPHALT COST
2015	Reconstruct with 4" Fiber HMA	1.76	118,800	\$84/TON
	Street Projects: 2015 Street Overlay			
2016	Reconstruct with 8" Fiber HMA	0.82	57,800	\$77/TON
	Pulverize with 3" HMA	1.31	81,200	
	Pulverize with 2" HMA	7.69	524,100	
	Plane with 2" Fiber HMA	0.43	40,930	
	OVERLAY/RECONST. TOTAL	10.25	704,030	
	Pavement Repair		14,000	
	Street Projects: College to Ruddell, Shady Lane/Hicks Lake, Marvin Rd Widening			
2017	Reconstruct with 8" Fiber HMA	2.10	164,060	\$92/TON
	Street Projects: Hogum Bay Rd Improvements			
2018	Reconstruct with 4" Fiber HMA	0.24	18,400	\$123/TON
	Pulverize with 4" Fiber HMA	0.49	33,700	
	Pulverize with 3" HMA	0.69	39,300	
	Pulverize with 2" Fiber HMA	0.98	62,300	
	Pulverize with 2" HMA	0.78	46,100	
	Plane with 3" HMA	0.16	9,600	
	Plane with 2.5" Fiber HMA	1.39	117,500	
	OVERLAY/RECONST. TOTAL	4.73	326,900	
	Street Projects: 2018 Street Overlay, 2017 Water Improvements, Lift Station #2 Replacement			
2019	Reconstruct with 3" Fiber HMA	11.69	769,000	\$111/TON
	OVERLAY/RECONST. TOTAL	11.69	769,600	
	Street Projects: College St. & Yelm Hwy. Super T Pavement Rehabilitation			
2020	Plane with 6" Fiber HMA	0.30	36,800	\$95/TON
	Pulverize with 4" Fiber HMA	2.58	240,680	
	Plane with 6" Fiber HMA	2.45	202,320	
	OVERLAY/RECONST. TOTAL	5.33	479,800	
	Street Projects: College/22 nd Roundabout, 2020 Overlay			

College St. & 22nd Ave Roundabout

The 2009 College Street Corridor Study between Lacey Boulevard SE and 37th Avenue SE identified a cross section and preferred alignments with traffic control devices along the corridor. The roundabout at College Street SE and 22nd Avenue SE is Phase 1 of the corridor improvements and was funded by a State Bike & Pedestrian Grant. The project included construction of the roundabout at 22nd Avenue SE as well as new sidewalks, curb ramps, illumination, access control, landscaping, and other urban amenities.

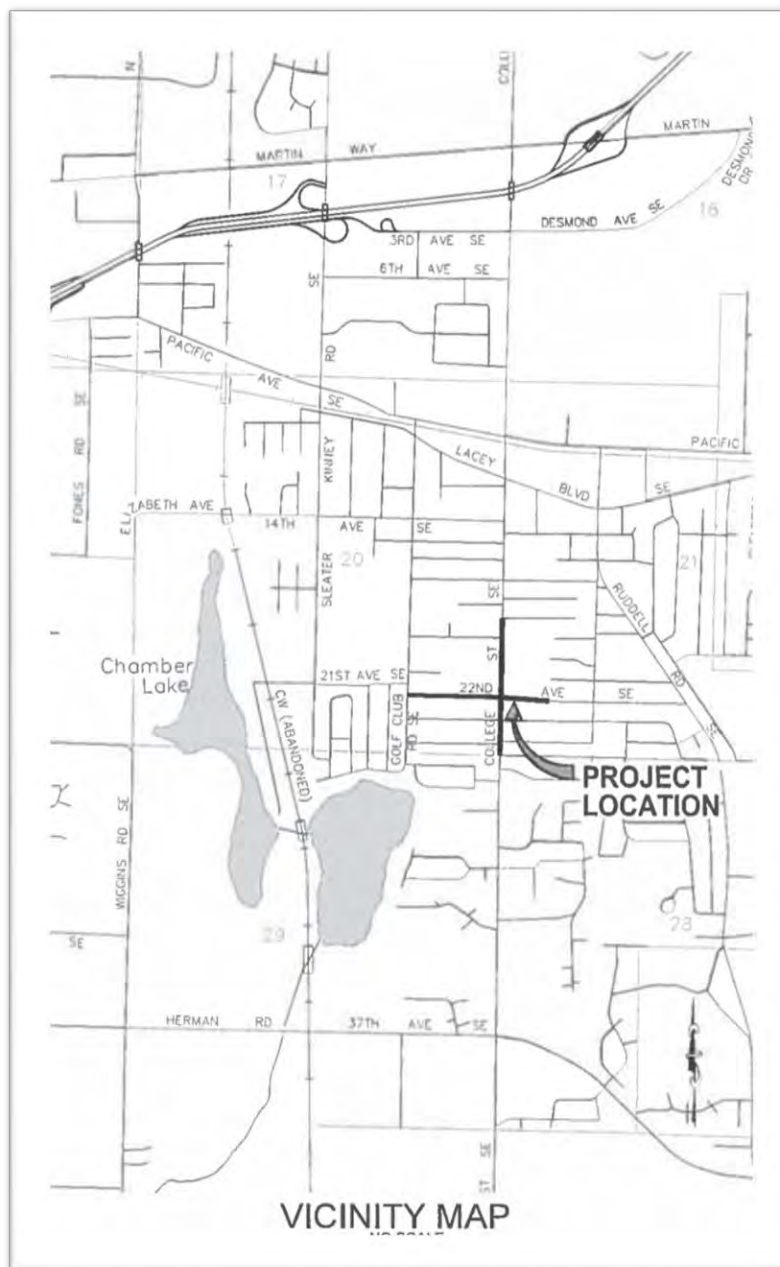




2020 Overlay (Meridian Rd, Orion Dr, & Meridian/Orion Roundabout)

The 2020 Overlay Project composed of two sections of roadway near the northeast city limits.

- Reconstruction of 0.30 lane miles of Orion Drive SE and the roundabout at the Intersection with Meridian Road with 6" of fiber reinforced HMA.
- Reconstruction of 2.58 lane miles of Meridian Road east of the roundabout at Orion Drive SE and north of 31st Street SE with 4" HMA.

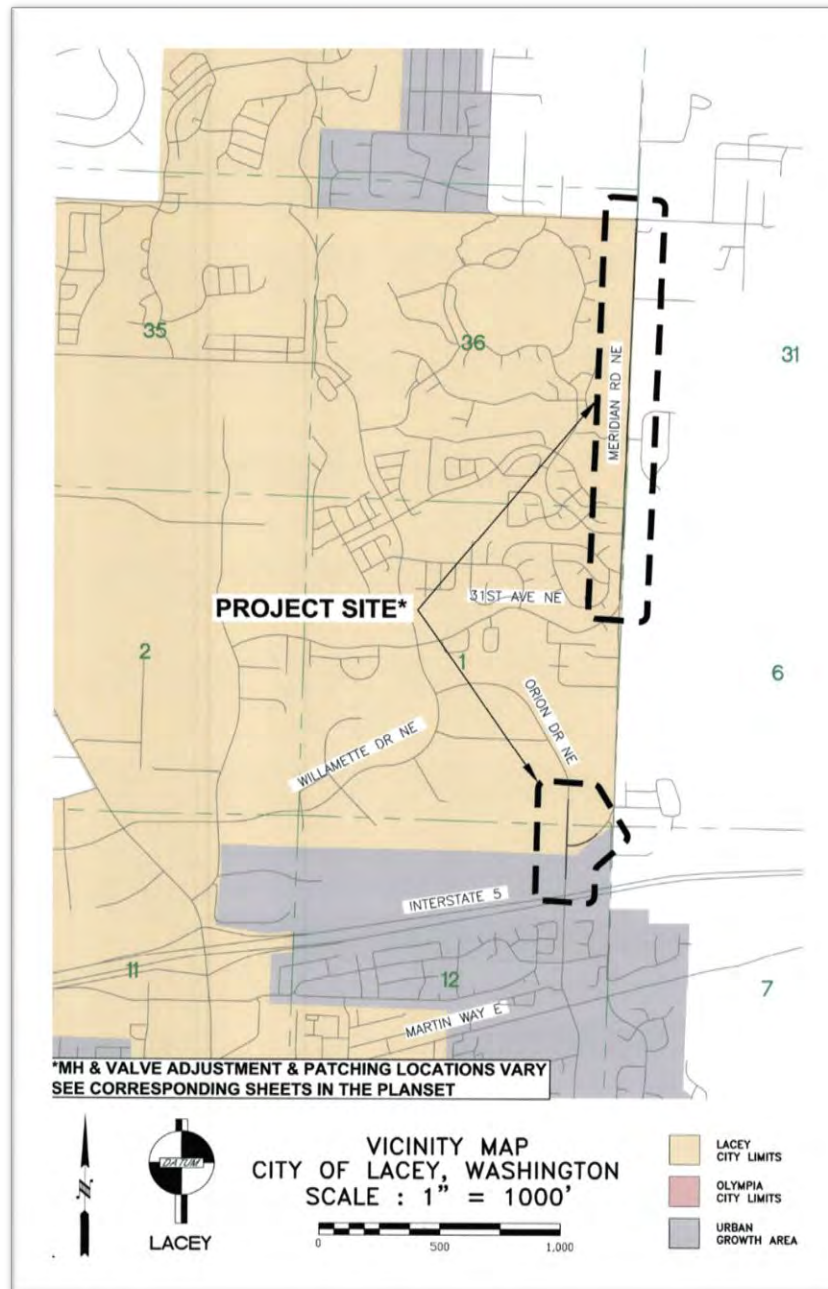



I-5 – SR510 Interchange Reconstruction

The WSDOT project to reconstruct the I-5 interchange at Marvin Rd (Exit 111) included roadway rehabilitation on 2 sections of Lacey roadway. A grind and inlay of 0.79 lane miles of Marvin Road north of the I-5 corridor to the Main Street Roundabout as well as the Roundabout at the intersection.



This page intentionally left blank.

Pavement Rating (PCI) Map

- Poor (0-39)
- Fair (40-59)
- Good (60-84)
- Very Good (85-100)
- Parks
- City Limits
- UGMA




0 0.5 1
Miles

1 inch = 3,250 feet

Map Date: 10/14/2020

A-1

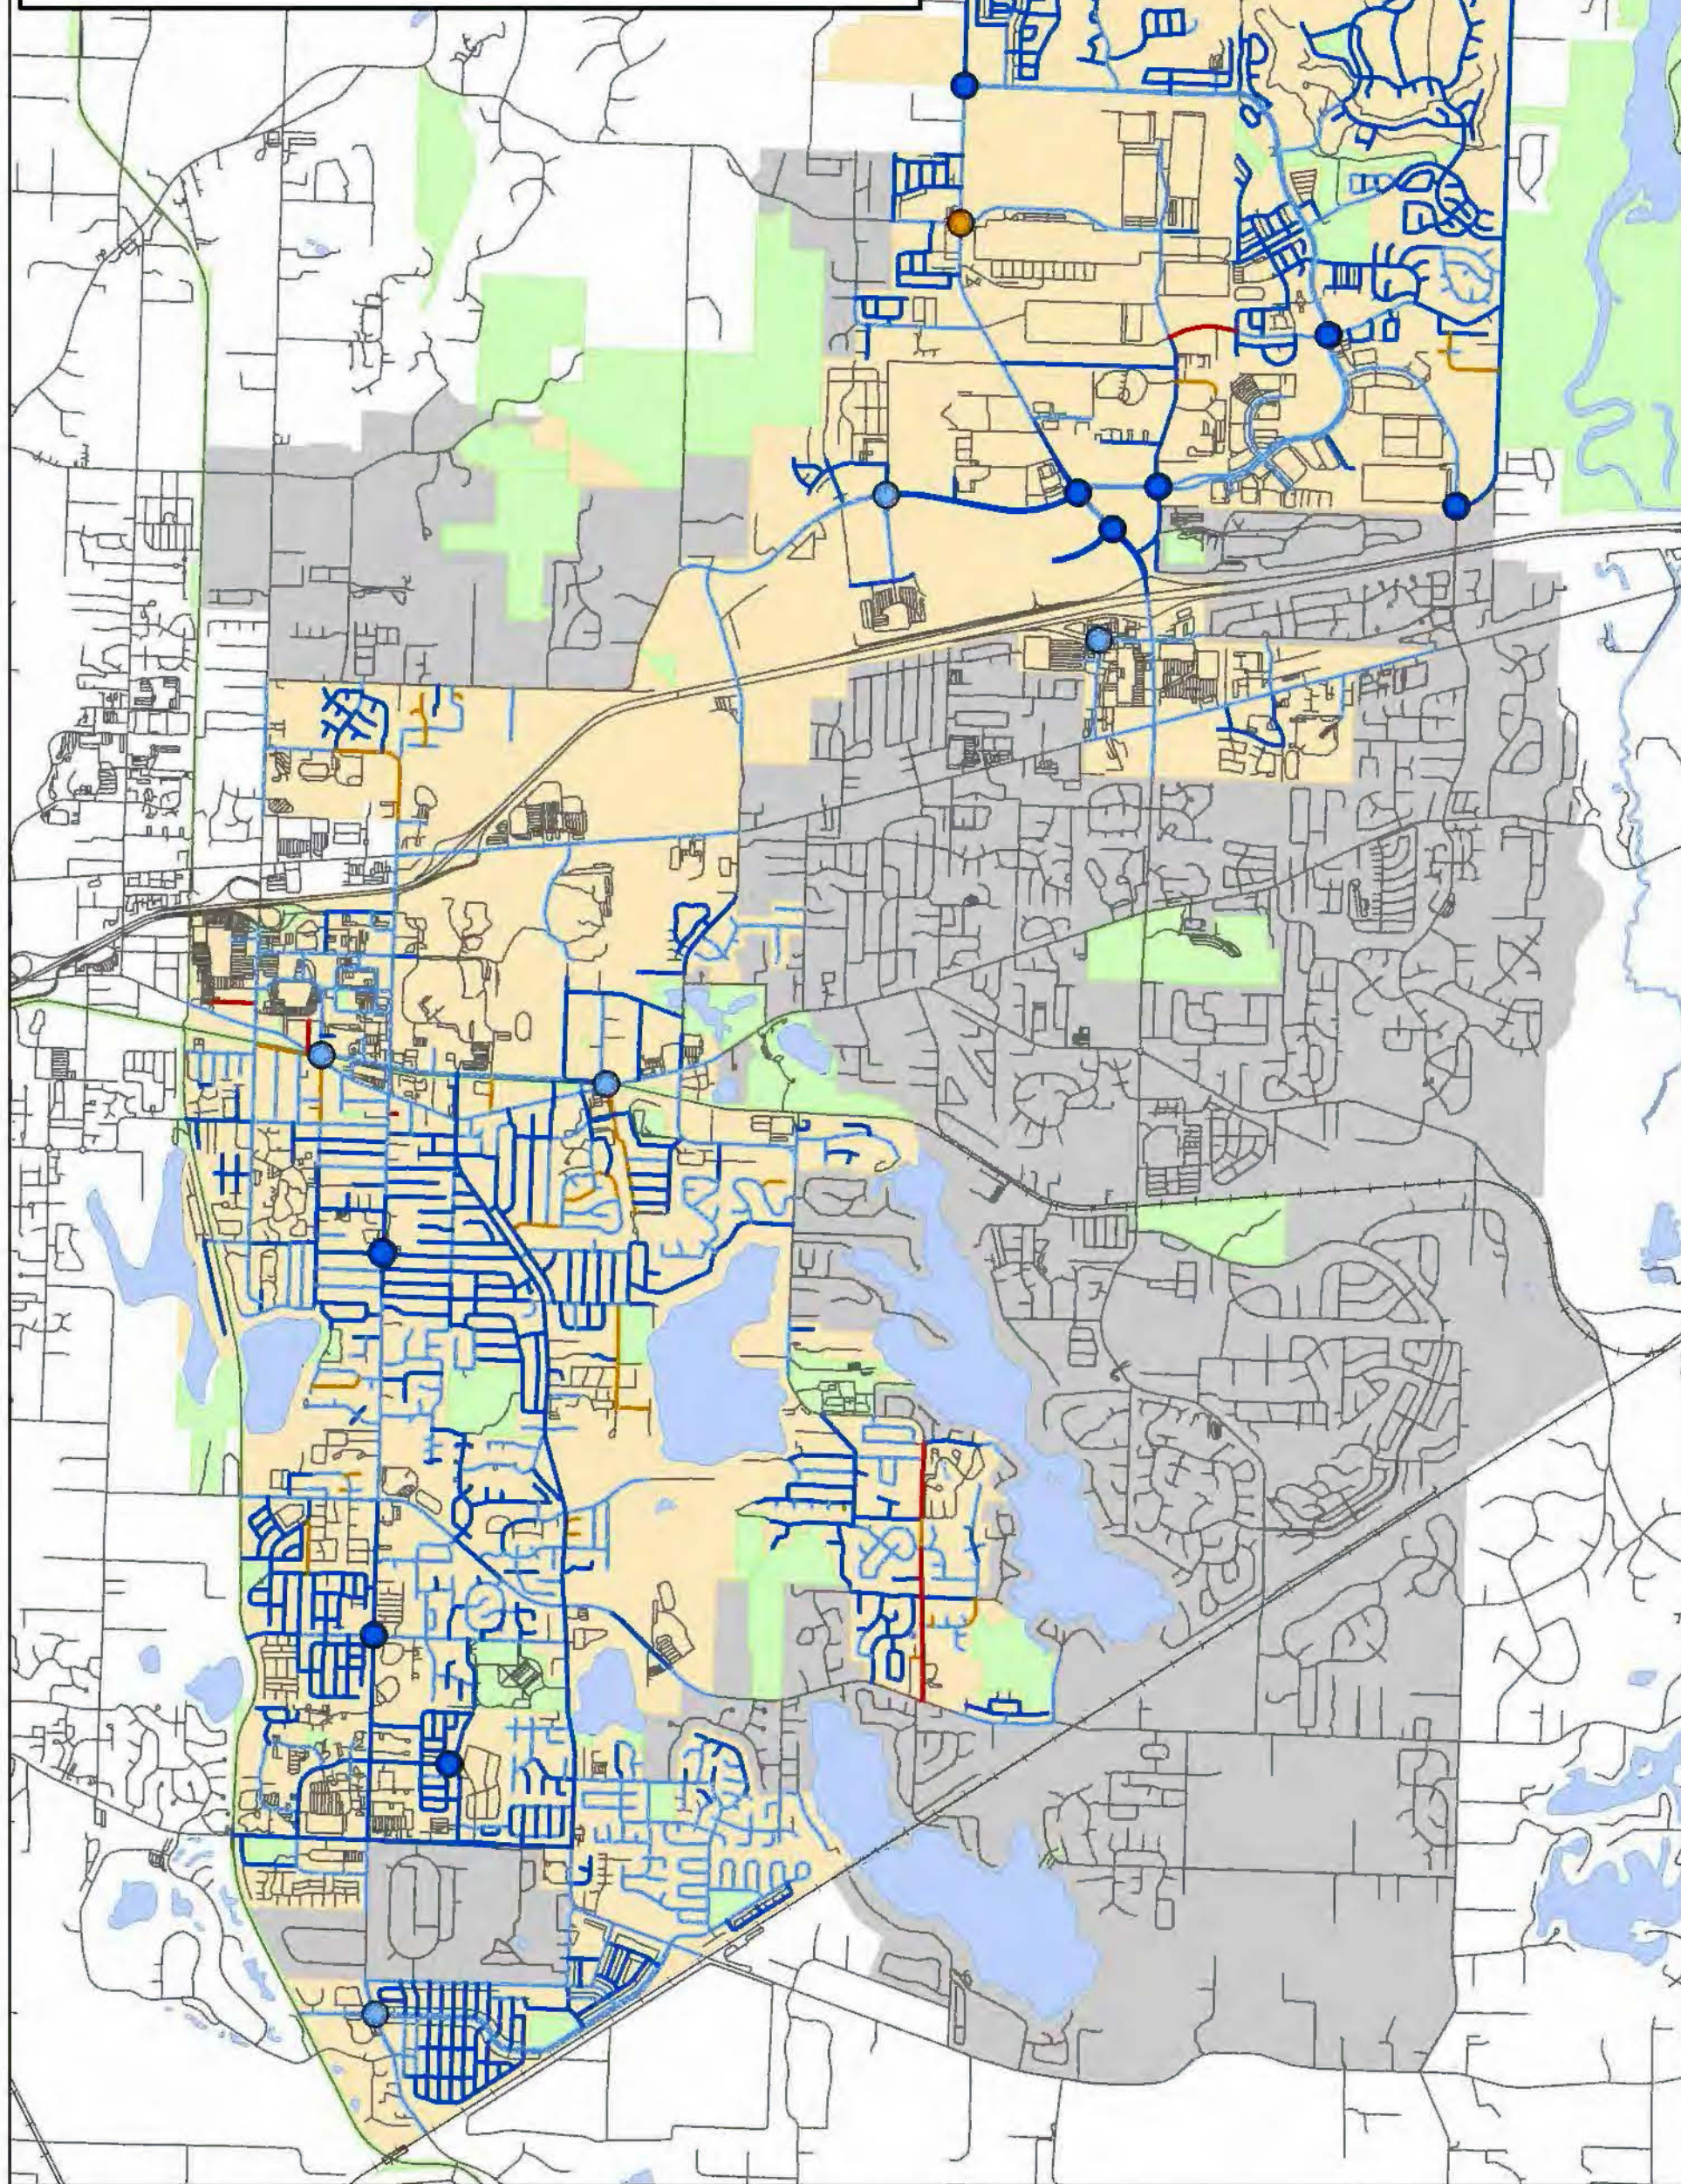

Estimated Remaining Service Life (RSL) Map


- 0-10
- 11-20
- 21-30
- 31+
- Parks
- City Limits
- UGMA



0 0.5 1
Miles

1 inch = 3,250 feet

Map Date: 10/28/2020

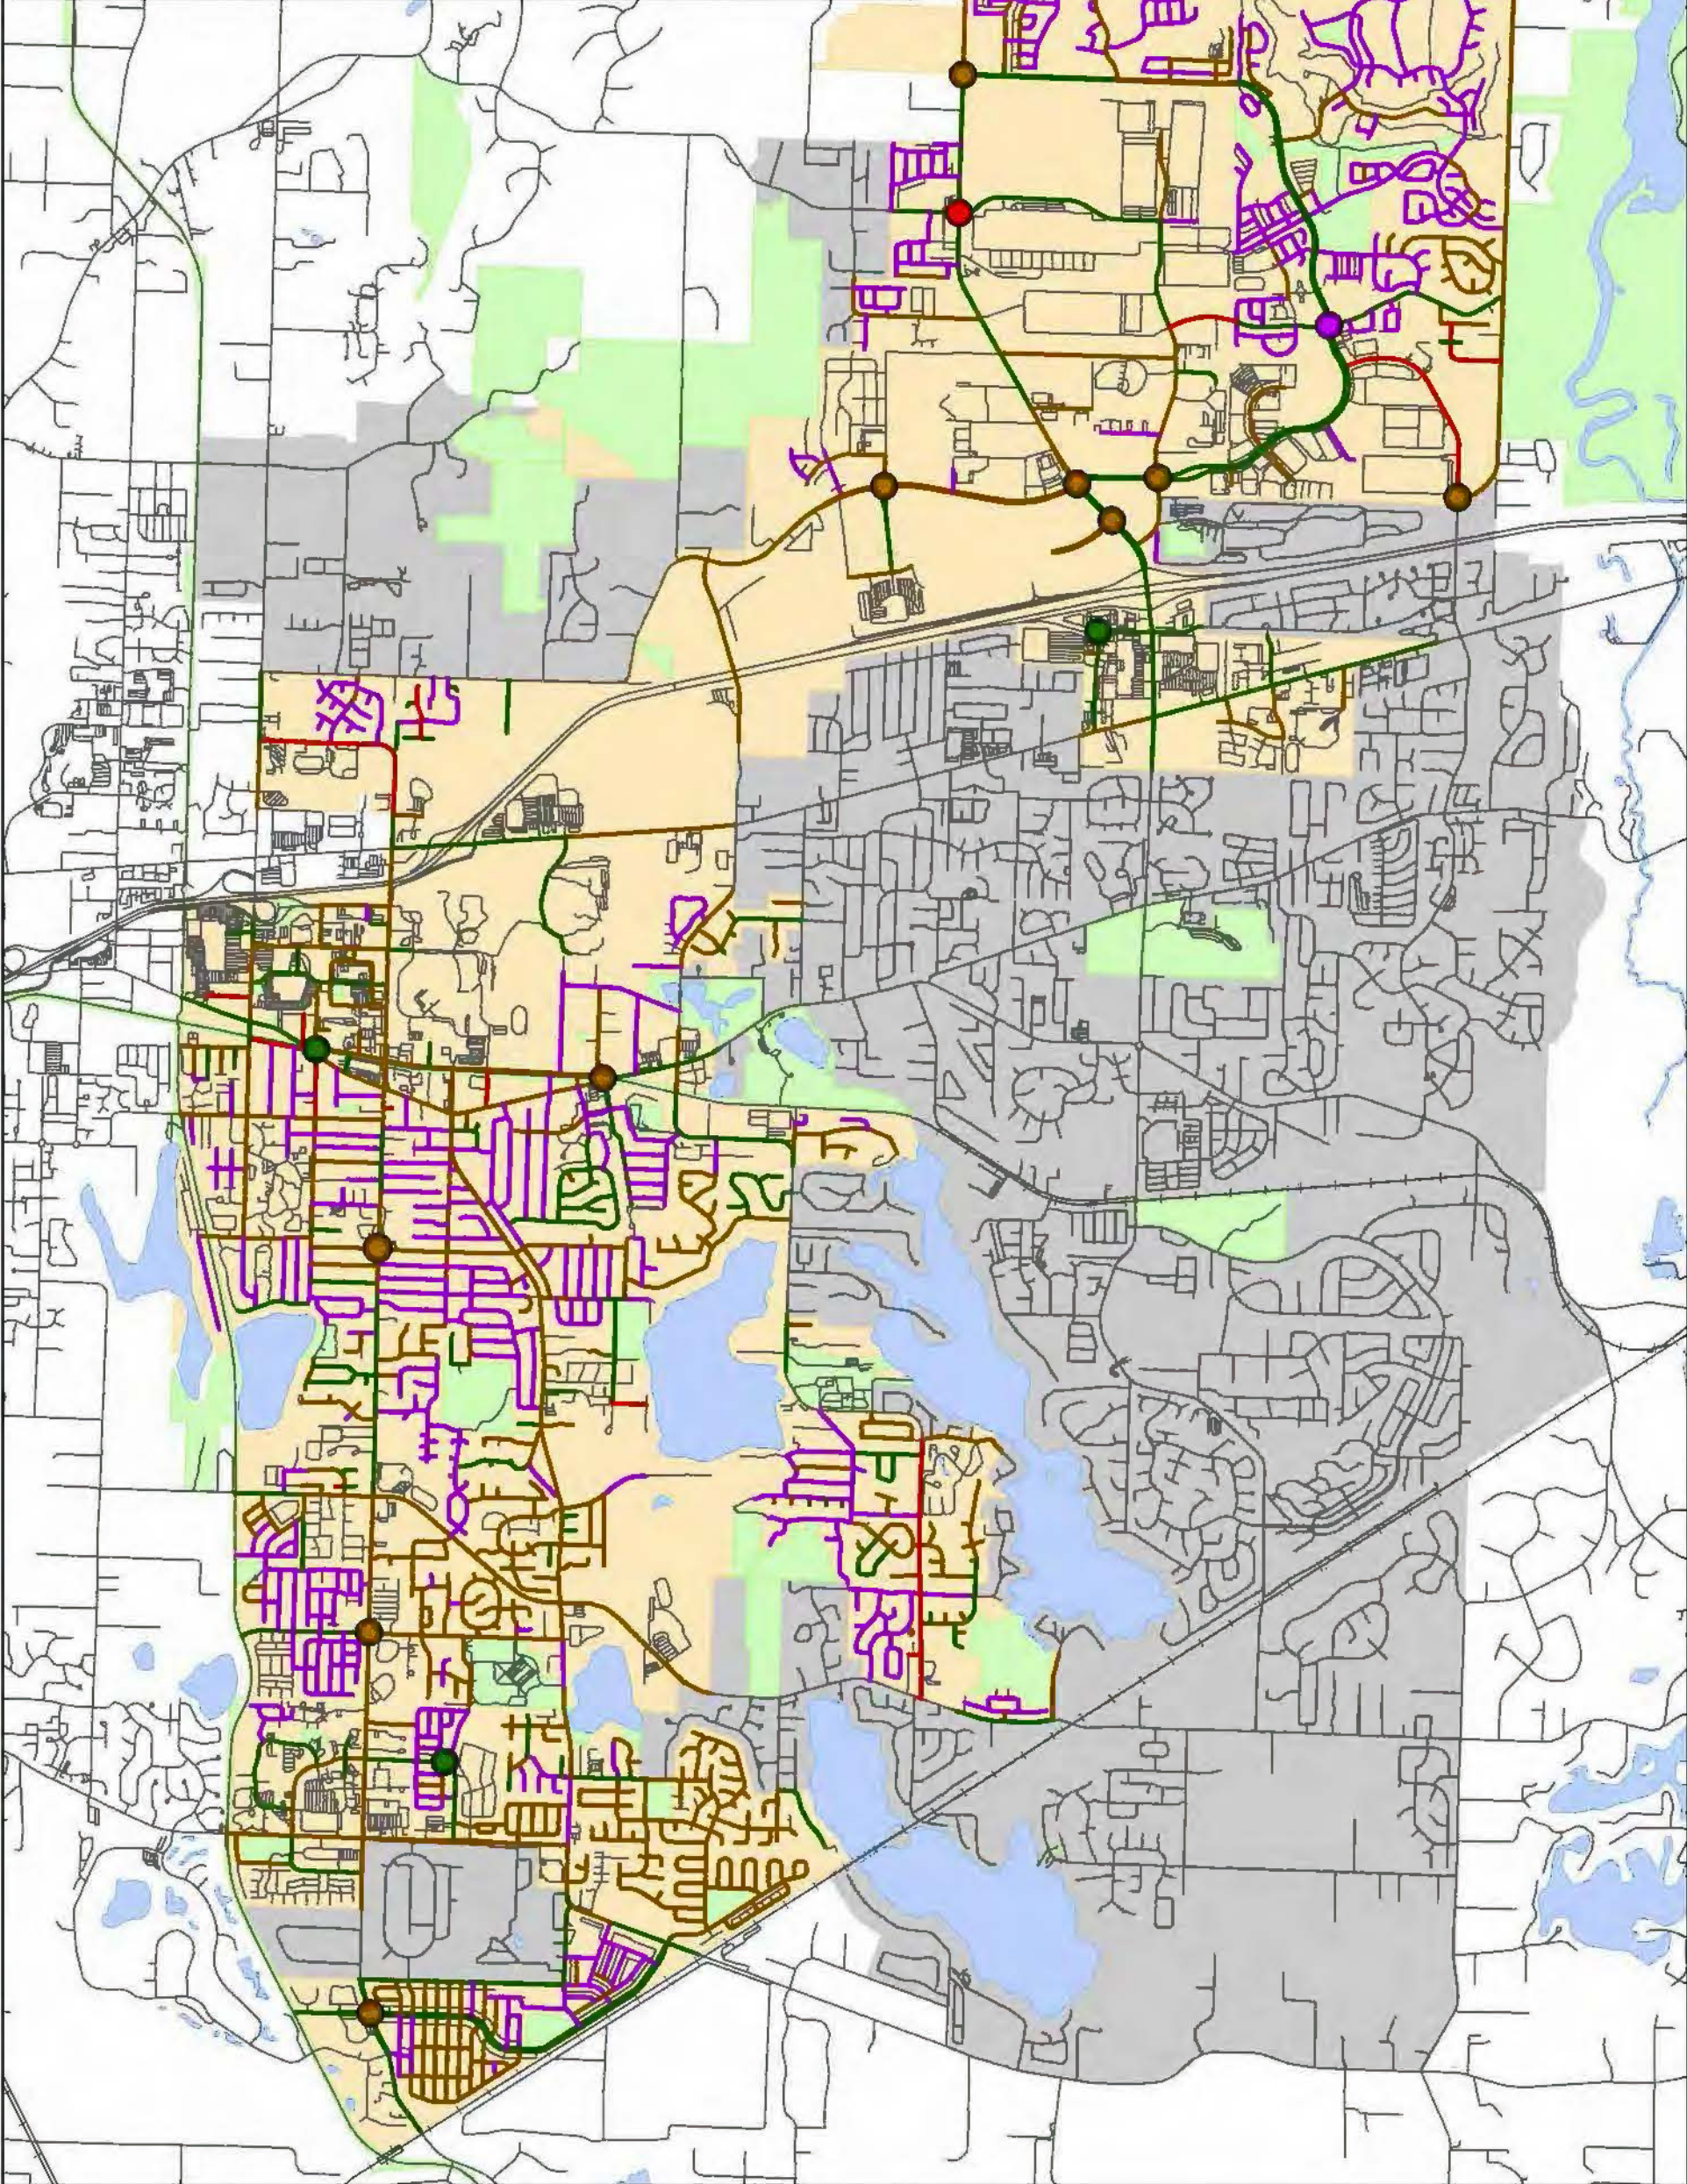

Functional Classification Map


- Arterial
- Collector
- Residential
- Parks
- City Limits
- UGMA



0 0.5 1
Miles

1 inch = 3,250 feet

Map Date: 10/14/2020

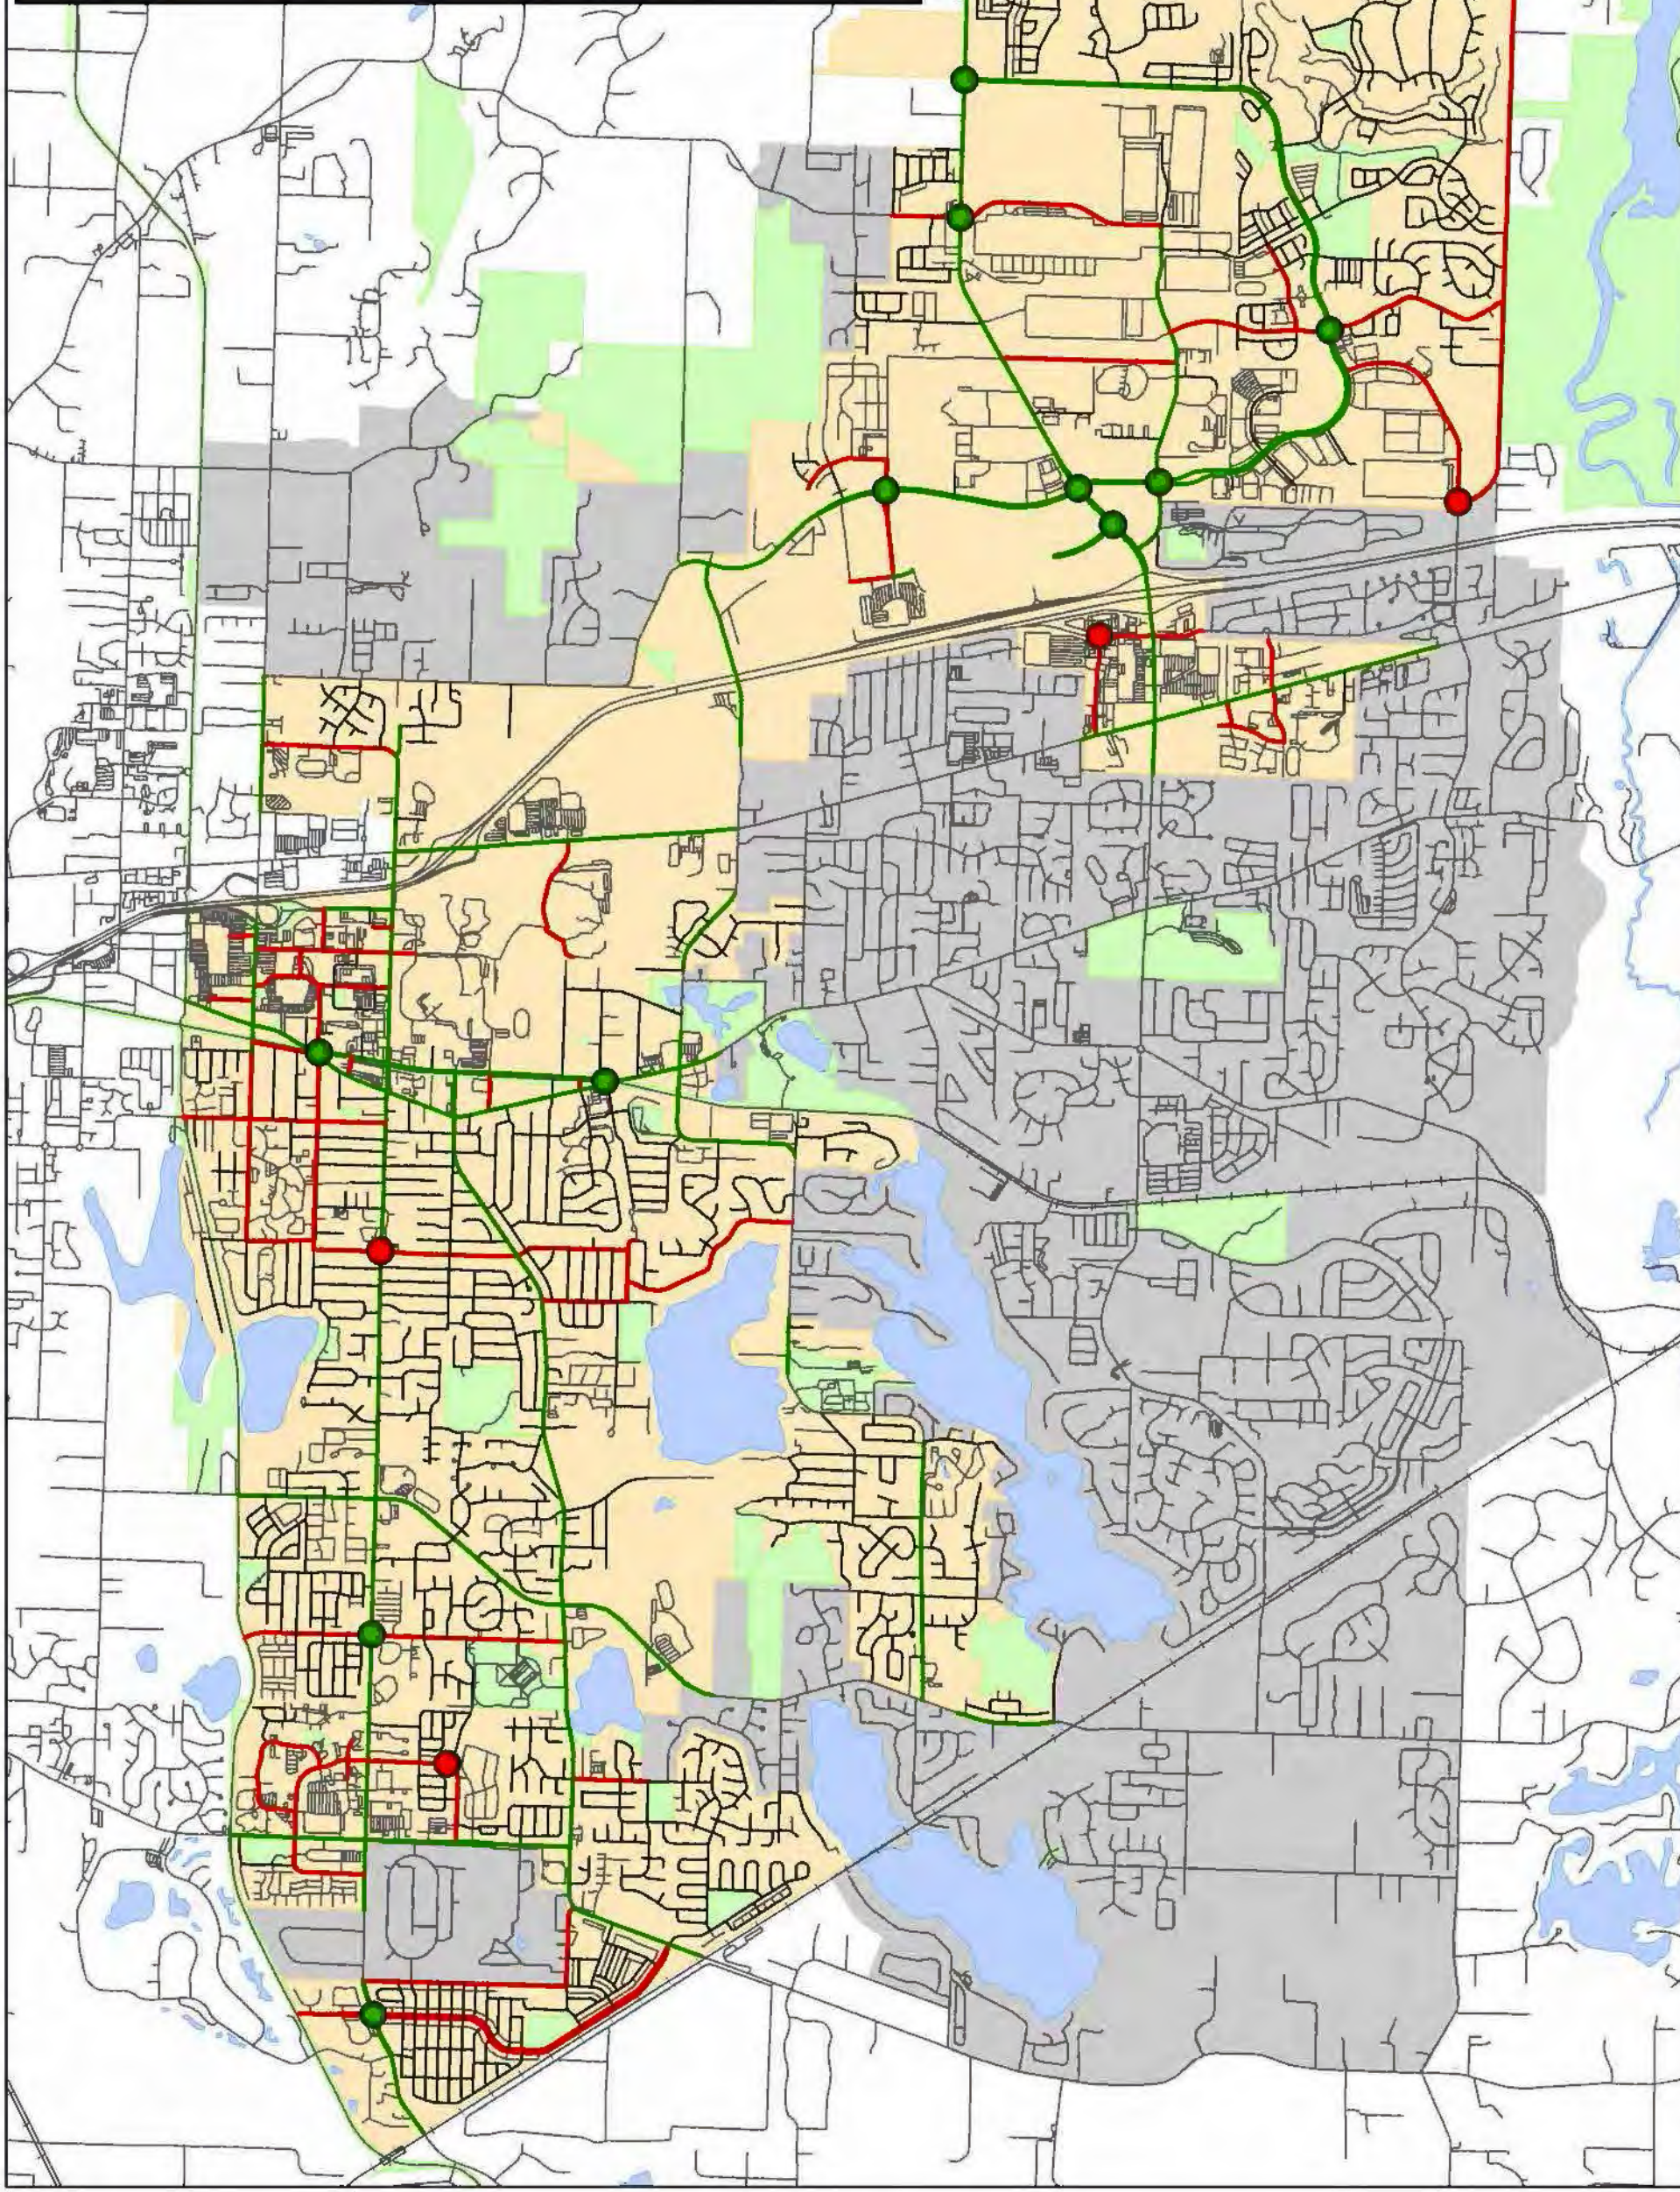

Road Maintenance History Map


- Pre 2000
 - 2000-2004
 - 2005-2009
 - 2010-2014
 - 2015-2019
 - 2020
- Parks
 - City Limits
 - UGMA



0 0.5 1
Miles

1 inch = 3,250 feet

Map Date: 10/20/2020

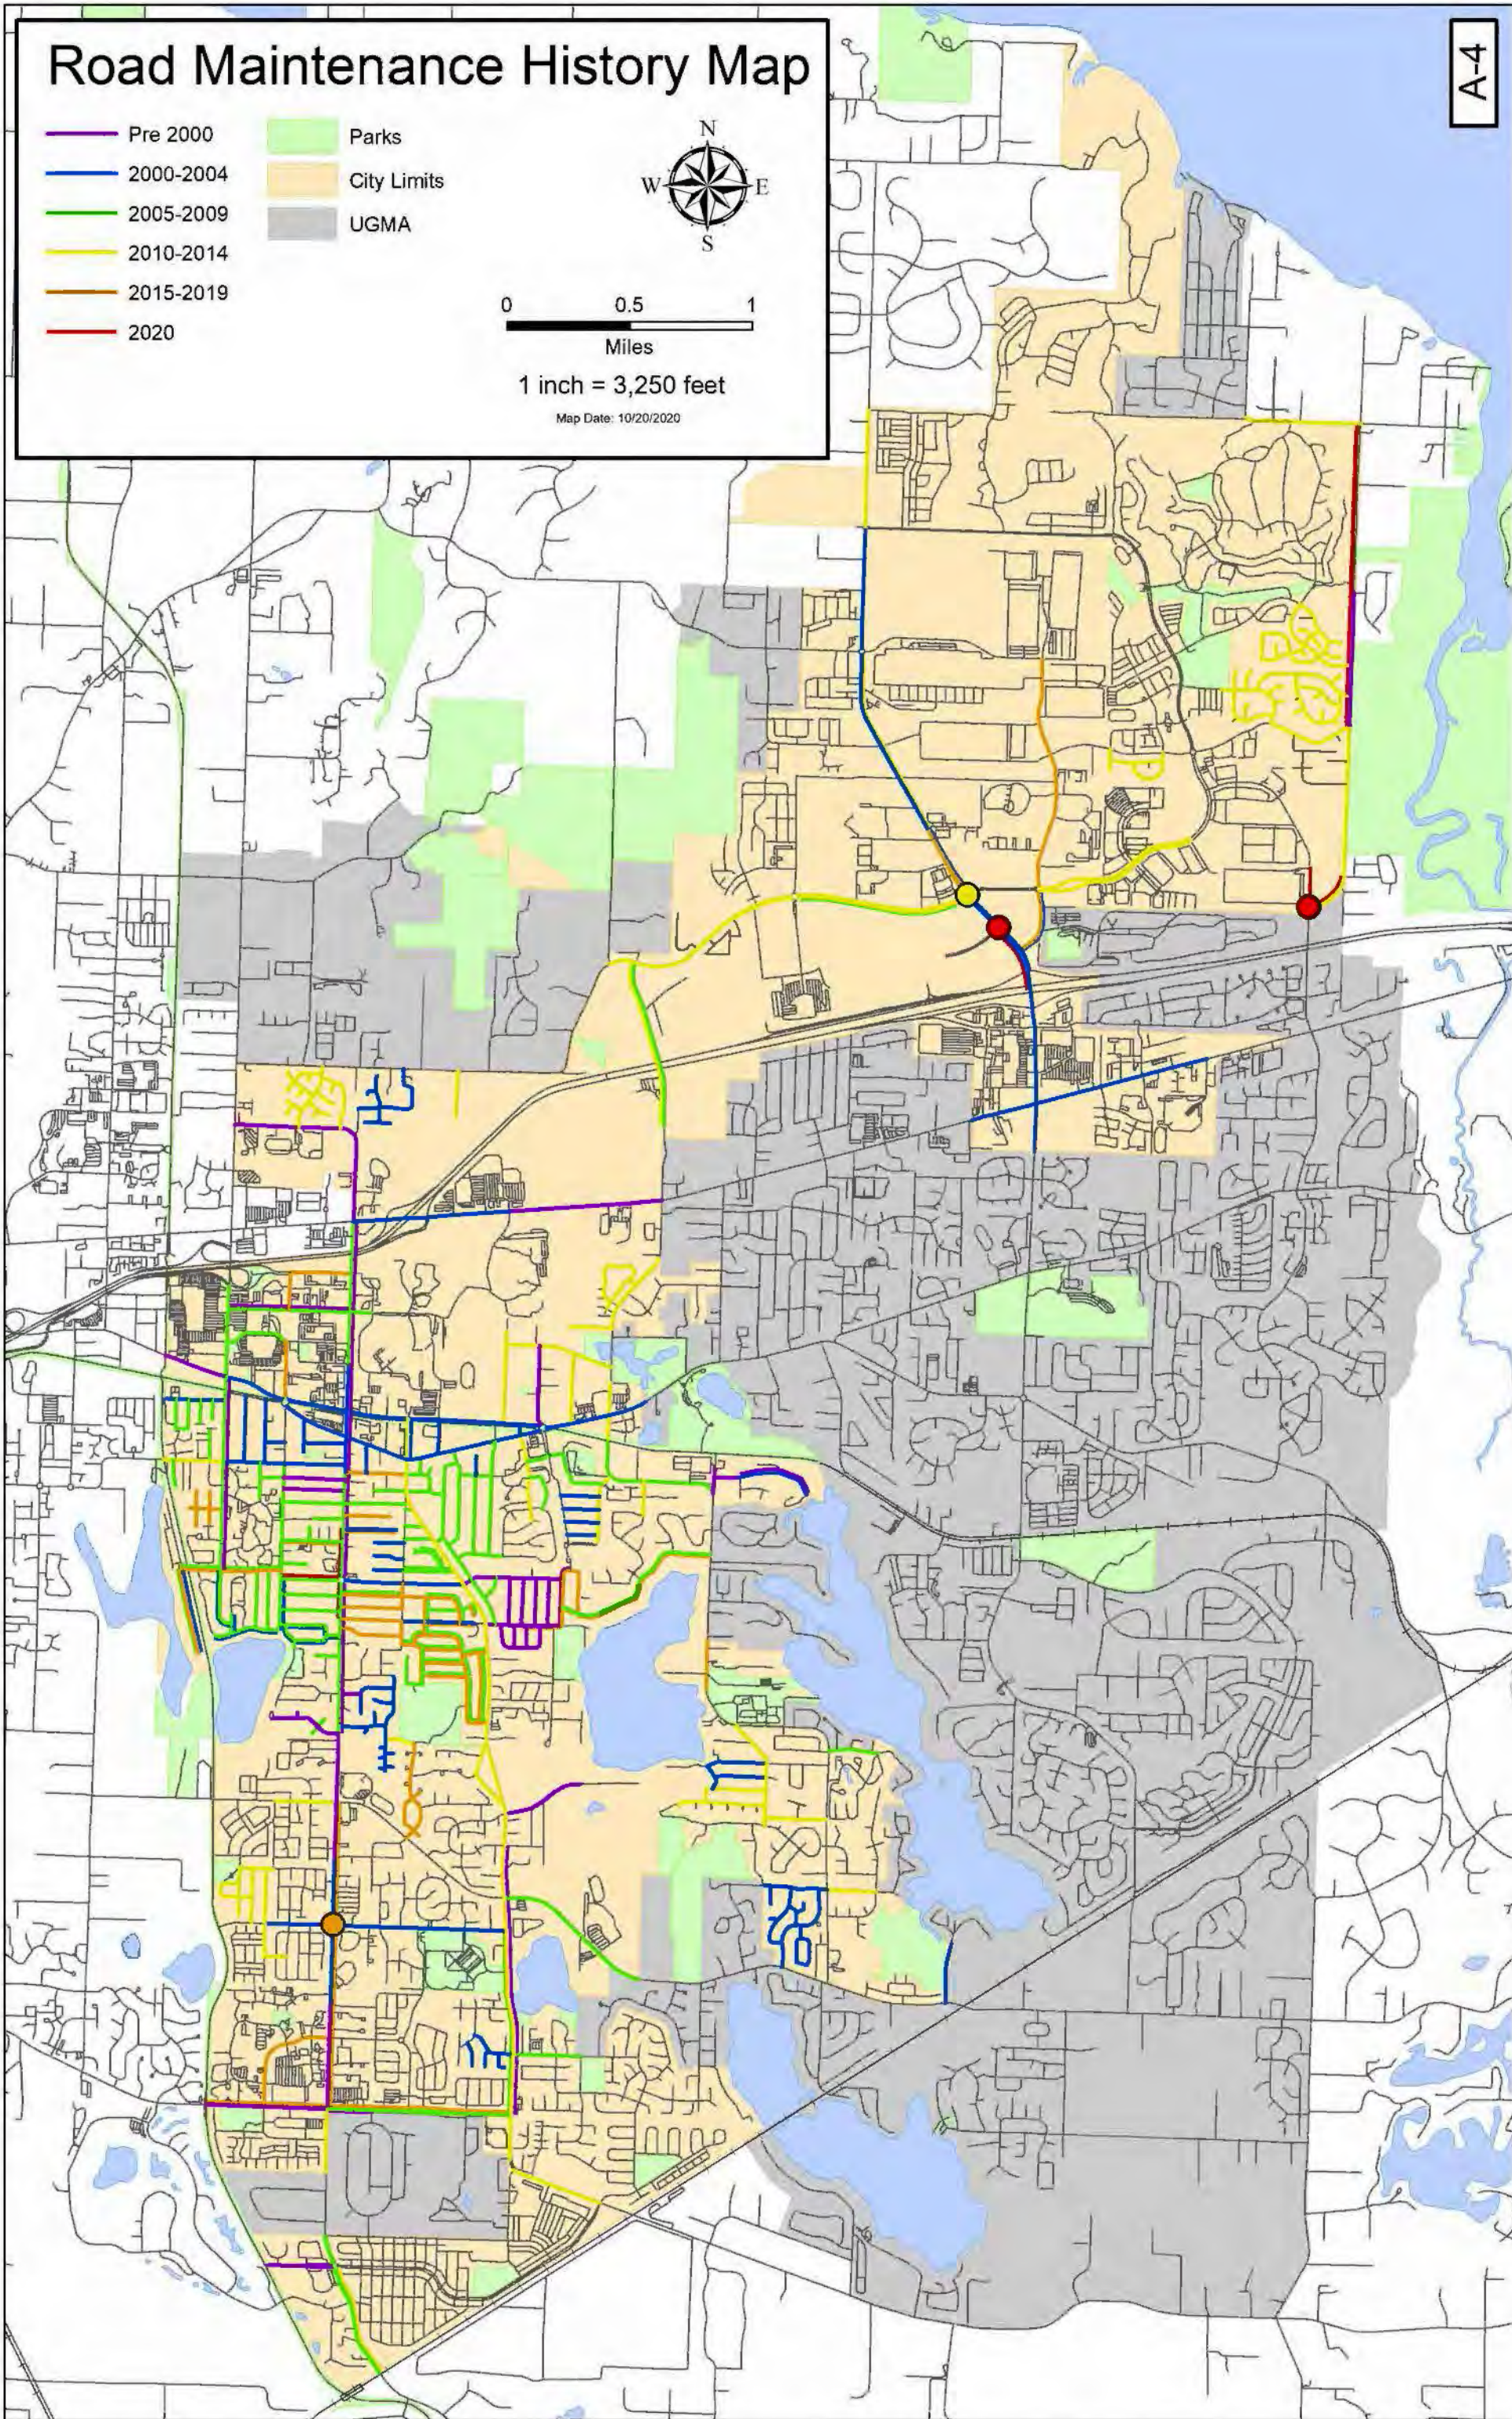

New Road History Map


- Pre-2000
 - 2000-2004
 - 2005-2009
 - 2010-2014
 - 2015-2019
 - 2020
- Parks
 - City Limits
 - UGMA



0 0.5 1
Miles

1 inch = 3,250 feet

Map Date: 10/7/2020

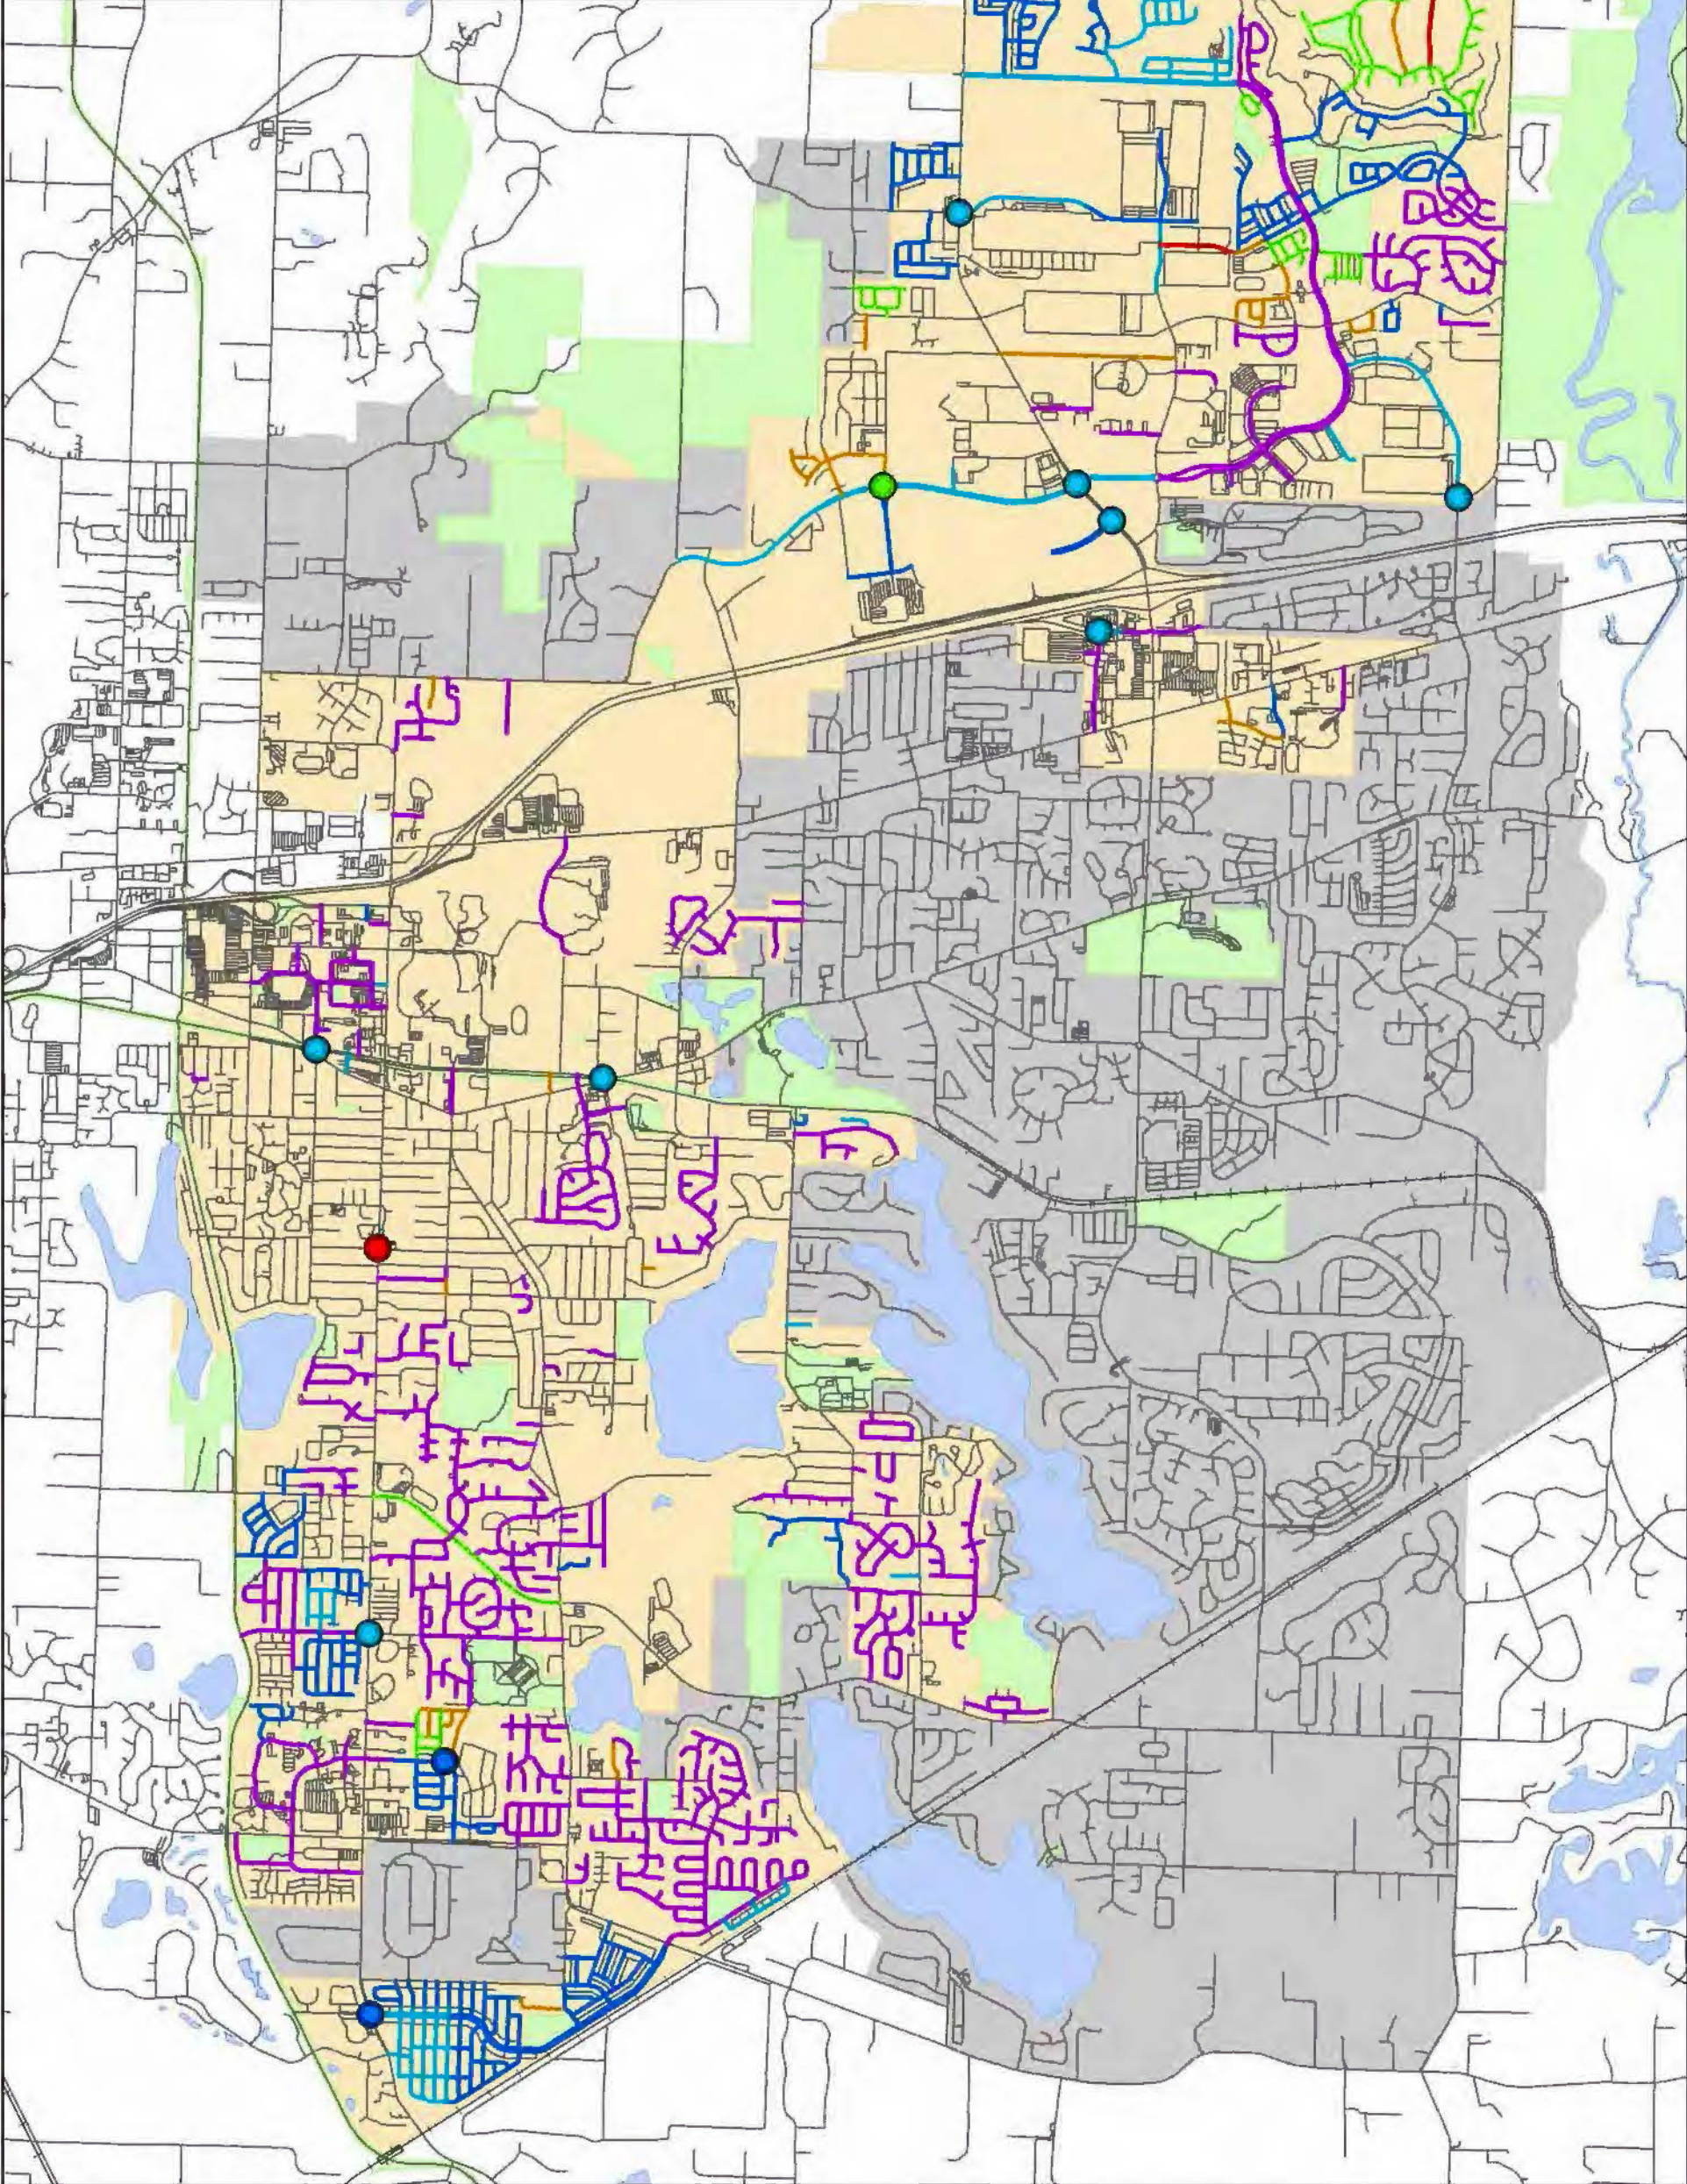

PAVEMENT CONDITION INDEX SCORES

Pavement Condition Index (PCI):
A value between 0 and 100 which is used to indicate the general condition of a pavement. This table shows PCI scores from the past five years for each road segment.

Remaining Service Life (RSL):
The estimated number of years to the time when the pavement is providing substandard service quality.

ENTIRE NETWORK (ALPHABETICAL LISTING)

32

SUMMER 2020

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
03rd Ave. SE	I-5 Corridor	College St. SE	96	97	97	97	100	Arterial	1280	29
04th Ave. SE	College St. SE	End of Road	82	80	83	85	85	Collector	380	16
05th Ct. SE	Kinwood Rd. SE	End of Road	75	78	78	79	80	Residential	540	23
05th Way SE	Carpenter Rd. SE	Glen Ct. SE	75	75	77	80	81	Residential	1150	23
05th Way SE	Glen Ct. SE	Kinwood Rd. SE	71	71	73	76	78	Residential	1260	20
06th Ave. NE	Sleater Kinney Rd. NE	Enterprise Dr. NE	60	62	60	61	61	Collector	1340	8
06th Ave. NE	Enterprise Dr. NE	College St. NE	56	59	60	61	63	Collector	1220	7
06th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	80	81	85	85	85	Collector	1280	24
06th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	83	83	85	Collector	1280	21
06th Ave. SE	Carpenter Rd. SE	End of Road	92	94	94	95	97	Residential	880	33
07th Ave. NE	End of Road	End of Road	62	63	63	64	66	Residential	570	15
07th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	67	74	76	78	81	Collector	1400	15
07th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	81	82	82	Collector	1300	14
07th Ave. SE	Bowker St. SE	Lacey St. SE	93	95	95	96	97	Residential	710	33
07th Ave. SE	Lacey St. SE	Ulery St. SE	93	95	94	96	97	Residential	760	33
07th Ave. SE	Ulery St. SE	Carpenter Rd. SE	93	95	95	96	97	Residential	840	33
08th Ave. NE	College St. NE	Livingston St. NE	82	82	82	83	84	Residential	1200	38
08th Ave. SE	Sleater Kinney Rd. SE	End of Road	18	19	20	21	23	Collector	600	0
10th Ave. SE	Golf Club Rd. SE	End of Road	86	87	87	87	87	Residential	265	30
12th Ave. SE	Sleater Kinney Rd. SE	End of Road	76	77	77	77	79	Residential	1200	23
13th Ave. SE	Willow St. SE	Golf Club Rd. SE	82	83	87	88	88	Residential	410	37
13th Ave. SE	Crowe St. SE	College St. SE	81	82	85	86	87	Residential	870	36
13th Ave. SE	Clearbrook Dr. SE	Glen Mary Dr. SE	86	86	90	91	93	Residential	840	34
13th Ct. SE	College St. SE	End of Road	33	39	40	30	31	Residential	280	3
14th Ave. NE	Galaxy Dr. NE	End of Road	73	74	75	77	78	Residential	240	24
14th Ave. SE	Western City Limits	Sleater Kinney Rd. SE	85	85	86	87	87	Collector	1300	29
14th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	82	80	83	82	82	Collector	1300	24
14th Ave. SE	Golf Club Rd. SE	College St. SE	83	86	82	81	82	Collector	1300	25
14th Ave. SE	College St. SE	Ruddell Rd. SE	99	99	100	65	67	Residential	1300	34
14th Ave. SE	Ruddell Rd. SE	15th Ave. SE	63	66	70	74	77	Residential	960	15
14th Ave. SE	Alder St. SE	Lebanon St. SE	87	87	87	87	90	Residential	700	30
14th Ave. SE	Lebanon St. SE	Clearbrook Dr. SE	82	80	80	82	84	Residential	810	27
14th Ave. SE	Carpenter Rd. SE	Nobel Firs Ct. SE	80	80	82	83	84	Residential	550	26
14th Ave. SE	Nobel Firs Ct. SE	End of Road	82	82	82	85	85	Residential	1500	27
14th Ct. SE	14th Ave. SE	End of Road	88	89	88	89	89	Residential	680	31
14th Way SE	Willow St. SE	Golf Club Rd. SE	90	91	89	92	92	Residential	490	36
14th Way SE	Golf Club Rd. SE	College St. SE	89	89	89	89	89	Residential	1280	35
15th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	85	85	85	Residential	1300	33

ENTIRE NETWORK (ALPHABETICAL LISTING)

32

SUMMER 2020

Pavement Condition Categories

PCI 85 – 100 = "Very Good"

PCI 60 – 84 = "Good"

PCI 40 – 59 = "Fair"

PCI 0 – 39 = "Poor"

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
03rd Ave. SE	I-5 Corridor	College St. SE	96	97	97	97	100	Arterial	1280	29
04th Ave. SE	College St. SE	End of Road	82	80	83	85	85	Collector	380	16
05th Ct. SE	Kinwood Rd. SE	End of Road	75	78	78	79	80	Residential	540	23
05th Way SE	Carpenter Rd. SE	Glen Ct. SE	75	75	77	80	81	Residential	1150	23
05th Way SE	Glen Ct. SE	Kinwood Rd. SE	71	71	73	76	78	Residential	1260	20
06th Ave. NE	Sleater Kinney Rd. NE	Enterprise Dr. NE	60	62	60	61	61	Collector	1340	8
06th Ave. NE	Enterprise Dr. NE	College St. NE	56	59	60	61	63	Collector	1220	7
06th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	80	81	85	85	85	Collector	1280	24
06th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	83	83	85	Collector	1280	21
06th Ave. SE	Carpenter Rd. SE	End of Road	92	94	94	95	97	Residential	880	33
07th Ave. NE	End of Road	End of Road	62	63	63	64	66	Residential	570	15
07th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	67	74	76	78	81	Collector	1400	15
07th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	81	82	82	Collector	1300	14
07th Ave. SE	Bowker St. SE	Lacey St. SE	93	95	95	96	97	Residential	710	33
07th Ave. SE	Lacey St. SE	Ulery St. SE	93	95	94	96	97	Residential	760	33
07th Ave. SE	Ulery St. SE	Carpenter Rd. SE	93	95	95	96	97	Residential	840	33
08th Ave. NE	College St. NE	Livingston St. NE	82	82	82	83	84	Residential	1200	38
08th Ave. SE	Sleater Kinney Rd. SE	End of Road	18	19	20	21	23	Collector	600	0
10th Ave. SE	Golf Club Rd. SE	End of Road	86	87	87	87	87	Residential	265	30
12th Ave. SE	Sleater Kinney Rd. SE	End of Road	76	77	77	77	79	Residential	1200	23
13th Ave. SE	Willow St. SE	Golf Club Rd. SE	82	83	87	88	88	Residential	410	37
13th Ave. SE	Crowe St. SE	College St. SE	81	82	85	86	87	Residential	870	36
13th Ave. SE	Clearbrook Dr. SE	Glen Mary Dr. SE	86	86	90	91	93	Residential	840	34
13th Ct. SE	College St. SE	End of Road	33	39	40	30	31	Residential	280	3
14th Ave. NE	Galaxy Dr. NE	End of Road	73	74	75	77	78	Residential	240	24
14th Ave. SE	Western City Limits	Sleater Kinney Rd. SE	85	85	86	87	87	Collector	1300	29
14th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	82	80	83	82	82	Collector	1300	24
14th Ave. SE	Golf Club Rd. SE	College St. SE	83	86	82	81	82	Collector	1300	25
14th Ave. SE	College St. SE	Ruddell Rd. SE	99	99	100	65	67	Residential	1300	34
14th Ave. SE	Ruddell Rd. SE	15th Ave. SE	63	66	70	74	77	Residential	960	15
14th Ave. SE	Alder St. SE	Lebanon St. SE	87	87	87	87	90	Residential	700	30
14th Ave. SE	Lebanon St. SE	Clearbrook Dr. SE	82	80	80	82	84	Residential	810	27
14th Ave. SE	Carpenter Rd. SE	Nobel Firs Ct. SE	80	80	82	83	84	Residential	550	26
14th Ave. SE	Nobel Firs Ct. SE	End of Road	82	82	82	85	85	Residential	1500	27
14th Ct. SE	14th Ave. SE	End of Road	88	89	88	89	89	Residential	680	31
14th Way SE	Willow St. SE	Golf Club Rd. SE	90	91	89	92	92	Residential	490	36
14th Way SE	Golf Club Rd. SE	College St. SE	89	89	89	89	89	Residential	1280	35
15th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	85	85	85	Residential	1300	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
15th Ave. SE	Ruddell Rd. SE	End of Road	91	91	90	91	92	Residential	640	32
15th Ave. SE	Ruddell Rd. SE	Gemini St. SE	88	90	90	91	92	Residential	800	35
15th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	84	86	87	87	Residential	810	32
15th Ave. SE	Nobel Firs Ct. SE	End of Road	85	86	84	85	85	Residential	620	29
15th Ct. SE	15th Ave. SE	End of Road	85	86	86	87	87	Residential	180	29
16th Ave. SE	Sleater Kinney Rd. SE	End of Road	99	100	100	64	66	Residential	680	34
16th Ave. SE	Golf Club Rd. SE	College St. SE	74	75	78	81	83	Residential	1270	24
16th Ave. SE	College St. SE	Judd St. SE	88	88	89	91	92	Residential	1300	35
16th Ave. SE	Sulky Dr. SE	Clearbrook Dr. SE	69	70	71	73	74	Residential	480	19
16th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	86	87	Residential	750	34
16th Ct. SE	16th Ave. SE	End of Road	74	74	75	77	78	Residential	210	22
16th Way SE	Judd St. SE	Ruddell Rd. SE	90	91	91	91	93	Residential	120	36
17th Ave. SE	College St. SE	West End of Road	88	89	89	91	91	Residential	590	35
17th Ave. SE	College St. SE	East End of Road	99	99	100	54	57	Residential	970	34
17th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	86	87	Residential	690	34
17th Ct. SE	Clearbrook Dr. SE	End of Road	65	68	69	70	72	Residential	150	17
18th Ave. SE	College St. SE	End of Road	92	93	93	65	69	Residential	1100	36
18th Ave. SE	Judd St. SE	Ruddell Rd. SE	90	91	89	92	93	Residential	370	32
18th Ave. SE	Sulky Dr. SE	17th Ct. SE	58	61	62	62	65	Residential	720	13
18th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	85	87	Residential	630	34
19th Ave. SE	Golf Club Rd. SE	College St. SE	98	100	100	59	62	Residential	1300	34
19th Ave. SE	Judd St. SE	End of Road	88	88	90	91	91	Residential	630	31
19th Ave. SE	Judd St. SE	Ruddell Rd. SE	91	91	91	92	93	Residential	570	32
19th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	67	68	67	70	72	Residential	1100	18
19th Ct. SE	19th Ave. SE	End of Road	64	66	66	67	67	Residential	370	16
20th Ave. SE	Judd St. SE	End of Road	90	90	90	91	91	Residential	630	36
20th Ave. SE	Sycamore Dr. SE	Sulky Dr. SE	59	65	69	70	72	Residential	1000	12
20th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	61	62	61	62	64	Residential	740	15
21st Ave. SE	West Lake Dr. SE	Sleater Kinney Rd. SE	77	78	89	84	86	Residential	830	27
21st Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	91	91	93	58	60	Collector	1280	29
21st Ave. SE	Judd St. SE	End of Road	87	89	87	89	89	Residential	620	34
21st Ave. SE	Judd St. SE	Ruddell Rd. SE	87	87	87	89	89	Residential	1070	44
21st Ct. SE	Golf Club Rd. SE	End of Road	65	67	69	72	73	Residential	520	16
22nd Ave. SE	Golf Club Rd. SE	College St. SE	100	87	87	88	88	Collector	1270	30
22nd Ave. SE	College St. SE	Judd St. SE	89	87	87	85	85	Collector	1280	28
22nd Ave. SE	Judd St. SE	Ruddell Rd. SE	86	86	89	89	89	Collector	1260	27
22nd Ave. SE	Ruddell Rd. SE	Larch St. SE	83	84	84	85	85	Collector	1010	25
22nd Ave. SE	Larch St. SE	Lilac St. SE	83	84	83	82	82	Collector	1130	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
22nd Ave. SE	Agate Ct. SE	Diamond Lp. SE	78	80	81	81	80	Residential	770	25
22nd Ct. SE	22nd Ave. SE	End of Road	80	80	79	80	80	Residential	290	26
23rd Ave. SE	Golf Club Rd. SE	College St. SE	77	78	84	86	88	Residential	1270	30
23rd Ave. SE	College St. SE	Judd St. SE	97	96	99	100	100	Residential	1280	34
23rd Ave. SE	Judd St. SE	Brentwood Pl. SE	97	97	99	100	100	Residential	460	34
23rd Ave. SE	Brentwood Pl. SE	25th Ave. SE	97	97	99	100	100	Residential	1150	34
24th Ave. SE	Golf Club Rd. SE	College St. SE	65	66	73	75	77	Residential	1270	16
24th Ave. SE	College St. SE	Judd St. SE	95	95	99	100	100	Residential	1280	34
24th Ave. SE	Brentwood Pl. SE	23rd Ave. SE	90	91	91	92	93	Residential	720	32
24th Ave. SE	23rd Ave. SE	Ruddell Rd. SE	86	87	89	90	91	Residential	370	30
25th Ave. SE	College St. SE	Judd St. SE	95	95	99	100	100	Residential	1280	34
25th Ave. SE	Judd St. SE	Brentwood Pl. SE	90	90	90	90	91	Residential	470	36
25th Ave. SE	Brentwood Pl. SE	25th Ct. SE	91	91	91	91	93	Residential	1090	37
25th Ave. SE	Ruddell Rd. SE	Angela St. SE	77	80	82	83	84	Collector	740	21
25th Ave. SE	Angela St. SE	Lilac St. SE	68	67	73	76	78	Collector	870	16
25th Ave. SE	Lilac St. SE	End of Road	100	34	51	54	57	Residential	480	34
25th Ct. SE	25th Ave. SE	End of Road	75	75	77	78	78	Residential	440	23
25th Lp. SE	25th Ave. SE	25th Ave. SE	100	83	83	85	87	Residential	1640	34
26th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	86	87	89	Residential	1420	42
26th Ave. SE	College St. SE	Judd St. SE	97	97	99	100	100	Residential	1300	34
26th Ave. SE	Judd St. SE	Brentwood Dr. SE	96	97	98	100	100	Residential	1270	34
26th Ct. SE	Carpenter Rd. SE	End of Road	86	86	86	87	87	Residential	450	30
26th Lp. SE	26th Ave. SE	26th Ave. SE	86	87	85	86	87	Residential	1150	33
27th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	97	97	99	100	100	Residential	850	34
27th Ave. SE	Brentwood Dr. SE	Ruddell Rd. SE	97	97	98	100	100	Residential	550	34
27th Ct. SE	College St. SE	End of Road	86	86	84	85	86	Residential	530	43
27th Ct. SE	Judd St. SE	End of Road	84	84	78	80	80	Residential	270	29
28th Ave. SE	College St. SE	Impala Dr. SE	80	80	76	77	77	Residential	1190	26
28th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	97	97	99	100	100	Residential	920	34
28th Ct. NE	Hogum Bay Rd. NE	End of Road	88	86	87	87	87	Residential	1160	31
29th Ave. NE	Marvin Rd. NE	End of Road	82	82	76	76	77	Residential	1110	27
29th Ave. SE	Lakeview Dr. SE	College St. SE	65	66	67	69	71	Residential	1220	18
29th Ct. SE	29th Ave. SE	End of Road	61	63	69	71	72	Residential	210	15
29th Ct. SE	Ruddell Rd. SE	End of Road	85	87	87	90	91	Residential	350	29
30th Ave. NE	Hogum Bay Rd. NE	End of Road	54	56	64	64	66	Residential	900	12
30th Ave. SE	Lakeview Dr. SE	29th Ave. SE	59	59	63	64	64	Residential	980	14
30th Ave. SE	Ruddell Rd. SE	End of Road	64	67	63	65	66	Residential	740	16
30th Ave. SE	Hicks Lake Rd. SE	End of Road	47	46	48	52	53	Residential	620	8

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
30th Ct. SE	Impala Dr. SE	End of Road	82	83	82	83	85	Residential	450	37
31st Ave. NE	Hogum Bay Rd. NE	Hanna Ct. NE	33	34	39	41	42	Collector	1320	1
31st Ave. NE	Hanna Ct. NE	Williamette Dr. NE	82	84	83	83	84	Collector	1740	16
31st Ave. NE	Williamette Dr. NE	Deni Dr. NE	77	79	85	85	86	Collector	1770	14
31st Ave. NE	Deni Dr. NE	Meridian Rd. NE	86	87	91	93	94	Collector	1820	19
31st Ave. NE	Marvin Rd. NE	Hogum Bay Rd. NE	100	100				Collector	3300	24
31st Ave. SE	College St. SE	Impala Dr. SE	80	81	85	85	83	Residential	990	34
31st Ct. SE	31st Ave. SE	End of Road	81	83	84	85	85	Residential	170	36
32nd Ave. NE	Bonanza Dr. NE	East End of Eagle Ct. Plat	80	81	87	89	89	Residential	965	26
32nd Ave. NE	Marvin Rd. NE	East End of Eagle Ct. Plat	77	77	81	82	82	Residential	1430	24
32nd Ave. SE	Impala Dr. SE	Stikes Dr. SE	93	91	91	92	93	Residential	290	37
32nd Ave. SE	Carpenter Rd. SE	Long Lake Dr. SE	86	86	86	89	89	Residential	1000	30
32nd Ct. SE	Impala Dr. SE	End of Road	83	84	86	87	88	Residential	130	39
32nd Ct. SE	Ruddell Rd. SE	West End of Road	62	64	63	65	65	Residential	450	15
32nd Ct. SE	Ruddell Rd. SE	East End of Road	73	73	74	76	77	Residential	600	22
33rd Ave. NE	Bali St. NE	Mia St. NE	87	88	91	92	92	Residential	975	30
33rd Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	85	85	85	87	89	Residential	1280	33
33rd Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	70	73	71	72	72	Residential	1300	20
33rd Ct. SE	Impala Dr. SE	West End of Road	83	84	84	85	85	Residential	130	39
33rd Ct. SE	Impala Dr. SE	East End of Road	78	78	86	87	89	Residential	180	32
33rd Ct. SE	Stikes Dr. SE	West End of Road	100	100	71	71	73	Residential	320	34
33rd Ct. SE	Stikes Dr. SE	East End of Road	100	100	64	64	66	Residential	310	34
33rd Ct. SE	Ruddell Lp. SE	End of Road	83	83	84	86	86	Residential	1300	28
33rd Lp. SE	33rd Ave. SE	33rd Ave. SE	62	65	65	66	67	Residential	1200	15
33rd Way NE	Bali St. NE	Marvin Rd. NE	89	91	91	92	92	Residential	1175	31
34th Ave. NE	Bali St. NE	Kona St. NE	89	91	92	93	93	Residential	600	31
34th Ave. SE	Stikes Dr. SE	Ruddell Lp. SE	70	70	71	71	73	Residential	1500	20
34th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	73	83	84	85	87	Residential	1080	26
34th Ave. SE	Stanfield Rd. SE	East End of Road	88	88	88	88	88	Residential	230	31
34th Ct. SE	Impala Dr. SE	West End of Road	85	86	82	83	85	Residential	130	33
34th Ct. SE	Impala Dr. SE	East End of Road	85	86	84	85	85	Residential	180	33
35th Ave. SE	"Lakeview Estates" HOA	35th Ct. SE	70	69	69	71	73	Residential	780	22
35th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	89	91	92	93	94	Residential	1150	42
35th Ave. SE	Meadow Lake St. SE	"Lakeview Estates" HOA	93	93	93	95	95	Residential	330	33
35th Ct. SE	35th Ave. SE	End of Road	57	59	62	64	66	Residential	270	13
36th Ave. SE	Ida Jane Way SE	End of Road	91	91	92	93	95	Residential	600	37
36th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	91	91	92	93	95	Residential	1280	37
36th Ct. SE	Lakecrest Dr. SE	West End of Road	45	47	55	58	59	Residential	160	7

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
36th Ct. SE	Lakecrest Dr. SE	East End of Road	62	62	60	60	61	Residential	210	16
36th Ct. SE	Banbury Pl. SE	End of Road	87	87	86	87	87	Residential	430	30
37th Ave. SE	Western City Limits	Ingleside Dr. SE	77	78	75	75	75	Arterial	1280	18
37th Ave. SE	Ingleside Dr. SE	College St. SE	83	83	85	86	86	Arterial	1300	21
37th Ave. SE	Stikes Dr. SE	End of Road	85	77	78	81	81	Residential	1570	29
37th Ave. SE	Ruddell Rd. SE	Apollo St. SE	74	75	75	77	77	Residential	870	29
37th Ave. SE	Apollo St. SE	End of Road	82	82	86	88	89	Residential	900	31
37th Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	92	92	93	93	94	Residential	1300	33
37th Ct. SE	Ruddell Rd. SE	End of Road	56	58	59	62	65	Residential	270	12
37th Ct. SE	Arbor Dr. SE	End of Road	73	76	79	80	80	Residential	160	22
38th Ave. SE	Stanfield Rd. SE	End of Road	92	93	93	93	95	Residential	1570	33
38th Ct. SE	Ruddell Rd. SE	End of Road	54	56	64	66	67	Residential	290	11
38th Ct. SE	Arbor Dr. SE	West End of Road	74	78	78	79	79	Residential	180	22
38th Ct. SE	Arbor Dr. SE	East End of Road	80	80	80	81	81	Residential	210	26
38th Dr. SE	Stanfield Rd. SE	38th Lp. SE	76	78	77	78	78	Residential	620	23
38th Dr. SE	38th Lp. SE	Carpenter Rd. SE	74	74	74	74	77	Residential	1000	22
38th Dr. SE	Carpenter Rd. SE	39th Ave. SE	80	80	80	81	81	Residential	870	26
38th Lp. SE	38th Dr. SE	38th Dr. SE	74	76	75	76	77	Residential	1090	22
38th Way NE	Marvin Rd. NE	End of Road	89	91	92	92	92	Residential	520	31
39th Ave. SE	College St. SE	Stikes Dr. SE	79	77	77	71	72	Residential	770	25
39th Ave. SE	Stikes Dr. SE	Stikes Dr. SE	77	77	77	73	74	Residential	940	24
39th Ave. SE	Mullen Rd. SE	Koala St. SE	80	79	80	81	79	Residential	520	26
39th Ave. SE	39th Ave. SE	Ruddell Rd. SE	80	80	80	81	76	Residential	1200	26
39th Ave. SE	Ruddell Rd. SE	Apollo St. SE	73	77	78	72	75	Residential	810	22
39th Ave. SE	Arbor Dr. SE	End of Road	81	83	83	84	84	Residential	890	27
39th Ct. SE	39th Ave. SE	End of Road	79	79	81	77	77	Residential	130	25
39th Ct. SE	Arbor Dr. SE	End of Road	80	80	82	83	83	Residential	120	26
39th Ct. SE	Carpenter Rd. SE	End of Road	86	87	87	87	87	Residential	570	30
40th Ct. SE	Ruddell Rd. SE	End of Road	79	79	79	79	82	Residential	500	25
41st Ave. NE	Whidbey Rd. NE	Meriwood Dr. NE	83	88	89	89	90	Arterial	1340	21
41st Ave. NE	Vashon Dr. NE	Whidbey Rd. NE	83	85	89	89	90	Arterial	1020	21
41st Ave. NE	Edgewater Blvd. NE	Vashon Dr. NE	81	85	88	90	91	Arterial	2170	20
41st Ave. NE	Marvin Rd. NE	Edgewater Blvd. NE	81	83	83	87	89	Arterial	770	20
41st Ave. SE	Stikes Dr. SE	Quail Dr. SE	84	84	84	85	85	Residential	690	29
41st Ave. SE	City Limits	Carpenter Rd. SE	85	87	87	88	89	Residential	1380	33
41st Ave. SE	Carpenter Rd. SE	Arbor Dr. SE	88	89	91	93	95	Residential	1030	39
41st Ave. SE	Galena St. SE	College St. SE	89	89	89	90	91	Residential	180	31
43rd Ave. SE	Quail Dr. SE	Park Place Lp. SE	88	88	89	89	90	Residential	240	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
43rd Ave. SE	Carpenter Rd. SE	Juniper Ct. SE	75	75	77	79	79	Residential	850	23
43rd Ct. SE	Park Place Lp. SE	End of Road	84	85	85	87	87	Residential	490	29
44th Ct. SE	Greenbriar St. SE	West End of Road	83	83	83	83	83	Residential	670	28
44th Ct. SE	Greenbriar St. SE	East End of Road	87	86	88	88	88	Residential	450	30
45th Ave. SE	Western City Limits	Seville Dr. SE	86	86	85	87	87	Collector	970	18
45th Ave. SE	Seville Dr. SE	College St. SE	82	83	82	82	83	Collector	1360	17
45th Ave. SE	College St. SE	Stikes Dr. SE	83	84	86	86	87	Collector	920	25
45th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	83	84	84	86	87	Collector	820	25
45th Ave. SE	Parkside Dr. SE	Greenbriar St. SE	82	82	83	85	87	Collector	1010	24
45th Ave. SE	Greenbriar St. SE	Ruddell Rd. SE	81	83	84	86	87	Collector	860	24
45th Ave. SE	Carpenter Rd. SE	End of Road	52	54	60	63	66	Residential	220	10
46th Ave. NE	Hilton Rd. NE	Meridian Rd. NE	86	86	87	87	88	Residential	2370	36
46th Ave. SE	Timothy St. SE	Colleen Ct. SE	92	92	92	94	95	Residential	300	33
47th Ave. SE	Seville Dr. SE	Stonegate St. SE	88	90	88	91	91	Residential	480	31
47th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	84	84	85	85	Residential	780	29
47th Ave. SE	Rochelle St. SE	Colleen Ct. SE	92	92	93	95	95	Residential	525	33
48th Ave. SE	Rosemont Ct. SE	Crosswaters St. SE	88	87	86	87	87	Residential	790	31
48th Ave. SE	Crosswaters St. SE	End of Road	88	87	87	87	87	Residential	810	31
48th Lp. SE	48th Ave. SE	48th Ave. SE	88	87	87	88	88	Residential	990	31
49th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	99	100	100	100		Residential	930	34
50th Ave. SE	College St. SE	Boardwalk St. SE	86	86	86	87	87	Residential	860	30
50th Ave. SE	Ruddell Rd. SE	End of Road	75	77	81	75	76	Residential	1220	23
50th Ct. SE	50th Ave. SE	End of Road	82	82	82	83	83	Residential	540	27
51st Way SE	Boardwalk St. SE	Andrew St. SE	98	96	96	97	98	Residential	420	34
52nd Way SE	Boardwalk St. SE	Andrew St. SE	98	96	96	97	98	Residential	415	34
53rd Ave. SE	College St. SE	Boardwalk St. SE	86	87	87	89	89	Collector	980	18
53rd Ave. SE	Lakehills St. SE	End of Road	78	78	80	81	83	Residential	190	25
53rd Ave. SE	Boardwalk St. SE	Parkside Dr. SE	89	89	89	89	89	Collector	455	20
54th Ave. SE	Mt. Tahoma Dr. SE	Ruddell Rd. SE	90	88	89	87	89	Residential	1420	36
54th Ave. SE	Ruddell Rd. SE	Thornbury Dr. SE	84	86	86	87	86	Collector	980	20
54th Ave. SE	Thornbury Dr. SE	Stockton St. SE	77	79	79	80	80	Residential	1220	24
54th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	83	84	84	86	86	Residential	470	33
54th Ct. SE	Emerald St. SE	End of Road	84	74	74	75	76	Residential	310	29
54th Way SE	Topaz St. SE	Emerald St. SE	77	66	68	68	70	Residential	730	24
55th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	87	88	88	89	89	Residential	510	30
55th Ct. SE	Emerald St. SE	End of Road	78	73	73	74	75	Residential	260	25
55th Way SE	Topaz St. SE	Emerald St. SE	79	74	74	76	77	Residential	740	25
56th Ave. NE	Waldon Dr. NE	Western City Limits	100	100				Residential	430	34

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
56th Ave. SE	Mt. Baker St. SE	Ruddell Rd. SE	83	85	85	85	87	Residential	1140	28
56th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	85	86	86	86	88	Residential	735	36
56th Lp. SE	56th Ave. SE	56th Ave. SE	85	86	86	87	87	Residential	800	36
57th Ave. SE	Mt. Baker St. SE	Mt. Adams St. SE	83	85	85	85	87	Residential	1090	28
57th Ave. SE	Emerald St. SE	Thornbury Dr. SE	82	82	81	83	83	Residential	470	27
57th Ave. SE	Thornbury Dr. SE	Stockton St. SE	83	83	83	81	83	Residential	1280	28
57th Ave. SE	Stockton St. SE	Vincent Ct. SE	79	81	81	84	85	Residential	810	25
57th Ave. SE	Vincent Ct. SE	Rumac St. SE	83	83	85	87	88	Residential	530	28
57th Ct. SE	Stockton St. SE	End of Road	81	85	85	87	88	Residential	370	27
57th Ct. SE	Rumac St. SE	End of Road	83	83	85	87	87	Residential	400	28
57th Lp. SE	57th Way SE	57th Way SE	87	87	88	89	89	Residential	545	30
57th Way SE	Parkside Dr. SE	Mt. Baker St. SE	83	84	84	85	85	Residential	1030	28
58th Ave. SE	Opal Ct. SE	Thornbury Dr. SE	77	77	79	80	82	Residential	1060	24
58th Ave. SE	57th Ave. SE	Stockton St. SE	80	82	82	84	85	Residential	1180	26
58th Ct. SE	57th Ave. SE	End of Road	83	85	85	87	88	Residential	460	28
59th Lp. SE	Stockton St. SE	Stockton St. SE	80	81	80	80	82	Residential	1270	26
60th Ave. SE	Stockton St. SE	Compton Blvd. SE	84	84	82	84	84	Residential	1090	29
60th Ct. SE	Thornbury Dr. SE	End of Road	82	82	83	84	84	Residential	420	27
60th Lp. SE	Stockton St. SE	Stockton St. SE	82	81	82	82	84	Residential	1270	27
61st Ave. SE	Thornbury Pl. SE	61st Lp. SE	84	85	84	86	86	Residential	1140	29
61st Ave. SE	61st Lp. SE	Stockton St. SE	82	82	84	86	86	Residential	560	27
61st Lp. SE	61st Ave. SE	Stockton St. SE	84	84	84	86	86	Residential	740	29
66th Ave. SE	Rainier Rd. SE	Sarazen St. SE	80	81	81	83	83	Collector	910	16
66th Ave. SE	Ruddell Rd. SE	Balustrade Blvd. SE	84	85	86	87	86	Residential	1200	35
66th Ave. SE	Sarazen St. SE	5319 66th Ave. SE	82	83	84	84	85	Collector	1840	17
66th Ave. SE	5319 66th Ave. SE	Ruddell Rd. SE	72	71	76	71	72	Collector	1150	12
66th Way SE	Bailey St. SE	End of Road	83	84	84	85	85	Residential	650	34
67th Ave. SE	Western City Limits	Rainier Rd. SE	75	76	76	77	79	Collector	1210	13
70th Ave. SE	Radius Lp. SE	Bailey St. SE	87	87	88	88	89	Residential	1150	30
70th Way SE	Rainier Rd. SE	Radius Lp. SE	82	85	85	85	85	Residential	450	33
70th Way SE	Bailey St. SE	Radius Lp. SE	87	87	88	88	89	Residential	790	30
71st Ave. SE	Compass St. SE	Bailey St. SE	85	85	86	88	88	Residential	1370	29
Abbey Way SE	College St. SE	Baran Dr. SE	88	88	88	88	88	Collector	460	19
Abigail Ct. NE	Campus Park Dr. NE	End of Road	91	93	95	96	97	Residential	335	32
Abigail Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	92	92	95	96	97	Residential	1100	33
Adonis Ave. NE	Hercules Dr. NE	Juno St. NE	95	96	96	98	100	Residential	440	34
Adonis Ct. NE	Juno St. NE	End of Road	95	96	96	97	100	Residential	470	34
Afflerbaugh Dr. SE	Mullen Rd. SE	City Limits	78	80	79	81	82	Residential	1020	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Agate Ct. SE	22nd Ave. SE	End of Road	77	80	80	80	78	Residential	240	24
Alabaster St. SE	Sandstone St. SE	Kapalea Way SE	89	89	90	90	91	Residential	450	31
Alanna Dr. SE	Lacey Elementary School	Carpenter Rd. SE	86	92	93	94	94	Residential	1380	37
Aldea Ct. SE	5th Way SE	End of Road	79	81	82	82	82	Residential	580	25
Alder St. SE	Sycamore Dr. SE	14th Ave. SE	86	86	88	89	91	Residential	1610	44
Alder St. SE	14th Ave. SE	Lacey Blvd. SE	86	86	86	87	89	Residential	520	44
Alexander Dr. NE	Mercedes Dr. NE	Mercedes Dr. NE	78	79	81	83	85	Residential	1040	25
Alhadeff St. SE	Pacific Ave. SE	End of public street (sign)	82	83	83	85	85	Residential	400	27
Alpha St. SE	Chambers Lake Dr. SE	21st Ave. SE	84	84	85	85	88	Residential	1250	40
Amelia Ct. NE	End of Road	End of Road	92	93	95	95	95	Residential	950	33
Anderson Ct. NE	Meriwood Dr. NE	End of Road	90	91	95	97	98	Residential	1550	42
Andress St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	92	93	92	92	Residential	500	32
Andrew St. SE	52nd Way SE	49th Ave. SE	98	97	98	99	98	Residential	720	34
Angela St. SE	25th Lp. SE	25th Ave. SE	83	83	79	80	82	Residential	460	32
Angela St. SE	25th Ave. SE	22nd Ave. SE	87	86	86	87	87	Residential	990	34
Apollo St. SE	39th Ave. SE	End of Road	74	77	83	76	77	Residential	430	22
Apollo St. SE	39th Ave. SE	37th Ave. SE	76	80	76	73	75	Residential	980	23
Arbor Ct. SE	43rd Ave. SE	End of Road	58	65	67	70	73	Residential	200	13
Arbor Dr. SE	Juniper Ct. SE	41st Ave. SE	58	62	63	66	66	Residential	560	14
Arbor Dr. SE	41st Ave. SE	39th Ct. SE	67	74	73	75	76	Residential	670	20
Arbor Dr. SE	39th Ct. SE	37th Ct. SE	86	84	82	83	84	Residential	720	30
Arbor Dr. SE	37th Ct. SE	End of Road	80	78	78	79	80	Residential	890	26
Arcarro Ct. SE	Ruddell Rd. SE	End of Road	85	86	87	89	89	Residential	874	29
Astaire St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	93	93	93	Residential	470	32
Atlas Ave. NE	Hercules Dr. NE	Willamette Dr. NE	95	95	96	98	100	Residential	690	34
Aurora St. NE	Deni Dr. NE	End of Road	93	93	95	97	99	Residential	560	33
Avonlea Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	88	88	89	Residential	1140	31
Axis St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	84	87	88	88	Residential	1600	29
Axis St. SE	Balustrade Blvd. SE	66th Ave. SE	85	86	87	89	90	Residential	660	29
Bacall St. NE	Spencer Ave. NE	38th Way NE	91	91	93	91	92	Residential	625	32
Bailey St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	85	88	88	89	Residential	1380	29
Bailey St. SE	Balustrade Blvd. SE	66th Ave. SE	85	86	89	89	89	Residential	810	29
Bainbridge Ct. NE	Bainbridge Lp. NE	End of Road	85	86	86	86	87	Residential	650	29
Bainbridge Lp. NE	Jubilee Rd. NE	Jubilee Rd. NE	85	85	84	88	89	Residential	730	29
Bainbridge Lp. NE	Jubilee Rd. NE	Whidbey Rd. NE	87	87	88	88	87	Residential	880	30
Bainbridge Lp. NE	Whidbey Rd. NE	Whidbey Rd. NE	89	89	88	88	89	Residential	1160	31
Bainbridge Lp. NE	Whidbey Rd. NE	Jubilee Rd. NE	89	89	88	88	89	Residential	830	31
Balata Ct. NE	Campus Dr. NE	End of Road	93	92	95	96	98	Residential	260	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Baldwin St. SE	Compton Blvd. SE	Steamer Dr. SE	85	87	87	88	89	Residential	210	29
Bali St. NE	33rd Ave. NE	34th Ave. NE	91	91	92	93	93	Residential	575	32
Balustrade Blvd. SE	Rainier Rd. SE	Radius Lp. SE	82	85	83	85	85	Collector	720	19
Balustrade Blvd. SE	Radius Lp. SE	Radius Lp. SE	78	78	85	87	87	Collector	2320	16
Balustrade Blvd. SE	Radius Lp. SE	66th Ave. SE	84	83	85	86	88	Collector	2030	18
Balustrade Blvd. SE	66th Ave. SE	Yelm Hwy. SE	78	83	87	88	88	Collector	1660	16
Banbury Pl. SE	37th Ave. SE	36th Ct. SE	87	87	86	87	88	Residential	290	30
Barklay Rd. NE	Vancouver Dr. NE	Lewis Dr. NE	90	91	90	91	92	Residential	560	32
Beam St. SE	Radius Lp. SE	70th Way SE	88	88	88	89	89	Residential	280	31
Becket St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	89	90	91	91	Residential	570	31
Beemer Ct. NE	Classic Dr. NE	End of Road	80	80	80	80	81	Residential	280	26
Belair Dr. SE	College St. SE	Catalina Dr. SE	86	87	87	89	82	Residential	430	30
Belair Dr. SE	Catalina Dr. SE	Impala Dr. SE	86	87	87	89	83	Residential	770	34
Beltway Lp. SE	60th Ave. SE	60th Ave. SE	80	84	84	86	88	Residential	1260	26
Bend Ct. NE	Spokane St. NE	End of Road	89	89	89	89	90	Residential	275	31
Bend Dr. NE	Spokane St. NE	Spokane St. NE	88	87	88	89	89	Residential	1240	31
Bentley Ct. NE	Mercedes Dr. NE	End of Road	74	74	79	79	81	Residential	130	22
Beta St. SE	Chambers Lake Dr. SE	21st Ave. SE	83	84	86	87	89	Residential	1190	38
Beth Ct. NE	Deni Dr. NE	End of Road	85	86	86	89	91	Residential	420	29
Birdseye Ave. NE	Gateway Blvd. NE	Fiddleback St. NE	95	95	94	93	100	Collector	1110	23
Birdseye Ave. NE	Fiddleback St. NE	End of Road	95	95	96	98	100	Collector	625	23
Blackberry Ct. SE	47th Ave. SE	End of Road	87	89	89	89	91	Residential	460	30
Blade St. SE	Balustrade Blvd. SE	66th Ave. SE	88	88	89	89	89	Residential	680	31
Blakley Lp. NE	Vashon Dr. NE	Vashon Dr. NE	90	91	92	92	93	Residential	460	32
Blue Finch Ct. SE	39th Ave. SE	End of Road	81	81	81	78	78	Residential	200	27
Blue Jay Ct. SE	Gold Finch Dr. SE	End of Road	74	75	74	75	77	Residential	300	22
Blueberry Ct. SE	47th Ave. SE	South End of Road	89	89	89	90	91	Residential	250	31
Blueberry Ct. SE	47th Ave. SE	North End of Road	89	89	89	90	91	Residential	330	31
Boardwalk St. SE	56th Ave. SE	53rd Ave. SE	85	86	86	86	86	Residential	660	36
Boardwalk St. SE	53rd Ave. SE	49th Ave. SE	96	96	96	98	98	Residential	875	34
Bogey Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	95	95	98	100	100	Residential	1420	34
Boone St. SE	14th Ave. SE	End of Road	85	85	85	87	89	Residential	650	36
Boone St. SE	12th Ave. SE	End of Road	70	77	80	83	85	Residential	380	19
Borealis Ct. NE	Williamette Dr. NE	End of Road	88	87	83	84	86	Residential	1020	31
Bowker St. SE	Pacific Ave. SE	7th Ave. SE	86	87	89	91	94	Residential	1810	34
Breeze Dr. SE	Balustrade Blvd. SE	66th Way SE	88	88	88	89	89	Residential	1000	31
Brentwood Dr. SE	Ruddell Rd. SE	Wonderwood Park Entrance	94	97	98	100	100	Residential	750	34
Brentwood Dr. SE	Wonderwood Park Entrance	28th Ave. SE	96	97	98	100	100	Residential	620	34

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Brentwood Dr. SE	28th Ave. SE	26th Ave. SE	96	97	98	100	100	Residential	610	34
Brentwood Dr. SE	26th Ave. SE	26th Ave. SE	96	97	98	100	100	Residential	1320	34
Brentwood Pl. SE	Brentwood Dr. SE	23rd Ave. SE	96	97	98	100	100	Residential	790	34
Bretherton Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	87	89	90	Residential	340	31
Bristonwood Dr. NE	Campus Highlands Dr. NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	670	33
Britton Pkwy. NE	Carpenter Rd. NE	Gateway Blvd. NE	83	80	85	86	87	Arterial	4325	21
Britton Pkwy. NE	Gateway Blvd. NE	Marvin Rd. NE	87	87	87	87	90	Arterial	3600	26
Brunswick St. SE	16th Ave. SE	South End of Road	99	100	100	77	79	Residential	300	34
Brunswick St. SE	16th Ave. SE	North End of Road	99	100	100	84	85	Residential	340	34
Budd Ct. NE	Stevens Dr. NE	End of Road	90	91	90	91	92	Residential	280	32
Burlwood St. NE	Birdseye Ave. NE	End of Road	95	96	96	98	100	Residential	680	34
Burton Ray St. NE	15th Ave. NE	End of Road	96	97	98	100	100	Residential	570	34
Caddyshack Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	100					Residential	1870	34
Callison Rd. NE	Britton Pkwy. NE	End of Road	88	88	88	89	89	Residential	685	31
Camano Ct. NE	Camano Lp. NE	End of Road	83	83	87	87	87	Residential	370	34
Camano Lp. NE	Camano Lp. NE	Camano Lp. NE	89	90	91	91	92	Residential	2330	31
Camano Lp. NE	Vashon Dr. NE	Camano Lp. NE	89	90	91	91	92	Residential	940	31
Camaro Ct. SE	31st Ave. SE	End of Road	83	85	84	85	86	Residential	260	39
Cameron Dr. NE	Campus Highlands Dr. NE	Windham Ct. NE	87	87	87	89	89	Residential	840	30
Cameron Dr. NE	Windham Ct. NE	Merrill Ct. NE	87	87	87	89	89	Residential	1450	30
Cameron Dr. NE	Merrill Ct. NE	Amelia Ct. NE	89	89	89	90	90	Residential	470	31
Campus Dr. NE	Campus Park Dr. NE	Deuce Ct. NE	93	93	95	96	98	Residential	1410	33
Campus Dr. NE	Deuce Ct. NE	Campus Highlands Dr. NE	93	93	95	96	98	Residential	1200	33
Campus Glen Dr. NE	Preston St. NE	Willamette Dr. NE	89	89	89	89	89	Residential	880	31
Campus Glen Dr. NE	Willamette Dr. NE	Lupine St. NE	84	84	86	86	87	Residential	1580	34
Campus Glen Dr. NE	Lupine St. NE	Campus Park Dr. NE	86	86	86	86	87	Residential	1530	38
Campus Glen Dr. NE	Preston St. NE	End of Campus Glen Develop	96	97	98	100	100	Residential	700	34
Campus Glen Dr. NE	Hogum Bay Rd. NE	End of Campus Glen Develop	100					Residential	1390	34
Campus Green Ct. NE	Campus Green Dr. NE	End of Road	88	89	89	88	89	Residential	190	31
Campus Green Dr. NE	Willamette Dr. NE	Campus Green Ct. NE	87	87	85	86	88	Residential	840	30
Campus Green Dr. NE	Campus Green Ct. NE	Meriwood Dr. NE	87	88	88	89	89	Residential	710	30
Campus Green Lp. NE	Campus Green Dr. NE	Campus Green Dr. NE	88	88	88	89	89	Residential	1050	31
Campus Highlands Dr. NE	Willamette Dr. NE	Cameron Dr. NE	77	78	82	82	84	Residential	1750	26
Campus Highlands Dr. NE	Cameron Dr. NE	Campus Park Dr. NE	93	92	94	95	96	Residential	655	33
Campus Highlands Dr. NE	Campus Park Dr. NE	Shepard Way NE	93	93	95	96	98	Residential	1050	33
Campus Highlands Dr. NE	Shepard Way NE	Bogey Dr. NE	93	93	95	96	98	Residential	1020	33
Campus Highlands Dr. NE	Bogey Dr. NE	46th Ave. NE	93	93	95	96	98	Residential	1220	33
Campus Meadows Lp. NE	Campus Glen Dr. NE	Snowberry St. NE	84	85	85	87	87	Residential	685	34

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Campus Meadows Lp. NE	Snowberry St. NE	Lupine St. NE	82	85	87	89	89	Residential	1065	32
Campus Park Dr. NE	Cameron Dr. NE	Campus Glen Dr. NE	86	87	87	87	89	Residential	975	38
Campus Park Dr. NE	Lewis Dr. NE	Meridian Dr. NE	88	88	87	87	89	Residential	750	31
Campus Park Dr. NE	Campus Glen Dr. NE	Lewis Dr. NE	88	88	89	89	89	Residential	1500	31
Campus Park Dr. NE	Jude Ct. NE	Cameron Dr. NE	92	93	95	95	95	Residential	1230	33
Campus Park Dr. NE	Capri Ct. NE	Jude Ct. NE	92	92	95	95	95	Residential	340	33
Campus Park Dr. NE	Campus Highlands Dr. NE	Capri Ct. NE	93	95	95	95	97	Residential	1090	33
Campus Prairie Lp. NE	31st Ave. NE	31st Ave. NE	88	88	88	89	89	Residential	1346	31
Campus Willows Lp. NE	Willamette Dr. NE	Willamette Dr. NE	93	95	95	95	96	Residential	1150	33
Candace Ct. SE	Komachin Lp. SE	End of Road	80	80	79	81	81	Residential	420	26
Candlewood Ct. SE	Candlewood Dr. SE	End of Road	87	89	87	88	89	Residential	340	34
Candlewood Dr. SE	Timberline Dr. SE	Clearwater Dr. SE	89	87	87	89	91	Residential	450	35
Canton Ave. NE	Orcas St. NE	Orcas Lp. NE	88	89	89	90	91	Residential	540	40
Capri Ct. NE	Campus Park Dr. NE	End of Road	93	91	95	95	95	Residential	130	33
Capstan Dr. NE	Lanyard Dr. NE	Preston St. NE	90	91	90	91	91	Residential	360	32
Carolina St. SE	66th Ave. SE	Texas Ave. SE	87	87	89	89	89	Residential	540	30
Carpenter Ct. SE	Diamond Lp. SE	End of Road	84	82	84	85	86	Residential	190	29
Carpenter Hills Lp. SE	Carpenter Rd. SE	Carpenter Rd. SE	75	71	71	73	75	Residential	2550	23
Carpenter Rd. NE	City Limits	I-5 Corridor	82	75	81	83	85	Arterial	1360	24
Carpenter Rd. NE	I-5 Corridor	Gravel Ln. NE	80	82	84	84	87	Arterial	1020	23
Carpenter Rd. NE	Gravel Ln. NE	Britton Pkwy. NE	82	82	84	84	85	Arterial	1050	24
Carpenter Rd. SE	Mullen Rd. SE	45th Ave. SE	35	35	37	38	39	Arterial	830	3
Carpenter Rd. SE	45th Ave. SE	41st Ave. SE	39	40	41	44	45	Arterial	1180	4
Carpenter Rd. SE	41st Ave. SE	38th Dr. SE	38	39	43	45	48	Arterial	930	3
Carpenter Rd. SE	38th Dr. SE	37th Ave. SE	40	41	41	44	45	Arterial	550	4
Carpenter Rd. SE	37th Ave. SE	32nd Ave. SE	34	35	36	38	41	Arterial	1510	2
Carpenter Rd. SE	Long Lake Park Entrance	26th Ct. SE	81	81	77	77	78	Arterial	1090	20
Carpenter Rd. SE	City Limits	Diamond Rd. SE	64	72	74	79	82	Arterial	1820	13
Carpenter Rd. SE	Diamond Rd. SE	Alanna Dr. SE	75	80	80	81	82	Arterial	910	19
Carpenter Rd. SE	Mills Landing Ct. SE	Carpenter Rd. SE	73	74	76	76	77	Residential	675	22
Carpenter Rd. SE	Pacific Ave. SE	City Limits	88	91	92	93	95	Arterial	680	23
Carpenter Rd. SE	6th Ave. SE	5th Way SE	88	91	92	93	95	Arterial	840	23
Carpenter Rd. SE	5th Way SE	City Limits	90	91	92	93	95	Arterial	1010	24
Carpenter Rd. SE	Alanna Dr. SE	Woodland Trail Crossing	68	74	75	77	78	Arterial	780	14
Carpenter Rd. SE	Woodland Trail Crossing	Pacific Ave. SE	83	89	92	93	95	Arterial	510	25
Cashmere Dr. NE	Dominion Ave. NE	Rushmore Ave. NE	88	89	89	89	89	Residential	1348	31
Cashmere Dr. NE	Rushmore Ave. NE	Columbia Way NE	88	89	88	88	89	Residential	1097	31
Catalina Dr. SE	Belair Dr. SE	End of Road	85	85	85	86	87	Residential	430	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Cedar Ct. SE	43rd Ave. SE	End of Road	71	71	74	76	77	Residential	550	20
Cedar Hills Ct. SE	28th Ave. SE	End of Road	72	72	75	77	78	Residential	600	21
Cedarbough Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	190	33
Century Ct. NE	15th Ave. NE	End of Road	73	74	66	66	67	Residential	1020	20
Chambers Lake Dr. SE	Golf Club Rd. SE	End of Road	68	69	71	72	74	Residential	1370	20
Chardonnay Dr. SE	Yelm Hwy. SE	Merlot Ln. SE	86	86	86	86	87	Residential	510	30
Chardonnay Dr. SE	Merlot Ln. SE	Rainier Lp. SE	87	88	88	88	89	Residential	1000	30
Charlotte Ct. SE	36th Ave. SE	End of Road	76	78	78	79	79	Residential	160	23
Cherokee Lp. SE	60th Ave. SE	60th Ave. SE	80	81	81	82	82	Residential	1280	26
Christa Dr. NE	Sebastian Dr. NE	31st Ave. NE	90	91	90	91	91	Residential	1220	32
Christine Ct. NE	Deni Dr. NE	End of Road	89	90	88	91	92	Residential	200	31
Church St. SE	14th Ave. SE	Lacey Blvd. SE	72	77	79	81	83	Residential	330	21
Citrine Ave. SE	Maricite St. SE	Shale St. SE	89	89	91	92	93	Residential	470	31
Classic Dr. NE	Deni Dr. NE	Mercedes Dr. NE	87	88	88	89	91	Residential	1020	30
Classic Dr. NE	Mercedes Dr. NE	Meridian Rd. NE	75	75	77	80	81	Residential	1300	23
Clearbrook Dr. SE	17th Ct. SE	Yonkers Dr. SE	73	73	74	77	80	Residential	890	18
Clearbrook Dr. SE	Yonkers Dr. SE	Lacey Blvd. SE	91	91	91	91	93	Residential	930	32
Clearbrook Dr. SE	Lacey Blvd. SE	Pacific Ave. SE	78	79	80	81	82	Collector	180	23
Clearwater Ct. SE	Clearwater Dr. SE	End of Road	75	77	75	77	77	Residential	115	26
Clearwater Dr. SE	Timberline Dr. SE	Clearwater Lp. SE	85	83	83	84	87	Residential	640	33
Clearwater Dr. SE	Clearwater Lp. SE	41st Ave. SE	87	87	87	88	89	Residential	1020	34
Clearwater Lp. SE	Clearwater Dr. SE	Clearwater Lp. SE	85	86	84	85	87	Residential	1740	33
Colleen Ct. SE	47th Ave. SE	End of Road	92	92	92	95	95	Residential	330	33
Colleen St. SE	47th Ave. SE	Natalee Dr. SE	92	92	93	95	95	Residential	420	33
College St. NE	Martin Way E	Park Center Ave. NE	62	64	68	71	73	Arterial	650	11
College St. NE	Park Center Ave. NE	6th Ave. NE	58	59	60	57	60	Arterial	1230	10
College St. NE	6th Ave. NE	8th Ave. NE	74	74	75	78	78	Arterial	540	16
College St. SE	Yelm Hwy. SE	Corporate Center Dr. SE	100	100	79	79	80	Arterial	1500	29
College St. SE	Corporate Center Dr. SE	50th Ave. SE	100	100	82	82	82	Arterial	700	29
College St. SE	50th Ave. SE	45th Ave. SE	100	100	82	82	83	Arterial	1640	29
College St. SE	45th Ave. SE	39th Ave. SE	100	100	76	76	77	Arterial	1320	29
College St. SE	39th Ave. SE	37th Ave. SE	100	100	78	78	79	Arterial	1210	29
College St. SE	37th Ave. SE	Montclair Dr. SE	74	77	77	78	77	Arterial	1480	16
College St. SE	Montclair Dr. SE	28th Ave. SE	75	77	77	80	82	Arterial	1150	19
College St. SE	28th Ave. SE	25th Ave. SE	76	77	78	81	83	Arterial	1320	20
College St. SE	25th Ave. SE	22nd Ave. SE	100	78	78	79	79	Arterial	830	29
College St. SE	22nd Ave. SE	18th Ave. SE	100	78	78	80	81	Arterial	1110	29
College St. SE	18th Ave. SE	14th Ave. SE	75	75	77	78	79	Arterial	1210	19

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
College St. SE	14th Ave. SE	Lacey Blvd. SE	79	81	83	78	80	Arterial	760	22
College St. SE	Lacey Blvd. SE	Pacific Ave. SE	79	81	81	81	76	Arterial	560	21
College St. SE	Pacific Ave. SE	Woodland Square Lp. SE	79	81	82	82	84	Arterial	1020	21
College St. SE	Woodland Square Lp. SE	6th Ave. SE	81	82	82	82	84	Arterial	1110	23
College St. SE	6th Ave. SE	I-5 Corridor	79	80	80	80	82	Arterial	1170	22
College St. SE	I-5 Corridor	Martin Way E	79	80	80	82	84	Arterial	520	22
Colorado Ave. SE	Virginia St. SE	Pennsylvania St. SE	87	89	88	89	89	Residential	555	30
Columbia Way NE	Vashon Dr. NE	Mercer Ct. NE	88	88	88	88	89	Residential	550	31
Columbia Way NE	Marvin Rd. NE	Edgewater Blvd. NE	89	91	93	93	95	Collector	920	24
Columbia Way NE	Edgewater Blvd. NE	Cashmere Dr. NE	89	91	93	93	95	Collector	790	24
Columbia Way NE	Cashmere Dr. NE	Vashon Dr. NE	89	91	93	93	95	Collector	900	24
Columbine Ct. SE	57th Ave. SE	End of Road	83	85	85	87	87	Residential	430	28
Commerce Place Dr. NE	Williamette Dr. NE	South End of Road	79	79	77	79	81	Residential	850	25
Commerce Place Dr. NE	Williamette Dr. NE	North End of Road	79	80	81	82	84	Residential	1680	25
Compass St. SE	71st Ave. SE	Balustrade Blvd. SE	83	83	85	86	88	Residential	1160	34
Compass St. SE	Balustrade Blvd. SE	66th Ave. SE	85	85	89	89	89	Residential	680	29
Compton Blvd. SE	Yelm Hwy. SE	Stockton St. SE	77	80	79	79	81	Residential	840	24
Compton Blvd. SE	Stockton St. SE	60th Ave. SE	77	76	74	76	78	Residential	1210	24
Compton Blvd. SE	60th Ave. SE	Compton Lp. SE	80	76	77	77	79	Residential	720	26
Compton Lp. SE	Compton Blvd. SE	Compton Blvd. SE	83	83	84	84	84	Residential	980	28
Cook Ct. NE	Stevens Dr. NE	End of Road	89	90	90	91	92	Residential	370	31
Cora St. SE	Mary Lou St. SE	12th Ave. SE	72	77	80	83	85	Residential	610	20
Corona Ct. NE	Aurora St. NE	End of Road	95	95	95	97	98	Residential	175	34
Corona St. NE	Aurora St. NE	Nova St. NE	93	93	95	96	98	Residential	430	33
Corporate Center Ct. SE	Corporate Center Dr. SE	End of Road	78	78	80	81	84	Collector	450	15
Corporate Center Dr. SE	Yelm Hwy. SE	Intelco Lp. SE	95	96	96	98	100	Collector	470	30
Corporate Center Dr. SE	Intelco Lp. SE	Intelco Lp. SE	95	96	96	98	100	Collector	1100	30
Corporate Center Dr. SE	Intelco Lp. SE	College St. SE	95	96	96	98	100	Collector	910	30
Corporate Center Lp. SE	Corporate Center Dr. SE	End of public street	71	74	74	75	75	Collector	325	12
Corvette Ct. NE	Mercedes Dr. NE	End of Road	78	77	80	82	83	Residential	230	25
Cory Ct. SE	61st Ave. SE	End of Road	81	82	84	86	87	Residential	190	27
Craney Ct. SE	Sidney St. SE	West End of Road	85	86	86	84	85	Residential	240	29
Craney Ct. SE	Sidney St. SE	East End of Road	85	86	86	86	87	Residential	410	29
Crestone St. NE	End of Road (alley)	End of Road (alley)	89	88	88	88	89	Residential	256	31
Crimson Ct. SE	Yelm Hwy. SE	End of Road	86	85	84	87	87	Residential	830	30
Crosswaters St. SE	Mullen Rd. SE	48th Ave. SE	84	84	84	84	85	Residential	140	29
Crowe St. SE	Lacey Blvd. SE	End of Road	78	78	81	82	85	Residential	660	32
Crystal Ct. SE	58th Ave. SE	End of Road	77	80	82	83	84	Residential	310	24

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Curtis Ct. SE	19th Ave. SE	End of Road	90	89	91	92	93	Residential	300	36
Cypress Dr. NE	Pavilion Way NE	Cypress Lp. NE	88	87	87	88	89	Residential	790	31
Cypress Lp. NE	Cypress Dr. NE	Vashon Dr. NE	88	87	89	89	89	Residential	1230	31
Danials Lp. SE	Compton Blvd. SE	Compton Blvd. SE	82	84	84	85	85	Residential	1120	27
Davis Ct. NE	Jeri Dr. NE	End of Road	89	90	90	91	92	Residential	380	31
Delaware Ave. SE	Virginia St. SE	Balustrade Blvd. SE	88	88	86	87	88	Residential	1115	31
Denali Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	89	88	88	88	89	Residential	443	31
Deni Dr. NE	Classic Dr. NE	31st Ave. NE	88	88	90	91	92	Residential	900	31
Deni Dr. NE	Nova St. NE	Classic Dr. NE	90	91	90	91	92	Residential	800	32
Deni Dr. NE	Willamette Dr. NE	Nova St. NE	93	93	95	96	97	Residential	800	33
Desmond Dr. SE	Martin Way E	End of Road	79	79	79	79	80	Collector	650	15
Detlefsen Pl. SE	24th Ave. SE	End of Road	97	97	99	100	100	Residential	240	34
Deuce Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	200	33
Diamond Ct. SE	Diamond Lp. SE	End of Road	80	81	81	82	81	Residential	320	26
Diamond Lp. SE	22nd Ave. SE	Diamond Rd. SE	74	78	80	81	79	Residential	1250	22
Diamond Lp. SE	Diamond Rd. SE	Diamond Rd. SE	78	81	81	81	83	Residential	1310	25
Diamond Rd. SE	Diamond Lp. SE	Diamond Lp. SE	77	78	80	81	79	Residential	730	24
Diamond Rd. SE	Diamond Lp. SE	Carpenter Rd. SE	85	87	87	88	89	Residential	700	35
Dogwood St. SE	20th Ave. SE	14th Ave. SE	89	89	90	89	90	Residential	1670	31
Dogwood St. SE	14th Ave. SE	End of Road	87	89	89	91	92	Residential	400	34
Dominion Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	87	89	90	Residential	290	31
Donegal Ct. SE	Hicks Lake Rd. SE	End of Road	85	87	87	87	87	Residential	530	29
Drake Ct. NE	Vancouver Dr. NE	End of Road	91	92	90	91	92	Residential	140	32
Dudley Ct. NE	Shepard Way NE	End of Road	93	93	95	96	98	Residential	280	33
Dudley Dr. NE	Shepard Way NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	1370	33
Durham St. SE	Helena St. SE	Natalee Dr. SE	91	90	90	90	91	Residential	990	32
Eagle Dr. NE	Bonanza Dr. NE	City Limits	81	85	81	83	83	Residential	630	27
Eagle Lp. NE	Raptor Ave. NE	Raptor Ave. NE	92	93	93	95	95	Residential	1520	33
Earhart St. NE	Campus Park Dr. NE	Amelia Ct. NE	93	93	95	95	95	Residential	460	33
East St. SE	12th Ave. SE	End of Road	79	84	87	87	89	Residential	460	28
Edgewater Blvd. NE	41st Ave. NE	Rushmore Ave. NE	84	86	83	84	87	Residential	1519	28
Edgewater Blvd. NE	Rushmore Ave. NE	Columbia Way NE	86	86	85	85	87	Residential	996	30
Edsel Ct. NE	Mercedes Dr. NE	End of Road	78	78	80	80	81	Residential	110	25
Eld Ct. NE	Vancouver Dr. NE	South End of Road	90	91	90	91	92	Residential	290	32
Eld Ct. NE	Vancouver Dr. NE	North End of Road	88	89	90	91	92	Residential	300	31
Ellsworth Ct. NE	Cameron Dr. NE	End of Road	85	85	89	89	90	Residential	280	36
Elm Ct. SE	Cedar Ct. SE	End of Road	74	75	79	81	82	Residential	210	22
Emerald St. SE	58th Ave. SE	54th Ave. SE	75	75	75	75	73	Residential	1160	23

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Emerald St. SE	54th Ave. SE	Lake Hills St. SE	96	96	97	98	100	Residential	950	34
Enterprise Dr. NE	6th Ave. NE	Hornet Dr. NE	87	87	89	91	93	Residential	740	38
Enterprise Dr. NE	Hornet Dr. NE	15th Ave. NE	74	79	88	91	91	Residential	680	21
Essex Pl. NE	Lexington Pl. NE	End of Road	92	93	93	93	95	Residential	150	33
Evie St. SE	Andrew St. SE	49th Ave. SE	99	100	100	100		Residential	400	34
Fairhill Dr. NE	31st Ave. NE	White Fir Dr. NE	86	87	88	88	89	Residential	550	30
Fairhill Dr. NE	White Fir Dr. NE	East End of Road	86	87	87	88	89	Residential	650	30
Fairweather St. NE	End of Road (alley)	End of Road (alley)	89	88	88	88	89	Residential	370	31
Fiddleback St. NE	Britton Pkwy. NE	End of Road	95	96	96	98	100	Residential	825	34
Fir Ct. SE	43rd Ave. SE	End of Road	76	75	78	79	79	Residential	200	23
Flute St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	88	88	89	Residential	950	30
Flute St. SE	Balustrade Blvd. SE	66th Way SE	85	86	86	87	87	Residential	830	29
Forest Ct. SE	37th Ave. SE	End of Road	86	87	87	88	88	Residential	200	30
Forrestal Pl. NE	Enterprise Dr. NE	End of Road	92	92	93	93	95	Residential	920	33
Fortman Dr. NE	Lanyard Dr. NE	End of Road	89	89	90	91	92	Residential	1020	31
Foxglove Ct. SE	Rumac St. SE	End of Road	79	83	83	84	84	Residential	480	25
Franklin Pl. NE	Forrestal Pl. NE	End of Road	93	93	93	93	95	Residential	140	33
Franz St. SE	Lacey Blvd. SE	Pacific Ave. SE	49	55	56	58	59	Collector	670	7
Freemont St. NE	Traditions Ave. NE	Columbia Way NE	88	88	88	88	89	Residential	1336	31
Fresco Dr. SE	Balustrade Blvd. SE	Breeze St. SE	88	88	88	89	89	Residential	890	31
Galaxy Dr. NE	Martin Way E	Quinault Dr. NE	81	82	82	81	83	Collector	1830	16
Galena St. SE	Kapalea Way SE	End of Road	89	88	89	89	90	Residential	650	31
Gateway Blvd. NE	Main St. NE	Britton Pkwy. NE	84	85	87	87	88	Collector	1575	20
Gateway Blvd. NE	Britton Pkwy. NE	Birdseye Ave. NE	93	94	95	96	100	Collector	520	27
Gem Ct. SE	58th Ave. SE	End of Road	78	79	79	80	81	Residential	140	25
Gemini St. SE	Ruddell Rd. SE	15th Ave. SE	86	88	90	91	92	Residential	1100	44
Gemini St. SE	15th Ave. SE	Alder St. SE	84	86	86	87	89	Residential	840	40
Georgie Ct. SE	36th Ave. SE	End of Road	67	71	73	74	75	Residential	160	18
Gerald St. SE	Martin Way E	Litt Dr. SE	97	99	100	100		Collector	420	24
Gladiator St. NE	31st Ave. NE	Hanna Dr. NE	96	98	98	100	100	Residential	500	34
Glen Alda Ct. SE	5th Way SE	End of Road	72	73	74	76	77	Residential	700	21
Glen Ct. SE	5th Way SE	End of Road	73	75	75	76	77	Residential	230	22
Glen Mary Dr. SE	13th Ave. SE	Alanna Dr. SE	90	90	90	91	91	Residential	1300	32
Gold Finch Ct. SE	38th Dr. SE	End of Road	75	76	75	76	77	Residential	190	23
Gold Finch Dr. SE	38th Dr. SE	38th Dr. SE	71	74	74	74	75	Residential	1690	20
Golf Club Pl. SE	7th Ave. SE	6th Ave. SE	69	73	75	75	77	Collector	480	11
Golf Club Rd. SE	Chambers Lake Dr. SE	22nd Ave. SE	85	87	87	88	89	Residential	1140	42
Golf Club Rd. SE	22nd Ave. SE	19th Ave. SE	85	85	87	89	89	Collector	820	26

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Golf Club Rd. SE	19th Ave. SE	16th Ave. SE	85	85	85	87	89	Collector	820	26
Golf Club Rd. SE	16th Ave. SE	14th Ave. SE	78	78	82	83	83	Collector	820	23
Golf Club Rd. SE	14th Ave. SE	Lacey Blvd. SE	44	48	49	51	51	Collector	1170	4
Golf Club Rd. SE	Pacific Ave. SE	7th Ave. SE	76	77	81	73	73	Collector	1140	21
Golf Club Rd. SE	6th Ave. SE	3rd Ave. SE	96	97	97	98	100	Collector	770	23
Gray Ct. NE	Vancouver Dr. NE	End of Road	88	89	90	91	92	Residential	270	31
Green Ct. SE	5th Way SE	End of Road	71	73	75	77	79	Residential	140	20
Greenbriar St. SE	45th Ave. SE	End of Road	87	88	88	88	88	Residential	740	30
Greenlawn St. SE	Brentwood Dr. SE	27th Ave. SE	97	97	98	100	100	Residential	1500	34
Greenview Dr. NE	Cashmere Dr. NE	Columbia Way NE	89	89	89	89	90	Residential	481	31
Hall St. SE	14th Ave. SE	Lacey Blvd. SE	84	84	85	88	86	Residential	1400	41
Hanna Ct. NE	31st Ave. NE	End of Road	90	91	88	89	91	Residential	430	32
Hanna Dr. NE	31st Ave. NE	Gladiator St. NE	96	98	98	100	100	Residential	850	34
Hanna Dr. NE	Gladiator St. NE	Hercules Dr. NE	97	99	100	100		Residential	480	34
Hanover Dr. SE	20th Ave. SE	19th Ave. SE	63	65	64	65	65	Residential	1000	16
Hanover Dr. SE	19th Ave. SE	Clearbrook Dr. SE	54	55	56	58	61	Residential	820	11
Harrier St. NE	Eagle Lp. NE	Raptor Ave. NE	93	93	93	95	95	Residential	380	33
Harstene St. NE	Camano Lp. NE	Camano Lp. NE	90	89	92	92	93	Residential	450	32
Hawks Prairie Rd. NE	Western City Limits	Marvin Rd. NE	79	81	84	86	87	Collector	1230	15
Hawks Prairie Rd. NE	Marvin Rd. NE	Hogum Bay Rd. NE	79	80	83	85	87	Collector	3970	17
Hawks Prairie Rd. NE	Hogum Bay Rd. NE	End of Road	87	88	91	91	92	Residential	700	39
Hayworth Ave. NE	Hepburn St. NE	Bacall St. NE	91	91	91	91	92	Residential	1020	32
Helena Ave. SE	Durham St. SE	End of Road	91	91	92	93	93	Residential	900	32
Hemlock Ct. SE	22nd Ave. SE	End of Road	76	73	73	74	74	Residential	200	23
Hepburn St. NE	Hawks Prairie Rd. NE	End of Road	91	91	92	92	92	Residential	1300	32
Hera St. NE	Adonis Ave. NE	Atlas Ave. NE	95	96	96	98	100	Residential	360	34
Hercules Dr. NE	Campus Glen Dr. NE	Atlas Ave. NE	95	95	96	98	100	Collector	530	23
Hercules Dr. NE	Atlas Ave. NE	31st St. NE	96	97	98	99	100	Collector	1260	23
Herron St. NE	Vashon Dr. NE	Waldron Dr. NE	95	95	96	98	100	Residential	975	34
Hicks Lake Rd. SE	Donegal Ct. SE	25th Ave. SE	59	59	63	63	66	Residential	1070	14
Hicks Lake Rd. SE	30th Ave. SE	Donegal Ct. SE	57	59	61	66	66	Residential	940	13
Hogum Bay Ext. Rd. NE	Hogum Bay Rd. NE	Landfill Rd. NE (gate)	88	88	87	87	87	Residential	800	31
Hogum Bay Rd. NE	Marvin Rd. NE	Williamette Dr. NE	96	99	100	100	37	Arterial	1420	25
Hogum Bay Rd. NE	Williamette Dr. NE	28th Ct. NE	96	99	100	100	29	Arterial	810	25
Hogum Bay Rd. NE	28th Ct. NE	30th Ave. NE	96	99	100	100	35	Arterial	1250	25
Hogum Bay Rd. NE	30th Ave. NE	31st Ave. NE	96	99	100	100	37	Arterial	830	25
Hogum Bay Rd. NE	31st Ave. NE	Hawks Prairie Rd. NE	80	84	86	86	52	Arterial	2170	19
Hogum Bay Rd. NE	Hawks Prairie Rd. NE	End of Road	81	83	84	84	84	Residential	1800	30

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Hoh St. NE	Martin Way E	City Limits	79	80	79	80	80	Collector	950	15
Hoh St. SE	Martin Way E	Litt Dr. SE	94	94	94	94	93	Collector	1090	23
Hoh St. SE	Litt Dr. SE	End of Road	98	99	100	100		Collector	680	24
Homann Dr. SE	Lacey Elementary School	15th Ave. SE	54	57	57	57	57	Residential	1010	11
Homann Dr. SE	15th Ave. SE	Pacific Ave. SE	56	59	62	62	64	Residential	1410	12
Hornet Dr. NE	Forrestal Pl. NE	Enterprise Dr. NE	91	92	92	92	95	Residential	470	32
Hornet Pl. NE	Forrestal Pl. NE	End of Road	92	92	92	92	94	Residential	260	33
Hydra St. NE	Corona St. NE	Deni Dr. NE	93	95	95	97	98	Residential	415	33
Ida Jane Way SE	35th Ave. SE	33rd Ave. SE	83	84	86	87	89	Residential	540	40
Ida Jane Way SE	36th Ave. SE	35th Ave. SE	91	91	92	93	95	Residential	380	32
Impala Dr. SE	31st Ave. SE	End of Road	80	84	82	84	84	Residential	1030	34
Impala Dr. SE	31st Ave. SE	28th Ave. SE	80	82	80	82	82	Residential	1100	34
Indiana St. SE	Colorado Ave. SE	Delaware Ave. SE	88	88	88	89	89	Residential	660	31
Ingleside Dr. SE	Kapalea Way SE	End of Road	88	89	88	88	89	Residential	1000	31
Ingleside Dr. SE	Kapalea Way SE	Zermatt St. SE	88	87	88	88	89	Residential	820	31
Ingleside Dr. SE	Zermatt St. SE	37th Ave. SE	87	87	87	90	90	Residential	950	30
Ingleside Lp. SE	Ingleside Dr. SE	Ingleside Dr. SE	87	88	88	89	91	Residential	940	30
Ingleside Way SE	Ingleside Dr. SE	Avonlea Dr. SE	90	90	88	88	89	Residential	250	32
Inlay St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	85	85	86	86	Residential	1660	29
Inlay St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Intelco Lp. SE	Corporate Center Dr. SE	Roxanna Dr. SE	75	77	77	79	80	Collector	1900	13
Intelco Lp. SE	Roxanna Dr. SE	Corporate Center Dr. SE	74	75	77	79	80	Collector	1300	13
Ipsut Ct. SE	Mt. Tahoma Dr. SE	End of Road	91	91	93	87	89	Residential	530	37
Jacobson Ct. SE	57th Ave. SE	End of Road	83	85	84	83	84	Residential	150	28
Jaguar Ct. NE	Alexander Dr. NE	End of Road	78	78	78	80	81	Residential	220	25
James St. SE	57th Ave. SE	Stockton St. SE	83	85	86	86	87	Residential	790	28
Jason Ct. SE	54th Ave. SE	End of Road	86	86	86	87	88	Residential	230	30
Jeffrey Ct. SE	Komachin Lp. SE	End of Road	84	86	86	87	87	Residential	380	29
Jeri Dr. NE	Deni Dr. NE	Deni Dr. NE	89	90	90	91	92	Residential	1400	31
Jessica Ct. SE	Komachin Lp. SE	End of Road	86	86	85	87	87	Residential	240	30
Jo Ann Ct. SE	36th Ave. SE	End of Road	74	74	74	75	76	Residential	160	22
Josephine Ct. SE	14th Ave. SE	End of Road	89	89	89	90	90	Residential	540	31
Jubilee Rd. NE	41st Ave. NE	Bainbridge Lp. NE	84	85	87	87	89	Residential	390	28
Judd St. SE	28th Ave. SE	26th Ave. SE	80	80	79	81	75	Residential	1060	26
Judd St. SE	26th Ave. SE	25th Ave. SE	97	97	99	100	100	Residential	500	34
Judd St. SE	24th Ave. SE	22nd Ave. SE	78	82	87	87	89	Residential	570	25
Judd St. SE	22nd Ave. SE	19th Ave. SE	79	77	77	79	81	Residential	860	25
Judd St. SE	19th Ave. SE	Ruddell Rd. SE	79	79	79	81	81	Residential	1020	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Judd St. SE	25th Ave. SE	24th Ave. SE	97	97	98	100	100	Residential	240	34
Jude Ct. NE	Campus Park Dr. NE	End of Road	93	93	95	95	95	Residential	260	33
Juliann Ct. SE	Komachin Lp. SE	End of Road	80	82	82	83	83	Residential	340	26
Juniper Ct. SE	Arbor Dr. SE	End of Road	68	75	77	79	79	Residential	190	21
Juno Ct. NE	Atlas Ave. NE	End of Road	95	96	96	98	100	Residential	250	34
Juno St. NE	Adonis Ave. NE	Atlas Ave. NE	95	96	96	98	100	Residential	360	34
Kapalea Way SE	Ingleside Dr. SE	Nelson Rd. SE	89	88	88	90	91	Residential	700	31
Kapalea Way SE	Shale St. SE	Galena St. SE	89	89	87	88	88	Residential	550	31
Kapalea Way SE	Nelson Rd. SE	Shale St. SE	89	89	88	90	90	Residential	560	31
Kathy Ct. SE	36th Ave. SE	End of Road	59	65	66	67	67	Residential	150	14
Keegan St. NE	Webster Dr. NE	Fortman Dr. NE	89	89	90	91	92	Residential	390	31
Kelly Ct. NE	Deni Dr. NE	End of Road	89	90	90	91	92	Residential	370	31
Kendra Ct. SE	James St. SE	End of Road	85	85	84	82	82	Residential	320	29
Ken-Jan Ct. SE	Greenbriar St. SE	End of Road	88	88	89	89	89	Residential	290	31
Kenrick St. SE	50th Ave. SE	49th Ave. SE	99	100	100	100		Residential	470	34
Keystone Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	88	88	89	Residential	489	31
Koala St. SE	Stikes Woods Dr. SE	Ruddell Rd. SE	83	84	86	87	88	Residential	540	28
Koala St. SE	39th Ave. SE	Stikes Woods Dr. SE	85	86	84	85	83	Residential	1160	29
Kodiak Ave. NE	Freemont St. NE	Edgewater Blvd. NE	89	88	88	89	89	Residential	709	31
Komachin Lp. SE	54th Ave. SE	Tyler Ct. SE	83	83	83	84	85	Residential	830	28
Komachin Lp. SE	Tyler Ct. SE	Jeffery Ct. SE	85	85	85	86	87	Residential	930	29
Komachin Lp. SE	Jeffery Ct. SE	Rustin Ct. SE	85	85	85	87	87	Residential	550	29
Komachin Lp. SE	Rustin Ct. SE	Stockton St. SE	81	81	83	84	85	Residential	570	27
Kona St. NE	33rd Way NE	34th Ave. NE	90	91	92	92	92	Residential	425	32
Kona St. NE	34th Ave. NE	Hawks Prairie Rd. NE	90	91	91	91	92	Residential	585	32
Lacey Blvd. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	57	58	65	66	64	Collector	1150	7
Lacey Blvd. SE	Golf Club Rd. SE	College St. SE	79	80	80	80	83	Arterial	1365	21
Lacey Blvd. SE	College St. SE	Ruddell Rd. SE	79	80	80	80	81	Arterial	1340	21
Lacey Blvd. SE	Ruddell Rd. SE	Alder St. SE	81	81	82	80	82	Arterial	990	23
Lacey Blvd. SE	Alder St. SE	Lebanon St. SE	83	85	86	84	84	Arterial	910	24
Lacey Blvd. SE	Lebanon St. SE	Pacific Ave. SE	78	81	80	80	82	Arterial	910	21
Lacey St. SE	Pacific Ave. SE	7th Ave. SE	73	74	77	80	81	Residential	1650	22
Lackland Ct. NE	Lanyard Dr. NE	End of Road	90	90	90	91	92	Residential	200	32
Lake Hills St. SE	54th Ave. SE	Emerald St. SE	75	80	80	81	83	Residential	780	23
Lakecrest St. SE	37th Ave. SE	35th Ct. SE	74	73	73	72	74	Residential	440	22
Lakeside Dr. SE	26th Lp. SE	End of Road	97	97	98	99	100	Residential	150	38
Lakeview Ct. SE	37th Ave. SE	End of Road	81	82	79	80	81	Residential	540	27
Lakeview Dr. SE	30th Ave. SE	29th Ave. SE	75	77	81	82	82	Residential	630	23

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Langley Pl. NE	Enterprise Dr. NE	End of Road	92	93	93	93	94	Residential	440	33
Lanier Ct. SE	38th Ave. SE	End of Road	92	93	91	93	93	Residential	585	33
Lanyard Dr. NE	Webster Dr. NE	End of Road	89	89	90	91	91	Residential	2090	31
Larch St. SE	25th Ave. SE	22nd Ave. SE	87	88	88	89	89	Residential	990	34
Lebanon St. SE	20th Ave. SE	14th Ave. SE	84	84	84	84	85	Residential	1670	35
Lebanon St. SE	14th Ave. SE	Lacey Blvd. SE	88	88	89	89	90	Residential	720	31
Lebanon St. SE	Lacey Blvd. SE	Pacific Ave. SE	100	100				Residential	345	34
Leisure Way SE	Chambers Lake Dr. SE	Gate	85	86	88	89	90	Residential	400	42
Lewis Dr. NE	Vancouver Dr. NE	Campus Park Dr. NE	88	89	90	91	92	Residential	730	31
Lewis Dr. NE	Barklay Rd. NE	Vancouver Dr. NE	90	91	90	91	92	Residential	870	32
Lexington Pl. NE	Enterprise Dr. NE	End of Road	91	91	93	93	95	Residential	520	32
Lilac St. SE	25th Ave. SE	Lacey Elementary School	97	97	99	100	100	Collector	1290	24
Litt Dr. SE	Hoh St. SE	End of Road	98	99	100	100		Collector	1300	24
Livingston Ct. NE	Livingston St. NE	End of Road	55	56	55	57	60	Residential	200	12
Livingston St. NE	8th Ave. NE	15th Ave. NE	80	80	80	81	83	Residential	960	35
Logan Dr. NE	McKinley St. NE	Keystone Ave. NE	89	89	89	89	89	Residential	893	31
London Lp. NE	Campus Glen Dr. NE	Madrid St. NE	89	89	89	90	90	Residential	400	31
Long Lake Dr. SE	32nd Ave. SE	City Limits	82	80	80	81	81	Residential	650	27
Lopez Ct. NE	Vashon Dr. NE	End of Road	88	93	88	89	89	Residential	312	31
Loren St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	91	91	92	Residential	585	32
Lupine St. NE	Campus Glen Dr. NE	Campus Meadows Lp. NE	88	89	89	89	89	Residential	360	31
Lynn Ct. NE	Deni Dr. NE	End of Road	89	90	88	91	92	Residential	400	31
Madera Ct. SE	Sierra Dr. SE	End of Road	68	70	70	70	71	Residential	330	19
Madrid St. NE	Willamette Dr. NE	London Lp. NE	86	87	89	90	90	Residential	310	30
Madrona Ct. SE	38th Dr. SE	End of Road	80	83	83	84	84	Residential	500	26
Magnolia Ct. SE	38th Dr. SE	End of Road	80	80	82	83	83	Residential	250	26
Magnolia St. SE	16th Ave. SE	South End of Road	99	100	100	81	82	Residential	360	34
Magnolia St. SE	16th Ave. SE	North End of Road	99	100	100	79	80	Residential	380	34
Main St. NE	Gateway Bvd. NE	West End of Road	91	91	91	91	91	Collector	440	21
Main St. NE	Gateway Bvd. NE	East End of Road	91	91	91	92	93	Arterial	400	24
Main St. NE	Marvin Rd. NE	End of Road	91	94	94	95	95	Arterial	1200	24
Malibu Ct. SE	Carmel Ln. SE	Malibu Dr. SE	93	95	95	96	98	Residential	250	33
Malibu Dr. SE	Carpenter Rd. SE	Laguna Ln. SE	92	94	94	95	97	Residential	1520	33
Malibu Dr. SE	Laguna Ln. SE	Carpenter Rd. SE	93	95	95	96	98	Residential	950	33
Maple Hills Dr. SE	Sunset Dr. SE	End of Road	68	69	70	71	73	Residential	950	19
Maricite St. SE	Kapalea Way SE	End of Road	89	89	89	90	91	Residential	1040	31
Marietta Ct. NE	Vashon Dr. NE	End of Road	89	89	93	93	93	Residential	535	31
Martin Way E	College St. SE	I-5 Corridor	70	74	79	73	75	Arterial	630	15

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Martin Way E	I-5 Corridor	Desmond Dr. SE	71	74	90	76	77	Arterial	1660	15
Martin Way E	Desmond Dr. SE	Carpenter Rd. SE	78	81	90	75	77	Arterial	3270	21
Martin Way E	City Limits	Marvin Rd. SE	78	78	78	78	79	Arterial	1440	21
Martin Way E	Marvin Rd. SE	Hoh St. NE	74	79	81	81	81	Arterial	2320	18
Martin Way E	Hoh St. SE	River Ridge Dr. SE	74	78	81	81	81	Arterial	1420	18
Martin Way E	River Ridge Dr. SE	East End of Copper Wood Apt	77	81	81			Arterial	1600	20
Marvin Rd. NE	Martin Way E	I-5 Corridor	69	69	70	74	76	Arterial	2030	14
Marvin Rd. NE	Britton Pkwy. NE	29th Ave. NE	96	97	98	100	100	Arterial	1550	25
Marvin Rd. NE	29th Ave. NE	32nd Ave. NE	75	80	84	84	80	Arterial	2030	19
Marvin Rd. NE	32nd Ave. NE	Hawks Prairie Rd. NE	73	77	83	83	84	Arterial	2015	17
Marvin Rd. NE	Hawks Prairie Rd. NE	41st Ave. NE	68	71	69	69	70	Arterial	1880	14
Marvin Rd. NE	41st Ave. NE	44th Ave. NE	93	93	95	95	98	Arterial	2200	25
Marvin Rd. NE	44th Ave. NE	Northern City Limits	93	93	95	95	98	Arterial	990	25
Marvin Rd. NE	I-5 Corridor	Main St. NE	100	70	70	73	79	Arterial	1040	14
Marvin Rd. NE	Main St. NE	Britton Pkwy. NE	71	77	77	78	81	Arterial	740	15
Marvin Rd. SE	City Limits	Martin Way E	69	70	72	73	74	Arterial	980	15
Mary Lou St. SE	12th Ave. SE	Lisa Ln. SE	76	81	83	85	85	Residential	620	24
Mary Lou St. SE	Lisa Ln. SE	Cora St. SE	89	89	89	91	92	Residential	380	35
Maxine St. SE	25th Ave. SE	22nd Ave. SE	85	86	84	85	88	Residential	990	33
McKinley Lp. NE	McKinley St. NE	McKinley St. NE	89	89	89	90	91	Residential	710	31
McKinley St. NE	Dominion Ave. NE	Rushmore Ave. NE	87	89	87	87	89	Residential	1270	30
McKinley St. NE	Rushmore Ave. NE	Keystone Ave. NE	89	89	88	88	89	Residential	902	31
Meadow Dr. SE	Trillium St. SE	Gate	98	99	100	100		Residential	145	34
Meadow Lake St. SE	37th Ave. SE	Meade Ln. SE	93	93	93	95	95	Residential	480	33
Melody Dr. SE	Sycamore Dr. SE	22nd Ave. SE	87	87	90	91	91	Residential	510	34
Mercedes Dr. NE	Classic Dr. NE	Royce Ct. NE	75	76	78	78	79	Residential	1290	23
Mercedes Dr. NE	Royce Ct. NE	Classic Dr. NE	73	74	77	80	81	Residential	840	22
Mercer Ct. NE	Vashon Dr. NE	End of Road	88	89	89	89	89	Residential	407	31
Meridian Rd. NE	Orion Dr. NE	Helen Ave. NE	94	91	91	93	94	Collector	1000	23
Meridian Rd. NE	Helen Ave. NE	White Fir Dr. NE	92	93	95	96	97	Collector	1980	27
Meridian Rd. NE	White Fir Dr. NE	31st Ave. NE	92	93	95	96	97	Collector	1230	27
Meridian Rd. NE	31st Ave. NE	Campus Park Dr. NE	100	67	69	70	70	Collector	1330	24
Meridian Rd. NE	Campus Park Dr. NE	39th Lp. NE	100	67	69	69	69	Collector	1570	24
Meridian Rd. NE	39th Lp. NE	46th Ave. NE	100	43	49	50	51	Collector	3640	24
Meriwood Dr. NE	Williamette Dr. NE	Gate	89	89	89	89	89	Residential	1260	31
Meriwood Dr. NE	Vashon Dr. NE	Anderson Ct. NE	86	87	88	88	89	Residential	500	37
Meriwood Dr. NE	Anderson Ct. NE	Shaw Ln. NE	90	91	95	97	98	Residential	450	42
Meriwood Dr. NE	Shaw Ln. NE	End of Road	90	91	95	97	98	Residential	1575	42

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Merrill Ct. NE	Cameron Dr. NE	End of Road	89	89	89	89	90	Residential	400	31
Mia St. NE	33rd Ave. NE	33rd Way NE	91	92	92	92	93	Residential	235	32
Michael Ct. NE	Campus Park Dr. NE	End of Road	93	94	95	95	97	Residential	125	33
Michelle Ct. SE	41st Ave. SE	End of Road	89	89	89	89	90	Residential	230	31
Midway Dr. NE	6th Ave. NE	Enterprise Dr. NE	86	89	92	93	95	Residential	1370	40
Mills Landing Ct. SE	Carpenter Rd. SE	End of Road	89	89	89	90	91	Residential	333	31
Montclair Ct. SE	Montclair Dr. SE	South End of Road	90	89	89	92	92	Residential	180	36
Montclair Ct. SE	Montclair Dr. SE	North End of Road	86	88	87	88	91	Residential	230	30
Montclair Dr. SE	College St. SE	Montclair Ct. SE	79	76	78	78	80	Residential	460	25
Montclair Dr. SE	Montclair Ct. SE	End of Road	84	85	86	87	87	Residential	1120	28
Mossy Rock Ave. NE	Spokane St. NE	Orcas St. NE	87	87	87	88	90	Residential	570	38
Mossy Rock Ave. NE	Orcas St. NE	Orcas Lp. NE	88	88	89	90	91	Residential	580	40
Mowich Ct. SE	54th Ave. SE	End of Road	91	91	93	86	87	Residential	400	37
Mt. Adams St. SE	57th Ave. SE	56th Ave. SE	85	85	87	88	88	Residential	550	29
Mt. Baker St. SE	57th Ave. SE	56th Ave. SE	85	86	87	88	88	Residential	410	29
Mt. Olympus St. SE	Yelm Hwy. SE	56th Ave. SE	85	83	87	88	88	Residential	680	29
Mt. Rainier St. SE	57th Ave. SE	56th Ave. SE	85	87	85	86	86	Residential	540	29
Mt. Saint Helens St. SE	57th Ave. SE	56th Ave. SE	87	87	87	88	88	Residential	540	30
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	South End of Road	69	71	72	66	68	Residential	420	19
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	North End of Road	76	77	79	70	71	Residential	300	24
Mt. Tahoma Dr. SE	Mt. Tahoma Ct. SE	54th Ave. SE	75	74	77	74	75	Residential	420	23
Mt. Tahoma Dr. SE	54th Ave. SE	End of Road	63	65	66	63	65	Residential	800	16
Muir Ct. SE	54th Ave. SE	End of Road	89	89	91	86	86	Residential	380	35
Mullen Rd. SE	Ruddell Rd. SE	Funeral Home Entrance	81	86	86	87	87	Arterial	910	24
Mullen Rd. SE	Funeral Home Entrance	Timberline HS Access Rd	87	86	86	87	87	Arterial	910	22
Mullen Rd. SE	Timberline HS Access Rd	Lakes Elem. Exit	85	88	88	89	89	Arterial	690	22
Mullen Rd. SE	Lakes Elem. Exit	City Limits	82	82	82	83	83	Arterial	1040	25
Mullen Rd. SE	Rosemount Ct. SE	Crosswaters St. SE	61	68	70	70	66	Arterial	960	11
Mullen Rd. SE	Crosswaters St. SE	Afflerbaugh Dr. SE	68	72	70	70	66	Arterial	920	14
Mullen Rd. SE	College St. SE	Stikes Dr. SE	83	85	87	87	88	Arterial	1710	25
Mullen Rd. SE	Stikes Dr. SE	Park Place Dr. SE	85	85	87	89	90	Arterial	1170	28
Mullen Rd. SE	Park Place Dr. SE	Ruddell Rd. SE	81	87	87	87	90	Arterial	1320	23
Mulligan Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	485	33
Muriel Ct. SE	27th Ct. SE	End of Road	81	82	82	83	83	Residential	620	27
Narada Ct. SE	54th Ave. SE	End of Road	68	70	72	64	66	Residential	410	19
Natalee Dr. SE	Durham St. SE	Colleen St. SE	91	90	92	93	93	Residential	940	32
Nelson Rd. SE	Kapalea Way SE	Ingleside Dr. SE	58	59	67	68	69	Residential	1030	13
Noble Firs Ct. SE	14th Ave. SE	End of Road	83	84	84	85	85	Residential	430	28

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Northridge Pl. SE	39th Ave. SE	End of Road	62	63	72	74	75	Residential	400	15
Notter St. SE	15th Ave. SE	14th Ave. SE	91	90	90	91	92	Residential	340	32
Nova St. NE	Corona St. NE	Deni Dr. NE	93	95	95	97	100	Residential	415	33
Oklahoma St. SE	Colorado Ave. SE	Delaware Ave. SE	88	88	88	89	89	Residential	725	31
Opal Ct. SE	58th Ave. SE	End of Road	72	75	76	77	78	Residential	220	21
Orcas Ct. NE	Orcas Lp. NE	End of Road	86	86	87	90	91	Residential	350	37
Orcas Lp. NE	Orcas St. NE	Knuckle	88	88	89	90	91	Residential	640	40
Orcas Lp. NE	Knuckle	Canton Ave. NE	85	86	87	90	91	Residential	730	35
Orcas Lp. NE	Canton Ave. NE	Orcas St. NE	86	89	89	90	91	Residential	580	37
Orcas Pl. NE	Orcas St. NE	End of Road	89	89	90	91	92	Residential	130	31
Orcas St. NE	Orcas Lp. NE	Canton Ave. NE	87	89	89	89	90	Residential	700	38
Orcas St. NE	Canton Ave. NE	Orcas Lp. NE	87	87	95	89	90	Residential	885	38
Orcas St. NE	Orcas Lp. NE	Meriwood Dr. NE	89	89	89	89	90	Residential	500	31
Orion Dr. NE	Williamette Dr. NE	Meridian Rd. NE	61	67	74	78	80	Collector	4050	9
Pacific Ave. SE	Western City Limits	Sleater Kinney Rd. SE	66	66	69	71	71	Arterial	1350	13
Pacific Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	72	75	74	75	76	Arterial	1220	17
Pacific Ave. SE	Golf Club Rd. SE	College St. SE	79	82	84	87	88	Arterial	1160	21
Pacific Ave. SE	College St. SE	Ruddell Rd. SE	79	83	83	85	86	Arterial	1300	21
Pacific Ave. SE	Ruddell Rd. SE	Franz St. SE	83	83	85	85	86	Arterial	650	24
Pacific Ave. SE	Franz St. SE	Bowker St. SE	84	83	83	87	88	Arterial	1380	25
Pacific Ave. SE	Bowker St. SE	Lacey St. SE	86	85	85	87	88	Arterial	700	26
Pacific Ave. SE	Lacey St. SE	Carpenter Rd. SE	75	77	78	80	82	Arterial	1290	19
Pacific Ave. SE	Carpenter Rd. SE	Eastern City Limits	71	78	80	82	84	Arterial	620	17
Park Center Ave. NE	College St. NE	End of Road	82	82	83	84	85	Residential	600	27
Park Place Lp. SE	45th Ave. SE	44th Ct. SE	86	86	84	87	87	Residential	820	30
Park Place Lp. SE	43rd Ave. SE	45th Ave. SE	84	84	84	85	85	Residential	790	29
Park Place Lp. SE	44th Ct. SE	Mullen Rd. SE	84	84	82	83	83	Residential	530	29
Park Place Lp. SE	Mullen Rd. SE	43rd Ave. SE	82	80	80	83	85	Residential	890	27
Parkside Dr. SE	49th Ave. SE	47th Ave. SE	86	86	88	88	89	Residential	655	30
Parkside Dr. SE	47th Ave. SE	45th Ave. SE	85	85	86	88	89	Residential	900	29
Parkside Dr. SE	Yelm Hwy. SE	56th Ave. SE	85	85	87	88	88	Collector	830	18
Parkside Dr. SE	56th Ave. SE	53rd Ave. SE	89	89	90	91	91	Collector	675	20
Parkside Dr. SE	53rd Ave. SE	49th Ave. SE	99	100	100	100		Residential	980	34
Parquet Way SE	Ruddell Rd. SE	66th Way SE	97	97	98	100	100	Residential	970	34
Pattison Lake Dr. SE	Rumac St. SE	End of Road	69	70	71	72	73	Residential	1140	19
Pavilion Way NE	Vashon Dr. NE	Trail Crossing	88	88	89	89	89	Residential	330	31
Pennsylvania St. SE	Ruddell Rd. SE	Colorado St. SE	86	88	88	89	89	Residential	975	30
Pennsylvania St. SE	Colorado St. SE	Delaware St. SE	88	87	89	89	89	Residential	860	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Periwinkle Lp. NE	Campus Glen Dr. NE	Campus Park Dr. NE	88	88	87	87	89	Residential	1035	31
Periwinkle Lp. NE	Periwinkle Lp. NE	Periwinkle Lp. NE	88	88	87	89	90	Residential	880	31
Pike Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	89	88	88	89	89	Residential	443	31
Pilatus Ave. SE	Steinerberg St. SE	End of Road	89	89	90	91	91	Residential	1080	31
Ponderosa St. NE	32nd Ave. NE	End of Road	100	100				Residential	635	34
Preston St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	89	89	90	91	Residential	650	31
Prism St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	87	88	88	Residential	1660	30
Prism St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Puget Meadow Lp. NE	31st Ave. NE	End of Road	95	96	96	98	100	Residential	710	34
Quail Dr. SE	45th Ave. SE	43rd Ave. SE	86	86	86	86	87	Residential	620	30
Quail Dr. SE	43rd Ave. SE	End of Road	84	84	84	86	87	Residential	560	29
Quinault Dr. NE	I-5 Corridor	Marvin Rd. NE	74	79	81	75	76	Collector	890	13
Quinault Dr. NE	Marvin Rd. NE	Queets Dr. NE	78	79	79	80	81	Collector	990	15
Radius Lp. SE	Balustrade Blvd. SE	71st Ave. SE	83	83	85	86	86	Residential	1180	34
Radius Lp. SE	71st Ave. SE	Bailey St. SE	85	85	85	86	85	Residential	1590	29
Radius Lp. SE	Bailey St. SE	Balustrade Blvd. SE	85	85	88	88	88	Residential	1300	29
Rainier Lp. SE	Yelm Hwy. SE	Chardonnay Dr. SE	80	80	80	79	82	Collector	520	16
Rainier Lp. SE	Chardonnay Dr. SE	Beckonridge Ln. SE	82	82	82	83	84	Collector	750	17
Rainier Lp. SE	Beckonridge Ln. SE	Rainier Rd. SE	80	80	80	81	84	Collector	620	16
Rainier Rd. SE	Southern City Limits	70th Way SE	74	75	77	79	81	Arterial	1680	16
Rainier Rd. SE	70th Way SE	Balustrade Blvd. SE	75	78	82	83	83	Arterial	760	17
Rainier Rd. SE	Balustrade Blvd. SE	66th Ave. SE	75	78	80	81	81	Arterial	600	17
Rainier Rd. SE	City Limits	Rainier Lp. SE	80	81	81	82	84	Arterial	810	22
Rainier Rd. SE	Rainier Lp. SE	Yelm Hwy. SE	80	80	80	81	83	Arterial	650	22
Raptor Ave. NE	Eagle Dr. NE	End of Road	92	93	93	95	95	Residential	980	33
Red Cedar Ct. SE	37th Ave. SE	End of Road	86	87	87	88	88	Residential	260	30
Ridgefield Ave. NE	Orcas St. NE	Orcas Lp. NE	89	89	89	90	91	Residential	590	31
Rigi St. SE	Pilatus Ave. SE	Steinerberg St. SE	89	91	91	92	93	Residential	490	31
River Ridge Dr. SE	Martin Way E.	End of Road (gate)	79	81	81	81	83	Residential	720	25
Robbins St. SE	03rd Ave. SE	End of Road	82	83	85	85	85	Residential	350	32
Rochelle St. SE	Helena Ave. SE	Natalee Dr. SE	92	92	93	95	95	Residential	1000	33
Rohr Ct. SE	Southlake Dr. SE	End of Road	92	93	93	93	95	Residential	250	33
Rosemont Ct. SE	Mullen Rd. SE	End of Road	86	87	87	86	86	Residential	300	30
Rossberg St. SE	Pilatus Ave. SE	Zermatt St. SE	89	89	89	90	90	Residential	780	31
ROUNDAABOUT 01	Marvin Rd. NE	Britton Pkwy. NE	95	96	96	100	100	Arterial	440	29
ROUNDAABOUT 02	Marvin Rd. NE	Main St. NE	100	53	53	55	57	Arterial	410	25
ROUNDAABOUT 03	Quinault Dr. NE	Galaxy Dr. NE	78	80	80	80	81	Collector	320	15
ROUNDAABOUT 04	College St. SE	45th Ave. SE	99	100	70	70	71	Arterial	370	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
ROUNDAABOUT 05	Pacific Ave. SE	Golf Club Rd. SE	78	79	78	80	81	Arterial	600	18
ROUNDAABOUT 06	Pacific Ave. SE	Homann Dr. SE	76	77	78	80	83	Arterial	540	21
ROUNDAABOUT 07	Marvin Rd. NE	Hawks Prairie Rd. NE	51	58	58	58	59	Arterial	360	7
ROUNDAABOUT 08	Meridian Rd. NE	Orion Dr. NE	100	47	56	59	61	Collector	350	24
ROUNDAABOUT 09	Parkside Dr. SE	53rd Ave. SE	87	87	89	90	90	Collector	350	19
ROUNDAABOUT 10	Rainier Rd. SE	Balustrade Blvd. SE	77	77	78	79	81	Arterial	410	21
ROUNDAABOUT 11	Columbia Way NE	Vashon Dr. NE	86	86	89	90	92	Collector	270	18
ROUNDAABOUT 12	Britton Pkwy. NE	Gateway Blvd. NE	81	81	81	83	85	Arterial	470	24
ROUNDAABOUT 13	Marvin Rd. NE	41st Ave. NE	95	95	95	95	98	Arterial	270	25
ROUNDAABOUT 14	Willamette Dr. NE	31st Ave. NE	91	95	97	97	99	Arterial	370	32
ROUNDAABOUT 15	Hogum Bay Rd. NE	Willamette Dr. NE	95	98	100	100		Arterial	440	25
ROUNDAABOUT 16	College St. SE	22nd St. SE	100					Arterial	440	25
Roxanna Ct. SE	Roxanna Lp. SE	End of Road	89	89	89	89	89	Residential	320	31
Roxanna Dr. SE	Intelco Lp. SE	Roxanna Lp. SE	89	89	89	89	89	Residential	500	31
Roxanna Lp. SE	Roxanna Dr. SE	Roxanna Dr. SE	89	89	89	89	89	Residential	1290	31
Royal St. SE	Sleater Kinney Rd. SE	End of Road	68	71	72	74	78	Collector	180	11
Royce Ct. NE	Mercedes Dr. NE	End of Road	78	80	80	80	81	Residential	220	25
Ruddell Lp. SE	Ruddell Rd. SE	34th Ave. SE	85	85	85	89	91	Residential	810	34
Ruddell Lp. SE	34th Ave. SE	Ruddell Rd. SE	76	76	87	91	93	Residential	660	22
Ruddell Rd. SE	66th Ave. SE	Yelm Hwy. SE	74	74	75	78	78	Collector	1640	13
Ruddell Rd. SE	Yelm Hwy. SE	54th Ave. SE	89	87	87	91	93	Arterial	1310	32
Ruddell Rd. SE	54th Ave. SE	50th Ave. SE	90	91	92	93	95	Arterial	990	28
Ruddell Rd. SE	50th Ave. SE	Rainier Vista Park	86	91	92	93	95	Arterial	790	28
Ruddell Rd. SE	Rainier Vista Park	45th Ave. SE	88	91	92	93	95	Arterial	900	31
Ruddell Rd. SE	45th Ave. SE	Mullen Rd. SE	86	87	89	91	95	Arterial	720	28
Ruddell Rd. SE	Mullen Rd. SE	39th Ave. SE	88	89	91	93	95	Arterial	1110	30
Ruddell Rd. SE	39th Ave. SE	Ruddell Lp. SE	88	89	91	93	95	Arterial	950	30
Ruddell Rd. SE	Ruddell Lp. SE	Ruddell Lp. SE	90	91	92	93	95	Arterial	1270	28
Ruddell Rd. SE	Ruddell Lp. SE	30th Ave. SE	88	91	92	93	95	Arterial	810	30
Ruddell Rd. SE	30th Ave. SE	27th Ave. SE	90	89	91	93	95	Arterial	1200	28
Ruddell Rd. SE	27th Ave. SE	25th Ave. SE	90	91	92	93	95	Arterial	590	28
Ruddell Rd. SE	25th Ave. SE	22nd Ave. SE	88	89	91	91	95	Arterial	980	30
Ruddell Rd. SE	22nd Ave. SE	Gemini St. SE	90	91	92	93	95	Arterial	1080	28
Ruddell Rd. SE	Gemini St. SE	15th Ave. SE	88	89	92	93	94	Arterial	1280	30
Ruddell Rd. SE	15th Ave. SE	Lacey Blvd. SE	86	89	91	92	94	Arterial	690	28
Ruddell Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	90	91	92	93	95	Arterial	840	28
Ruddell Rd. SE	Yelm Hwy. SE	Yelm Hwy. SE	81	84	86	87	84	Arterial	1070	23
Ruddell Rd. SE	Balustrade Blvd. SE	66th Ave. SE	91	91	93	93	89	Residential	830	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Rumac St. SE	Pattison Lake Dr. SE	End of Road	81	81	82	82	84	Residential	1160	27
Rushmore Ave. NE	Rushmore Way NE	Cashmere Dr. NE	89	88	87	87	88	Residential	999	31
Rushmore Ave. NE	Crestone St. NE	Rushmore Way NE	88	88	88	89	89	Residential	368	31
Rushmore Way NE	Crestone St. NE	Rushmore Ave. NE	88	88	88	88	89	Residential	368	31
Rustin Ct. SE	Komachin Lp. SE	End of Road	82	82	86	87	87	Residential	160	27
Ryan St. SE	39th Ave. SE	37th Ave. SE	80	84	85	74	77	Residential	770	26
Sadie St. NE	33rd Way NE	34th Ave. NE	91	91	92	93	93	Residential	400	32
Saga St. NE	Svea Ct. NE	End of Road	95	96	96	100	100	Residential	110	34
San Juan St. NE	Camano Lp. NE	Camano Lp. NE	90	91	92	92	93	Residential	460	32
Sandstone Ave. SE	Maricite St. SE	Shale St. SE	89	89	90	90	91	Residential	490	31
Sandstone Ave. SE	Shale St. SE	Galena St. SE	89	89	89	90	90	Residential	480	31
Santis Lp. SE	Rossberg St. SE	Zermatt St. SE	87	89	87	88	89	Residential	910	30
Saratoga Pl. NE	Midway Dr. NE	End of Road	92	93	93	93	95	Residential	110	33
Sarazen St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	680	30
Sebastian Dr. NE	Hanna Ct. NE	Christa Dr. NE	90	91	88	89	91	Residential	1110	32
Selma St. SE	Pacific Ave. SE	End of Road	25	27	29	30	30	Residential	520	0
Sentinel Dr. NE	Marietta Ct. NE	Vashon Dr. NE	89	89	93	93	93	Residential	805	32
Seville Dr. SE	47th Ave. SE	45th Ave. SE	90	90	86	88	89	Residential	670	32
Seville Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	88	88	89	Residential	1140	31
Shady Lane Rd. SE	Lilac St. SE	Trillium St. SE	97	98	98	100	100	Collector	330	24
Shady Lane Rd. SE	Trillium St. SE	Shadywood Ct. SE	97	98	98	100	100	Collector	1730	24
Shady Lane Rd. SE	Shadywood Ct. SE	Sierra Dr. SE	97	98	98	100	100	Collector	940	24
Shady Lane Rd. SE	Sierra Dr. SE	Carpenter Rd. SE	96	96	97	100	100	Collector	780	23
Shadywood Ct. SE	Shady Lane Rd. SE	End of Road	74	77	79	80	78	Residential	300	22
Shale St. SE	Sandstone Ave. SE	End of Road	89	87	90	91	91	Residential	640	31
Shale St. SE	Sandstone St. SE	Kapalea Way SE	89	89	89	90	91	Residential	410	31
Shangrila Pl. NE	Hornet Dr. NE	End of Road	91	92	93	93	95	Residential	170	32
Shepard Way NE	Dudley Dr. NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	840	33
Sheridan Dr. SE	21st Ave. SE	End of Road	89	89	89	90	90	Residential	810	35
Shirley Ct. SE	36th Ave. SE	End of Road	67	72	76	77	78	Residential	150	18
Shirley St. SE	25th Lp. SE	25th Ave. SE	86	86	87	87	89	Residential	460	34
Shirley St. SE	25th Ave. SE	22nd Ave. SE	87	87	87	88	89	Residential	990	34
Sidney St. SE	39th Ave. SE	End of Road	81	82	82	80	81	Residential	1280	27
Sierra Ct. SE	Sierra Dr. SE	End of Road	58	60	61	61	63	Residential	500	13
Sierra Dr. SE	Shady Lane Rd. SE	Sierra Ct. SE	64	65	65	66	69	Residential	1410	16
Sierra Dr. SE	Sierra Ct. SE	Carpenter Rd. SE	64	65	66	67	69	Residential	1230	16
Silver Maple Ct. SE	37th Ave. SE	End of Road	86	87	87	87	88	Residential	450	30
Sinclair Lp. NE	Vashon Dr. NE	Vashon Dr. NE	89	90	92	93	93	Residential	381	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Sleater Kinney Rd. NE	Kasey Keller Dr. NE	6th Ave. NE	83	85	84	79	80	Arterial	1320	24
Sleater Kinney Rd. NE	6th Ave. NE	15th Ave. NE	76	77	82	79	80	Arterial	1320	20
Sleater Kinney Rd. SE	Leisure Way SE	21st Ave. SE	81	81	81	81	83	Residential	1290	35
Sleater Kinney Rd. SE	21st Ave. SE	16th Ave. SE	81	80	83	83	84	Collector	1310	25
Sleater Kinney Rd. SE	16th Ave. SE	14th Ave. SE	84	84	85	85	86	Collector	1030	28
Sleater Kinney Rd. SE	14th Ave. SE	12th Ave. SE	83	83	83	82	84	Collector	1320	27
Sleater Kinney Rd. SE	12th Ave. SE	Pacific Ave. SE	75	74	78	79	80	Arterial	510	19
Sleater Kinney Rd. SE	Pacific Ave. SE	6th Ave. SE	79	80	80	80	82	Arterial	1460	22
Sleater Kinney Rd. SE	6th Ave. SE	I-5 Corridor	75	79	80	79	82	Arterial	380	19
Snowberry St. NE	Campus Meadows Lp. NE	Campus Meadows Lp. NE	87	87	89	90	91	Residential	300	30
Southlake Dr. SE	38th Ave. SE	City Limits	89	91	92	93	95	Residential	1275	31
Spartacus St. NE	Gladiator St. NE	Hanna Dr. NE	97	98	98	100	100	Residential	520	34
Spencer Ave. NE	Hepburn St. NE	Marvin Rd. NE	90	91	92	92	92	Residential	1440	32
Spokane Ct. NE	Spokane St. NE	End of Road	89	89	89	90	90	Residential	140	31
Spokane St. NE	Vashon Dr. NE	Spokane Ct. NE	88	88	88	88	89	Residential	735	31
Spokane St. NE	Spokane Ct. NE	Vashon Dr. NE	88	88	88	88	89	Residential	875	31
Spur Line Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	77	77	78	79	79	Collector	360	15
Stanfield Rd. SE	38th Dr. SE	35th Ave. SE	89	91	92	93	95	Residential	750	42
Stanfield Rd. SE	35th Ave. SE	33rd Ave. SE	89	89	91	93	94	Residential	600	42
Stanfield Rd. SE	33rd Ave. SE	Carpenter Rd. SE	89	91	91	93	95	Residential	1030	42
Steamer Dr. SE	Compton Blvd. SE	Baldwin St. SE	87	87	87	88	89	Residential	830	30
Steamer Dr. SE	Baldwin St. SE	Compton Blvd. SE	87	87	87	88	89	Residential	920	30
Steinerberg St. SE	Pilatus Ave. SE	Ingleside Dr. SE	89	90	91	91	92	Residential	650	31
Stephan Ct. SE	5th Way SE	End of Road	67	68	74	76	78	Residential	150	18
Stevens Ct. NE	Stevens Dr. NE	End of Road	86	88	89	89	90	Residential	300	38
Stevens Dr. NE	Campus Park Dr. NE	Campus Park Dr. NE	87	89	88	90	91	Residential	1400	30
Stikes Ct. SE	Stikes Dr. SE	End of Road	100	100	70	70	72	Residential	270	34
Stikes Dr. SE	47th Ave. SE	End of Road	83	83	83	85	86	Residential	490	28
Stikes Dr. SE	47th Ave. SE	45th Ave. SE	79	81	81	83	84	Residential	740	25
Stikes Dr. SE	45th Ave. SE	41st Ave. SE	74	77	77	79	81	Residential	850	22
Stikes Dr. SE	41st Ave. SE	39th Ave. SE	82	83	83	81	81	Residential	750	27
Stikes Dr. SE	39th Ave. SE	Mullen Rd. SE	77	77	77	69	70	Residential	1030	24
Stikes Dr. SE	Mullen Rd. SE	37th Ave. SE	100	100	57	57	60	Residential	750	34
Stikes Dr. SE	37th Ave. SE	34th Ave. SE	100	100	62	62	64	Residential	750	34
Stikes Dr. SE	34th Ave. SE	32nd Ave. SE	100	100	72	72	73	Residential	710	34
Stikes Dr. SE	Stikes Dr. SE	End of Road	100	100	75	75	76	Residential	190	34
Stikes Lp. SE	Stikes Dr. SE	Stikes Dr. SE	100	100	71	71	72	Residential	810	34
Stikes Woods Dr. SE	Koala St. SE	37th Ave. SE	84	85	85	85	87	Residential	310	29

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Stockton St. SE	Compton Blvd. SE	60th Ave. SE	80	80	81	83	85	Residential	790	26
Stockton St. SE	60th Ave. SE	58th Ave. SE	82	82	84	84	86	Residential	870	27
Stockton St. SE	58th Ave. SE	54th Ave. SE	81	81	81	83	83	Residential	1280	27
Stockton St. SE	54th Ave. SE	End of Road	85	86	86	87	87	Residential	300	29
Stone St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	87	88	88	Residential	1610	30
Stone St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Stonegate St. SE	45th Ave. SE	Sandstone Ave. SE	89	89	89	90	91	Residential	760	31
Stonegate St. SE	Helena Ave. SE	45th Ave. SE	89	89	89	90	90	Residential	1200	32
Strawberry Ct. SE	54th Ave. SE	End of Road	83	84	84	85	86	Residential	540	28
Sulky Dr. SE	20th Ave. SE	16th Ave. SE	66	67	69	71	72	Residential	930	17
Summerwalk St. SE	56th Ave. SE	54th Ave. SE	87	88	88	87	87	Residential	415	30
Sunset Dr. SE	Maple Hills Dr. SE	26th Ave. SE	72	79	82	84	87	Residential	740	21
Sunview Ct. SE	Crimson Ct. SE	End of Road	86	85	84	85	87	Residential	190	30
Svea Ct. NE	Burlwood St. NE	End of Road	95	96	96	99	100	Residential	500	34
Switchback Lp. SE	Compass St. SE	Compass St. SE	86	87	87	87	87	Residential	1070	30
Sycamore St. SE	25th Ave. SE	22nd Ave. SE	87	87	87	88	88	Residential	1090	30
Sycamore St. SE	22nd Ave. SE	Gemini St. SE	85	85	87	88	87	Residential	1100	37
Tanager Ct. SE	39th Ave. SE	End of Road	81	81	81	76	78	Residential	130	27
Tarawa Pl. NE	Enterprise Dr. NE	End of Road	91	91	93	93	95	Residential	390	32
Teakwood Ct. SE	41st Ave. SE	End of Road	89	89	89	90	89	Residential	460	35
Texas Ave. SE	Ruddell Rd. SE	Virginia St. SE	89	89	89	89	89	Residential	625	32
Thornbury Ct. SE	Thornbury Dr. SE	End of Road	81	83	83	84	84	Residential	520	27
Thornbury Dr. SE	Thornbury Pl. SE	57th Ave. SE	76	82	82	82	84	Residential	1450	23
Thornbury Dr. SE	57th Ave. SE	54th Ave. SE	80	80	82	83	84	Residential	750	26
Thornbury Pl. SE	61st Ave. SE	End of Road	78	78	84	84	86	Residential	440	25
Ticonderoga Pl. NE	Tarawa Pl. NE	End of Road	92	93	93	93	95	Residential	250	33
Timberline Ct. SE	Timberline Dr. SE	End of Road	87	85	85	87	87	Residential	190	34
Timberline Dr. SE	Mullen Rd. SE	Clearwater Dr. SE	89	87	87	87	88	Residential	540	35
Timberline Dr. SE	Clearwater Dr. SE	Timberline Ct. SE	83	83	83	84	85	Residential	720	39
Timberline Dr. SE	Timberline Ct. SE	41st Ave. SE	89	89	89	90	91	Residential	760	35
Timothy St. SE	Helena Ave. SE	45th Ave. SE	92	92	93	93	95	Residential	1200	33
Topaz St. SE	55th Way SE	54th Way SE	73	66	68	70	71	Residential	240	22
Traditions Ave. NE	Freemont Ave. NE	Edgewater Blvd. NE	88	88	88	88	89	Residential	575	31
Trillium St. SE	Shady Lane Rd. SE	Lacey Elementary School	97	98	99	100	100	Residential	1040	34
Twin Oaks Rd. NE	Britton Pkwy. NE	End of Road	96	97	98	99	100	Residential	730	34
Tyler Ct. SE	Komachin Lp. SE	End of Road	86	86	86	87	87	Residential	260	30
Ulery St. SE	Pacific Ave. SE	7th Ave. SE	92	94	94	96	97	Residential	1470	33
Vancouver Dr. NE	Barklay Rd. NE	Lewis Dr. NE	90	91	90	91	92	Residential	630	32

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Vancouver Dr. NE	Lewis Dr. NE	Campus Park Dr. NE	90	91	90	91	92	Residential	330	32
Vancouver Dr. NE	Campus Park Dr. NE	Stevens Dr. NE	88	91	90	91	92	Residential	420	31
Vashon Ct. NE	Waldron Dr. NE	End of Road	90	91	95	99	100	Residential	755	39
Vashon Dr. NE	41st Ave. NE	Camano Lp. NE	80	81	81	81	83	Residential	740	30
Vashon Dr. NE	Camano Lp. NE	Sinclair Lp. NE north inters.	84	87	87	89	90	Residential	925	28
Vashon Dr. NE	Sinclair Lp. NE north inters.	Columbia Wy. NE	86	87	89	89	90	Residential	900	30
Vashon Dr. NE	Columbia Wy. NE	Lopez Ct. NE	88	88	87	87	89	Collector	505	19
Vashon Dr. NE	Lopez Ct. NE	Spokane St. NE	88	88	87	87	89	Collector	560	19
Vashon Dr. NE	Spokane St. NE	Pavilion Way NE	86	86	85	85	87	Collector	770	18
Vashon Dr. NE	Pavilion Way NE	Cypress Lp. NE	89	89	88	88	87	Collector	740	20
Vashon Dr. NE	Cypress Lp. NE	Meriwood Dr. NE	89	89	88	88	89	Residential	1620	31
Vashon Dr. NE	Meriwood Dr. NE	Herron St. NE	89	89	93	94	98	Residential	575	37
Vashon Dr. NE	Herron St. NE	Waldron Dr. NE	95	95	96	98	100	Residential	1065	34
Vermont Ave. SE	Ruddell Rd. SE	Pennsylvania St. SE	84	86	88	89	89	Residential	630	35
Vincent Ct. SE	57th Ave. SE	End of Road	83	83	83	85	86	Residential	320	28
Violet St. SE	14th Ave. SE	Lacey Blvd. SE	83	83	84	84	86	Residential	580	39
Virginia St. SE	66th Ave. SE	Yelm Hwy. SE	84	84	86	87	89	Residential	1300	35
Wade Ct. SE	Komachin Lp. SE	End of Road	84	84	86	87	87	Residential	390	29
Waldron Ct. NE	Waldron Dr. NE	End of Road	100	100				Residential	270	34
Waldron Dr. NE	Vashon Dr. NE	End of Road	95	94	96	98	100	Residential	1050	34
Waldron Dr. NE	5327 Waldron Dr. NE	56th Ave. NE	100	100				Residential	2155	34
Wallaby Ct. SE	39th Ave. SE	End of Road	81	81	81	77	77	Residential	140	27
Webb St. SE	Pacific Ave. SE	End of Road	60	62	64	61	62	Residential	410	14
Webster Dr. NE	Lanyard Dr. NE	End of Road	89	89	90	91	91	Residential	1300	31
Wellington Lp. SE	Stikes Dr. SE	Stikes Dr. SE	75	76	76	77	77	Residential	620	23
Western Pkwy. NE	Britton Pkwy. NE	End of Road	95	95	96	99	100	Residential	420	34
Westlake Dr. SE	21st Ave. SE	End of Road	100	100	100	91	92	Residential	1820	34
Westminster Ct. NE	Westminster Dr. NE	End of Road	56	58	61	64	66	Residential	260	12
Westminster Dr. NE	7th Ave. NE	End of Road	44	45	51	53	55	Residential	1020	7
Whidbey Rd. NE	41st Ave. NE	Bainbridge Lp. NE	87	88	88	88	89	Residential	390	30
White Fir Dr. NE	Fairhill Dr. NE	Meridian Rd. NE	47	50	50	52	55	Residential	1580	8
White Top Ave. NE	White Fir Dr. NE	West End of Road	59	60	60	61	64	Residential	180	14
White Top Ave. NE	White Fir Dr. NE	East End of Road	60	63	64	65	67	Residential	180	15
Whitney Ave. NE	Edgewater Blvd. NE	Cashmere Dr. NE	89	89	89	89	90	Residential	650	31
Wildspitz St. SE	Santis Lp. SE	Zermatt St. SE	86	90	90	91	93	Residential	430	30
Willamette Dr. NE	Marvin Rd. NE	Hogum Bay Rd. NE	70	74	75	72	74	Arterial	1460	15
Willamette Dr. NE	Hogum Bay Rd. NE	Zenith Ct. NE	71	72	71	71	72	Arterial	1420	15
Willamette Dr. NE	Zenith Ct. NE	Commerce Place Dr. NE	73	73	78	80	82	Arterial	740	16

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Willamette Dr. NE	Commerce Place Dr. NE	Borealis Dr. NE	75	75	75	78	81	Arterial	1330	17
Willamette Dr. NE	Borealis Dr. NE	Orion Dr. NE	72	74	77	80	83	Arterial	1220	15
Willamette Dr. NE	Orion Dr. NE	31st Ave. NE	80	80	81	83	84	Arterial	870	19
Willamette Dr. NE	31st Ave. NE	Campus Glen Dr. NE	76	77	80	82	84	Arterial	2180	17
Willamette Dr. NE	Campus Glen Dr. NE	Campus Green Dr. NE	80	81	82	84	84	Arterial	2450	19
Willamette Dr. NE	Campus Green Dr. NE	Meriwood Dr. NE	81	81	83	86	86	Arterial	590	20
Willow St. SE	14th Ave. SE	End of Road	90	91	91	92	92	Residential	650	36
Willow St. SE	14th Ave. SE	Lacey Blvd. SE	84	85	85	85	85	Residential	1080	41
Wilshire Ct. SE	End of Road	End of Road	74	72	72	72	74	Residential	450	22
Windham Ct. NE	Cameron Dr. NE	End of Road	89	89	89	89	90	Residential	720	31
Woodland Square Lp. SE	College St. SE	7th Ave. SE	76	76	78	79	79	Residential	1820	23
Woodland Square Lp. SE	7th Ave. SE	6th Ave. SE	78	78	78	79	81	Residential	1750	25
Yelm Hwy. SE	Western City Limits	Corporate Center Dr. SE	100	100	77	77	77	Arterial	1190	29
Yelm Hwy. SE	Corporate Center Dr. SE	College St. SE	100	100	77	77	77	Arterial	1360	29
Yelm Hwy. SE	College St. SE	Sarazen St. SE	100	100	76	76	78	Arterial	940	29
Yelm Hwy. SE	Mt. Olympus St. SE	Ruddell Rd. SE	100	100	78	78	78	Arterial	960	29
Yelm Hwy. SE	Compton Blvd. SE	Southern City Limits	81	81	83	80	81	Arterial	700	20
Yelm Hwy. SE	Sarazen St. SE	Mt. Green Ln. SE	100	100	76	76	78	Arterial	1110	29
Yelm Hwy. SE	Mt. Green Ln. SE	Mt. Olympus St. SE	100	100	78	78	78	Arterial	930	29
Yelm Hwy. SE	Ruddell Rd. SE	Virginia St. SE	83	86	88	86	87	Arterial	950	21
Yelm Hwy. SE	Virginia St. SE	Compton Blvd. SE	77	82	88	86	84	Arterial	1160	18
Yonkers Dr. SE	Hanover Dr. SE	Clearbrook Dr. SE	89	89	87	89	89	Residential	930	31
Zenith Ct. NE	Willamette Dr. NE	End of Road	84	82	81	85	86	Residential	290	28
Zermatt St. SE	Ingleside Dr. SE	37th Ave. SE	85	85	83	84	86	Residential	840	29

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
22nd Ave. SE	Golf Club Rd. SE	College St. SE	100	87	87	88	88	Collector	1270	30
31st Ave. NE	Marvin Rd. NE	Hogum Bay Rd. NE	100	100				Collector	3300	24
ROUNDAABOUT 08	Meridian Rd. NE	Orion Dr. NE	100	47	56	59	61	Collector	350	24
ROUNDAABOUT 02	Marvin Rd. NE	Main St. NE	100	53	53	55	57	Arterial	410	25
College St. SE	22nd Ave. SE	18th Ave. SE	100	78	78	80	81	Arterial	1110	29
College St. SE	25th Ave. SE	22nd Ave. SE	100	78	78	79	79	Arterial	830	29
College St. SE	39th Ave. SE	37th Ave. SE	100	100	78	78	79	Arterial	1210	29
Marvin Rd. NE	I-5 Corridor	Main St. NE	100	70	70	73	79	Arterial	1040	14
College St. SE	45th Ave. SE	39th Ave. SE	100	100	76	76	77	Arterial	1320	29
Meridian Rd. NE	Campus Park Dr. NE	39th Lp. NE	100	67	69	69	69	Collector	1570	24
Meridian Rd. NE	39th Lp. NE	46th Ave. NE	100	43	49	50	51	Collector	3640	24
Yelm Hwy. SE	College St. SE	Sarazen St. SE	100	100	76	76	78	Arterial	940	29
College St. SE	Yelm Hwy. SE	Corporate Center Dr. SE	100	100	79	79	80	Arterial	1500	29
Yelm Hwy. SE	Mt. Green Ln. SE	Mt. Olympus St. SE	100	100	78	78	78	Arterial	930	29
Yelm Hwy. SE	Sarazen St. SE	Mt. Green Ln. SE	100	100	76	76	78	Arterial	1110	29
ROUNDAABOUT 16	College St. SE	22nd St. SE	100					Arterial	440	25
Meridian Rd. NE	31st Ave. NE	Campus Park Dr. NE	100	67	69	70	70	Collector	1330	24
Yelm Hwy. SE	Mt. Olympus St. SE	Ruddell Rd. SE	100	100	78	78	78	Arterial	960	29
Yelm Hwy. SE	Corporate Center Dr. SE	College St. SE	100	100	77	77	77	Arterial	1360	29
Yelm Hwy. SE	Western City Limits	Corporate Center Dr. SE	100	100	77	77	77	Arterial	1190	29
College St. SE	Corporate Center Dr. SE	50th Ave. SE	100	100	82	82	82	Arterial	700	29
College St. SE	50th Ave. SE	45th Ave. SE	100	100	82	82	83	Arterial	1640	29
ROUNDAABOUT 04	College St. SE	45th Ave. SE	99	100	70	70	71	Arterial	370	25
Hoh St. SE	Litt Dr. SE	End of Road	98	99	100	100		Collector	680	24
Litt Dr. SE	Hoh St. SE	End of Road	98	99	100	100		Collector	1300	24
Shady Lane Rd. SE	Shadywood Ct. SE	Sierra Dr. SE	97	98	98	100	100	Collector	940	24
Shady Lane Rd. SE	Trillium St. SE	Shadywood Ct. SE	97	98	98	100	100	Collector	1730	24
Shady Lane Rd. SE	Lilac St. SE	Trillium St. SE	97	98	98	100	100	Collector	330	24
Gerald St. SE	Martin Way E	Litt Dr. SE	97	99	100	100		Collector	420	24
Lilac St. SE	25th Ave. SE	Lacey Elementary School	97	97	99	100	100	Collector	1290	24
03rd Ave. SE	I-5 Corridor	College St. SE	96	97	97	97	100	Arterial	1280	29
Hogum Bay Rd. NE	30th Ave. NE	31st Ave. NE	96	99	100	100	37	Arterial	830	25
Hogum Bay Rd. NE	Williamette Dr. NE	28th Ct. NE	96	99	100	100	29	Arterial	810	25
Hogum Bay Rd. NE	Marvin Rd. NE	Williamette Dr. NE	96	99	100	100	37	Arterial	1420	25
Hercules Dr. NE	Atlas Ave. NE	31st St. NE	96	97	98	99	100	Collector	1260	23
Golf Club Rd. SE	6th Ave. SE	3rd Ave. SE	96	97	97	98	100	Collector	770	23
Marvin Rd. NE	Britton Pkwy. NE	29th Ave. NE	96	97	98	100	100	Arterial	1550	25
Hogum Bay Rd. NE	28th Ct. NE	30th Ave. NE	96	99	100	100	35	Arterial	1250	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Shady Lane Rd. SE	Sierra Dr. SE	Carpenter Rd. SE	96	96	97	100	100	Collector	780	23
Hercules Dr. NE	Campus Glen Dr. NE	Atlas Ave. NE	95	95	96	98	100	Collector	530	23
Corporate Center Dr. SE	Intelco Lp. SE	Intelco Lp. SE	95	96	96	98	100	Collector	1100	30
ROUNDAABOUT 13	Marvin Rd. NE	41st Ave. NE	95	95	95	95	98	Arterial	270	25
ROUNDAABOUT 15	Hogum Bay Rd. NE	Willamette Dr. NE	95	98	100	100		Arterial	440	25
Corporate Center Dr. SE	Yelm Hwy. SE	Intelco Lp. SE	95	96	96	98	100	Collector	470	30
Birdseye Ave. NE	Gateway Blvd. NE	Fiddleback St. NE	95	95	94	93	100	Collector	1110	23
Corporate Center Dr. SE	Intelco Lp. SE	College St. SE	95	96	96	98	100	Collector	910	30
Birdseye Ave. NE	Fiddleback St. NE	End of Road	95	95	96	98	100	Collector	625	23
ROUNDAABOUT 01	Marvin Rd. NE	Britton Pkwy. NE	95	96	96	100	100	Arterial	440	29
Hoh St. SE	Martin Way E	Litt Dr. SE	94	94	94	94	93	Collector	1090	23
Meridian Rd. NE	Orion Dr. NE	Helen Ave. NE	94	91	91	93	94	Collector	1000	23
Gateway Blvd. NE	Britton Pkwy. NE	Birdseye Ave. NE	93	94	95	96	100	Collector	520	27
Marvin Rd. NE	41st Ave. NE	44th Ave. NE	93	93	95	95	98	Arterial	2200	25
Marvin Rd. NE	44th Ave. NE	Northern City Limits	93	93	95	95	98	Arterial	990	25
Meridian Rd. NE	Helen Ave. NE	White Fir Dr. NE	92	93	95	96	97	Collector	1980	27
Meridian Rd. NE	White Fir Dr. NE	31st Ave. NE	92	93	95	96	97	Collector	1230	27
ROUNDAABOUT 14	Willamette Dr. NE	31st Ave. NE	91	95	97	97	99	Arterial	370	32
21st Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	91	91	93	58	60	Collector	1280	29
Main St. NE	Gateway Bvd. NE	East End of Road	91	91	91	92	93	Arterial	400	24
Main St. NE	Marvin Rd. NE	End of Road	91	94	94	95	95	Arterial	1200	24
Main St. NE	Gateway Bvd. NE	West End of Road	91	91	91	91	91	Collector	440	21
Ruddell Rd. SE	54th Ave. SE	50th Ave. SE	90	91	92	93	95	Arterial	990	28
Ruddell Rd. SE	30th Ave. SE	27th Ave. SE	90	89	91	93	95	Arterial	1200	28
Ruddell Rd. SE	27th Ave. SE	25th Ave. SE	90	91	92	93	95	Arterial	590	28
Ruddell Rd. SE	22nd Ave. SE	Gemini St. SE	90	91	92	93	95	Arterial	1080	28
Carpenter Rd. SE	5th Way SE	City Limits	90	91	92	93	95	Arterial	1010	24
Ruddell Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	90	91	92	93	95	Arterial	840	28
Ruddell Rd. SE	Ruddell Lp. SE	Ruddell Lp. SE	90	91	92	93	95	Arterial	1270	28
Parkside Dr. SE	56th Ave. SE	53rd Ave. SE	89	89	90	91	91	Collector	675	20
53rd Ave. SE	Boardwalk St. SE	Parkside Dr. SE	89	89	89	89	89	Collector	455	20
Ruddell Rd. SE	Yelm Hwy. SE	54th Ave. SE	89	87	87	91	93	Arterial	1310	32
Columbia Way NE	Edgewater Bvd. NE	Cashmere Dr. NE	89	91	93	93	95	Collector	790	24
Columbia Way NE	Cashmere Dr. NE	Vashon Dr. NE	89	91	93	93	95	Collector	900	24
Vashon Dr. NE	Pavilion Way NE	Cypress Lp. NE	89	89	88	88	87	Collector	740	20
22nd Ave. SE	College St. SE	Judd St. SE	89	87	87	85	85	Collector	1280	28
Columbia Way NE	Marvin Rd. NE	Edgewater Bvd. NE	89	91	93	93	95	Collector	920	24
Carpenter Rd. SE	6th Ave. SE	5th Way SE	88	91	92	93	95	Arterial	840	23

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Carpenter Rd. SE	Pacific Ave. SE	City Limits	88	91	92	93	95	Arterial	680	23
Ruddell Rd. SE	Rainier Vista Park	45th Ave. SE	88	91	92	93	95	Arterial	900	31
Vashon Dr. NE	Lopez Ct. NE	Spokane St. NE	88	88	87	87	89	Collector	560	19
Vashon Dr. NE	Columbia Wy. NE	Lopez Ct. NE	88	88	87	87	89	Collector	505	19
Ruddell Rd. SE	Gemini St. SE	15th Ave. SE	88	89	92	93	94	Arterial	1280	30
Ruddell Rd. SE	25th Ave. SE	22nd Ave. SE	88	89	91	91	95	Arterial	980	30
Ruddell Rd. SE	Ruddell Lp. SE	30th Ave. SE	88	91	92	93	95	Arterial	810	30
Ruddell Rd. SE	39th Ave. SE	Ruddell Lp. SE	88	89	91	93	95	Arterial	950	30
Ruddell Rd. SE	Mullen Rd. SE	39th Ave. SE	88	89	91	93	95	Arterial	1110	30
Abbey Way SE	College St. SE	Baran Dr. SE	88	88	88	88	88	Collector	460	19
Mullen Rd. SE	Funeral Home Entrance	Timberline HS Access Rd	87	86	86	87	87	Arterial	910	22
ROUNDAABOUT 09	Parkside Dr. SE	53rd Ave. SE	87	87	89	90	90	Collector	350	19
Britton Pkwy. NE	Gateway Blvd. NE	Marvin Rd. NE	87	87	87	87	90	Arterial	3600	26
Ruddell Rd. SE	50th Ave. SE	Rainier Vista Park	86	91	92	93	95	Arterial	790	28
53rd Ave. SE	College St. SE	Boardwalk St. SE	86	87	87	89	89	Collector	980	18
Pacific Ave. SE	Bowker St. SE	Lacey St. SE	86	85	85	87	88	Arterial	700	26
Ruddell Rd. SE	45th Ave. SE	Mullen Rd. SE	86	87	89	91	95	Arterial	720	28
45th Ave. SE	Western City Limits	Seville Dr. SE	86	86	85	87	87	Collector	970	18
31st Ave. NE	Deni Dr. NE	Meridian Rd. NE	86	87	91	93	94	Collector	1820	19
Vashon Dr. NE	Spokane St. NE	Pavilion Way NE	86	86	85	85	87	Collector	770	18
ROUNDAABOUT 11	Columbia Way NE	Vashon Dr. NE	86	86	89	90	92	Collector	270	18
22nd Ave. SE	Judd St. SE	Ruddell Rd. SE	86	86	89	89	89	Collector	1260	27
Ruddell Rd. SE	15th Ave. SE	Lacey Blvd. SE	86	89	91	92	94	Arterial	690	28
Parkside Dr. SE	Yelm Hwy. SE	56th Ave. SE	85	85	87	88	88	Collector	830	18
Golf Club Rd. SE	22nd Ave. SE	19th Ave. SE	85	85	87	89	89	Collector	820	26
Golf Club Rd. SE	19th Ave. SE	16th Ave. SE	85	85	85	87	89	Collector	820	26
14th Ave. SE	Western City Limits	Sleater Kinney Rd. SE	85	85	86	87	87	Collector	1300	29
Mullen Rd. SE	Stikes Dr. SE	Park Place Dr. SE	85	85	87	89	90	Arterial	1170	28
Mullen Rd. SE	Timberline HS Access Rd	Lakes Elem. Exit	85	88	88	89	89	Arterial	690	22
Sleater Kinney Rd. SE	16th Ave. SE	14th Ave. SE	84	84	85	85	86	Collector	1030	28
54th Ave. SE	Ruddell Rd. SE	Thornbury Dr. SE	84	86	86	87	86	Collector	980	20
Pacific Ave. SE	Franz St. SE	Bowker St. SE	84	83	83	87	88	Arterial	1380	25
Gateway Blvd. NE	Main St. NE	Britton Pkwy. NE	84	85	87	87	88	Collector	1575	20
Balustrade Blvd. SE	Radius Lp. SE	66th Ave. SE	84	83	85	86	88	Collector	2030	18
22nd Ave. SE	Larch St. SE	Lilac St. SE	83	84	83	82	82	Collector	1130	25
22nd Ave. SE	Ruddell Rd. SE	Larch St. SE	83	84	84	85	85	Collector	1010	25
14th Ave. SE	Golf Club Rd. SE	College St. SE	83	86	82	81	82	Collector	1300	25
45th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	83	84	84	86	87	Collector	820	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Britton Pkwy. NE	Carpenter Rd. NE	Gateway Blvd. NE	83	80	85	86	87	Arterial	4325	21
Mullen Rd. SE	College St. SE	Stikes Dr. SE	83	85	87	87	88	Arterial	1710	25
Sleater Kinney Rd. NE	Kasey Keller Dr. NE	6th Ave. NE	83	85	84	79	80	Arterial	1320	24
Pacific Ave. SE	Ruddell Rd. SE	Franz St. SE	83	83	85	85	86	Arterial	650	24
37th Ave. SE	Ingleside Dr. SE	College St. SE	83	83	85	86	86	Arterial	1300	21
41st Ave. NE	Whidbey Rd. NE	Meriwood Dr. NE	83	88	89	89	90	Arterial	1340	21
Yelm Hwy. SE	Ruddell Rd. SE	Virginia St. SE	83	86	88	86	87	Arterial	950	21
Carpenter Rd. SE	Woodland Trail Crossing	Pacific Ave. SE	83	89	92	93	95	Arterial	510	25
41st Ave. NE	Vashon Dr. NE	Whidbey Rd. NE	83	85	89	89	90	Arterial	1020	21
45th Ave. SE	College St. SE	Stikes Dr. SE	83	84	86	86	87	Collector	920	25
Lacey Blvd. SE	Alder St. SE	Lebanon St. SE	83	85	86	84	84	Arterial	910	24
Sleater Kinney Rd. SE	14th Ave. SE	12th Ave. SE	83	83	83	82	84	Collector	1320	27
Balustrade Blvd. SE	Rainier Rd. SE	Radius Lp. SE	82	85	83	85	85	Collector	720	19
04th Ave. SE	College St. SE	End of Road	82	80	83	85	85	Collector	380	16
45th Ave. SE	Seville Dr. SE	College St. SE	82	83	82	82	83	Collector	1360	17
14th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	82	80	83	82	82	Collector	1300	24
45th Ave. SE	Parkside Dr. SE	Greenbriar St. SE	82	82	83	85	87	Collector	1010	24
Carpenter Rd. NE	Gravel Ln. NE	Britton Pkwy. NE	82	82	84	84	85	Arterial	1050	24
66th Ave. SE	Sarazen St. SE	5319 66th Ave. SE	82	83	84	84	85	Collector	1840	17
Carpenter Rd. NE	City Limits	I-5 Corridor	82	75	81	83	85	Arterial	1360	24
Mullen Rd. SE	Lakes Elem. Exit	City Limits	82	82	82	83	83	Arterial	1040	25
31st Ave. NE	Hanna Ct. NE	Williamette Dr. NE	82	84	83	83	84	Collector	1740	16
Rainier Lp. SE	Chardonay Dr. SE	Beckonridge Ln. SE	82	82	82	83	84	Collector	750	17
Galaxy Dr. NE	Martin Way E	Quinault Dr. NE	81	82	82	81	83	Collector	1830	16
45th Ave. SE	Greenbriar St. SE	Ruddell Rd. SE	81	83	84	86	87	Collector	860	24
41st Ave. NE	Marvin Rd. NE	Edgewater Blvd. NE	81	83	83	87	89	Arterial	770	20
41st Ave. NE	Edgewater Blvd. NE	Vashon Dr. NE	81	85	88	90	91	Arterial	2170	20
College St. SE	Woodland Square Lp. SE	6th Ave. SE	81	82	82	82	84	Arterial	1110	23
Carpenter Rd. SE	Long Lake Park Entrance	26th Ct. SE	81	81	77	77	78	Arterial	1090	20
ROUNDAABOUT 12	Britton Pkwy. NE	Gateway Blvd. NE	81	81	81	83	85	Arterial	470	24
Mullen Rd. SE	Ruddell Rd. SE	Funeral Home Entrance	81	86	86	87	87	Arterial	910	24
Mullen Rd. SE	Park Place Dr. SE	Ruddell Rd. SE	81	87	87	87	90	Arterial	1320	23
Lacey Blvd. SE	Ruddell Rd. SE	Alder St. SE	81	81	82	80	82	Arterial	990	23
Yelm Hwy. SE	Compton Blvd. SE	Southern City Limits	81	81	83	80	81	Arterial	700	20
Ruddell Rd. SE	Yelm Hwy. SE	Yelm Hwy. SE	81	84	86	87	84	Arterial	1070	23
Willamette Dr. NE	Campus Green Dr. NE	Meriwood Dr. NE	81	81	83	86	86	Arterial	590	20
Sleater Kinney Rd. SE	21st Ave. SE	16th Ave. SE	81	80	83	83	84	Collector	1310	25
Carpenter Rd. NE	I-5 Corridor	Gravel Ln. NE	80	82	84	84	87	Arterial	1020	23

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Willamette Dr. NE	Campus Glen Dr. NE	Campus Green Dr. NE	80	81	82	84	84	Arterial	2450	19
66th Ave. SE	Rainier Rd. SE	Sarazen St. SE	80	81	81	83	83	Collector	910	16
Hogum Bay Rd. NE	31st Ave. NE	Hawks Prairie Rd. NE	80	84	86	86	52	Arterial	2170	19
Willamette Dr. NE	Orion Dr. NE	31st Ave. NE	80	80	81	83	84	Arterial	870	19
06th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	80	81	85	85	85	Collector	1280	24
Rainier Lp. SE	Yelm Hwy. SE	Chardonnay Dr. SE	80	80	80	79	82	Collector	520	16
Rainier Lp. SE	Beckonridge Ln. SE	Rainier Rd. SE	80	80	80	81	84	Collector	620	16
Rainier Rd. SE	City Limits	Rainier Lp. SE	80	81	81	82	84	Arterial	810	22
Rainier Rd. SE	Rainier Lp. SE	Yelm Hwy. SE	80	80	80	81	83	Arterial	650	22
College St. SE	I-5 Corridor	Martin Way E	79	80	80	82	84	Arterial	520	22
Pacific Ave. SE	Golf Club Rd. SE	College St. SE	79	82	84	87	88	Arterial	1160	21
Sleater Kinney Rd. SE	Pacific Ave. SE	6th Ave. SE	79	80	80	80	82	Arterial	1460	22
College St. SE	14th Ave. SE	Lacey Blvd. SE	79	81	83	78	80	Arterial	760	22
College St. SE	Lacey Blvd. SE	Pacific Ave. SE	79	81	81	81	76	Arterial	560	21
College St. SE	Pacific Ave. SE	Woodland Square Lp. SE	79	81	82	82	84	Arterial	1020	21
College St. SE	6th Ave. SE	I-5 Corridor	79	80	80	80	82	Arterial	1170	22
Pacific Ave. SE	College St. SE	Ruddell Rd. SE	79	83	83	85	86	Arterial	1300	21
Hoh St. NE	Martin Way E	City Limits	79	80	79	80	80	Collector	950	15
Hawks Prairie Rd. NE	Marvin Rd. NE	Hogum Bay Rd. NE	79	80	83	85	87	Collector	3970	17
Hawks Prairie Rd. NE	Western City Limits	Marvin Rd. NE	79	81	84	86	87	Collector	1230	15
Lacey Blvd. SE	Golf Club Rd. SE	College St. SE	79	80	80	80	83	Arterial	1365	21
Lacey Blvd. SE	College St. SE	Ruddell Rd. SE	79	80	80	80	81	Arterial	1340	21
Desmond Dr. SE	Martin Way E	End of Road	79	79	79	79	80	Collector	650	15
ROUNDAABOUT 03	Quinault Dr. NE	Galaxy Dr. NE	78	80	80	80	81	Collector	320	15
Golf Club Rd. SE	16th Ave. SE	14th Ave. SE	78	78	82	83	83	Collector	820	23
Balustrade Blvd. SE	Radius Lp. SE	Radius Lp. SE	78	78	85	87	87	Collector	2320	16
Balustrade Blvd. SE	66th Ave. SE	Yelm Hwy. SE	78	83	87	88	88	Collector	1660	16
Quinault Dr. NE	Marvin Rd. NE	Queets Dr. NE	78	79	79	80	81	Collector	990	15
Lacey Blvd. SE	Lebanon St. SE	Pacific Ave. SE	78	81	80	80	82	Arterial	910	21
Clearbrook Dr. SE	Lacey Blvd. SE	Pacific Ave. SE	78	79	80	81	82	Collector	180	23
Martin Way E	Desmond Dr. SE	Carpenter Rd. SE	78	81	90	75	77	Arterial	3270	21
Corporate Center Ct. SE	Corporate Center Dr. SE	End of Road	78	78	80	81	84	Collector	450	15
Martin Way E	City Limits	Marvin Rd. SE	78	78	78	78	79	Arterial	1440	21
ROUNDAABOUT 05	Pacific Ave. SE	Golf Club Rd. SE	78	79	78	80	81	Arterial	600	18
ROUNDAABOUT 10	Rainier Rd. SE	Balustrade Blvd. SE	77	77	78	79	81	Arterial	410	21
Martin Way E	River Ridge Dr. SE	East End of Copper Wood Apt	77	81	81			Arterial	1600	20
25th Ave. SE	Ruddell Rd. SE	Angela St. SE	77	80	82	83	84	Collector	740	21
Spur Line Rd. SE	Lacey Blvd. SE	Pacific Ave. SE	77	77	78	79	79	Collector	360	15

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
31st Ave. NE	Willamette Dr. NE	Deni Dr. NE	77	79	85	85	86	Collector	1770	14
37th Ave. SE	Western City Limits	Ingleside Dr. SE	77	78	75	75	75	Arterial	1280	18
Yelm Hwy. SE	Virginia St. SE	Compton Blvd. SE	77	82	88	86	84	Arterial	1160	18
Sleater Kinney Rd. NE	6th Ave. NE	15th Ave. NE	76	77	82	79	80	Arterial	1320	20
07th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	81	82	82	Collector	1300	14
06th Ave. SE	Golf Club Rd. SE	College St. SE	76	81	83	83	85	Collector	1280	21
ROUNDAABOUT 06	Pacific Ave. SE	Homann Dr. SE	76	77	78	80	83	Arterial	540	21
Willamette Dr. NE	31st Ave. NE	Campus Glen Dr. NE	76	77	80	82	84	Arterial	2180	17
Golf Club Rd. SE	Pacific Ave. SE	7th Ave. SE	76	77	81	73	73	Collector	1140	21
College St. SE	28th Ave. SE	25th Ave. SE	76	77	78	81	83	Arterial	1320	20
67th Ave. SE	Western City Limits	Rainier Rd. SE	75	76	76	77	79	Collector	1210	13
College St. SE	18th Ave. SE	14th Ave. SE	75	75	77	78	79	Arterial	1210	19
Rainier Rd. SE	Balustrade Blvd. SE	66th Ave. SE	75	78	80	81	81	Arterial	600	17
Sleater Kinney Rd. SE	12th Ave. SE	Pacific Ave. SE	75	74	78	79	80	Arterial	510	19
Marvin Rd. NE	29th Ave. NE	32nd Ave. NE	75	80	84	84	80	Arterial	2030	19
Sleater Kinney Rd. SE	6th Ave. SE	I-5 Corridor	75	79	80	79	82	Arterial	380	19
Pacific Ave. SE	Lacey St. SE	Carpenter Rd. SE	75	77	78	80	82	Arterial	1290	19
Rainier Rd. SE	70th Way SE	Balustrade Blvd. SE	75	78	82	83	83	Arterial	760	17
Willamette Dr. NE	Commerce Place Dr. NE	Borealis Dr. NE	75	75	75	78	81	Arterial	1330	17
College St. SE	Montclair Dr. SE	28th Ave. SE	75	77	77	80	82	Arterial	1150	19
Intelco Lp. SE	Corporate Center Dr. SE	Roxanna Dr. SE	75	77	77	79	80	Collector	1900	13
Carpenter Rd. SE	Diamond Rd. SE	Alanna Dr. SE	75	80	80	81	82	Arterial	910	19
College St. SE	37th Ave. SE	Montclair Dr. SE	74	77	77	78	77	Arterial	1480	16
Martin Way E	Hoh St. SE	River Ridge Dr. SE	74	78	81	81	81	Arterial	1420	18
Ruddell Rd. SE	66th Ave. SE	Yelm Hwy. SE	74	74	75	78	78	Collector	1640	13
Intelco Lp. SE	Roxanna Dr. SE	Corporate Center Dr. SE	74	75	77	79	80	Collector	1300	13
Martin Way E	Marvin Rd. SE	Hoh St. NE	74	79	81	81	81	Arterial	2320	18
College St. NE	6th Ave. NE	8th Ave. NE	74	74	75	78	78	Arterial	540	16
Rainier Rd. SE	Southern City Limits	70th Way SE	74	75	77	79	81	Arterial	1680	16
Quinault Dr. NE	I-5 Corridor	Marvin Rd. NE	74	79	81	75	76	Collector	890	13
Willamette Dr. NE	Zenith Ct. NE	Commerce Place Dr. NE	73	73	78	80	82	Arterial	740	16
Marvin Rd. NE	32nd Ave. NE	Hawks Prairie Rd. NE	73	77	83	83	84	Arterial	2015	17
Pacific Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	72	75	74	75	76	Arterial	1220	17
Willamette Dr. NE	Borealis Dr. NE	Orion Dr. NE	72	74	77	80	83	Arterial	1220	15
66th Ave. SE	5319 66th Ave. SE	Ruddell Rd. SE	72	71	76	71	72	Collector	1150	12
Pacific Ave. SE	Carpenter Rd. SE	Eastern City Limits	71	78	80	82	84	Arterial	620	17
Willamette Dr. NE	Hogum Bay Rd. NE	Zenith Ct. NE	71	72	71	71	72	Arterial	1420	15
Martin Way E	I-5 Corridor	Desmond Dr. SE	71	74	90	76	77	Arterial	1660	15

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Corporate Center Lp. SE	Corporate Center Dr. SE	End of public street	71	74	74	75	75	Collector	325	12
Marvin Rd. NE	Main St. NE	Britton Pkwy. NE	71	77	77	78	81	Arterial	740	15
Willamette Dr. NE	Marvin Rd. NE	Hogum Bay Rd. NE	70	74	75	72	74	Arterial	1460	15
Martin Way E	College St. SE	I-5 Corridor	70	74	79	73	75	Arterial	630	15
Marvin Rd. NE	Martin Way E	I-5 Corridor	69	69	70	74	76	Arterial	2030	14
Marvin Rd. SE	City Limits	Martin Way E	69	70	72	73	74	Arterial	980	15
Golf Club Pl. SE	7th Ave. SE	6th Ave. SE	69	73	75	75	77	Collector	480	11
25th Ave. SE	Angela St. SE	Lilac St. SE	68	67	73	76	78	Collector	870	16
Royal St. SE	Sleater Kinney Rd. SE	End of Road	68	71	72	74	78	Collector	180	11
Mullen Rd. SE	Crosswaters St. SE	Afflerbaugh Dr. SE	68	72	70	70	66	Arterial	920	14
Marvin Rd. NE	Hawks Prairie Rd. NE	41st Ave. NE	68	71	69	69	70	Arterial	1880	14
Carpenter Rd. SE	Alanna Dr. SE	Woodland Trail Crossing	68	74	75	77	78	Arterial	780	14
07th Ave. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	67	74	76	78	81	Collector	1400	15
Pacific Ave. SE	Western City Limits	Sleater Kinney Rd. SE	66	66	69	71	71	Arterial	1350	13
Carpenter Rd. SE	City Limits	Diamond Rd. SE	64	72	74	79	82	Arterial	1820	13
College St. NE	Martin Way E	Park Center Ave. NE	62	64	68	71	73	Arterial	650	11
Orion Dr. NE	Willamette Dr. NE	Meridian Rd. NE	61	67	74	78	80	Collector	4050	9
Mullen Rd. SE	Rosemount Ct. SE	Crosswaters St. SE	61	68	70	70	66	Arterial	960	11
06th Ave. NE	Sleater Kinney Rd. NE	Enterprise Dr. NE	60	62	60	61	61	Collector	1340	8
College St. NE	Park Center Ave. NE	6th Ave. NE	58	59	60	57	60	Arterial	1230	10
Lacey Blvd. SE	Sleater Kinney Rd. SE	Golf Club Rd. SE	57	58	65	66	64	Collector	1150	7
06th Ave. NE	Enterprise Dr. NE	College St. NE	56	59	60	61	63	Collector	1220	7
ROUNDAABOUT 07	Marvin Rd. NE	Hawks Prairie Rd. NE	51	58	58	58	59	Arterial	360	7
Franz St. SE	Lacey Blvd. SE	Pacific Ave. SE	49	55	56	58	59	Collector	670	7
Golf Club Rd. SE	14th Ave. SE	Lacey Blvd. SE	44	48	49	51	51	Collector	1170	4
Carpenter Rd. SE	38th Dr. SE	37th Ave. SE	40	41	41	44	45	Arterial	550	4
Carpenter Rd. SE	45th Ave. SE	41st Ave. SE	39	40	41	44	45	Arterial	1180	4
Carpenter Rd. SE	41st Ave. SE	38th Dr. SE	38	39	43	45	48	Arterial	930	3
Carpenter Rd. SE	Mullen Rd. SE	45th Ave. SE	35	35	37	38	39	Arterial	830	3
Carpenter Rd. SE	37th Ave. SE	32nd Ave. SE	34	35	36	38	41	Arterial	1510	2
31st Ave. NE	Hogum Bay Rd. NE	Hanna Ct. NE	33	34	39	41	42	Collector	1320	1
08th Ave. SE	Sleater Kinney Rd. SE	End of Road	18	19	20	21	23	Collector	600	0

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Stikes Lp. SE	Stikes Dr. SE	Stikes Dr. SE	100	100	71	71	72	Residential	810	34
Campus Glen Dr. NE	Hogum Bay Rd. NE	End of Campus Glen Develop	100					Residential	1390	34
Ponderosa St. NE	32nd Ave. NE	End of Road	100	100				Residential	635	34
25th Ave. SE	Lilac St. SE	End of Road	100	34	51	54	57	Residential	480	34
25th Lp. SE	25th Ave. SE	25th Ave. SE	100	83	83	85	87	Residential	1640	34
33rd Ct. SE	Stikes Dr. SE	West End of Road	100	100	71	71	73	Residential	320	34
Waldron Ct. NE	Waldron Dr. NE	End of Road	100	100				Residential	270	34
Waldron Dr. NE	5327 Waldron Dr. NE	56th Ave. NE	100	100				Residential	2155	34
Stikes Dr. SE	Stikes Dr. SE	End of Road	100	100	75	75	76	Residential	190	34
Stikes Dr. SE	34th Ave. SE	32nd Ave. SE	100	100	72	72	73	Residential	710	34
Stikes Dr. SE	37th Ave. SE	34th Ave. SE	100	100	62	62	64	Residential	750	34
Stikes Dr. SE	Mullen Rd. SE	37th Ave. SE	100	100	57	57	60	Residential	750	34
Westlake Dr. SE	21st Ave. SE	End of Road	100	100	100	91	92	Residential	1820	34
Lebanon St. SE	Lacey Blvd. SE	Pacific Ave. SE	100	100				Residential	345	34
56th Ave. NE	Waldon Dr. NE	Western City Limits	100	100				Residential	430	34
Stikes Ct. SE	Stikes Dr. SE	End of Road	100	100	70	70	72	Residential	270	34
Caddyshack Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	100					Residential	1870	34
33rd Ct. SE	Stikes Dr. SE	East End of Road	100	100	64	64	66	Residential	310	34
49th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	99	100	100	100		Residential	930	34
17th Ave. SE	College St. SE	East End of Road	99	99	100	54	57	Residential	970	34
Magnolia St. SE	16th Ave. SE	North End of Road	99	100	100	79	80	Residential	380	34
Magnolia St. SE	16th Ave. SE	South End of Road	99	100	100	81	82	Residential	360	34
14th Ave. SE	College St. SE	Ruddell Rd. SE	99	99	100	65	67	Residential	1300	34
Kenrick St. SE	50th Ave. SE	49th Ave. SE	99	100	100	100		Residential	470	34
Brunswick St. SE	16th Ave. SE	North End of Road	99	100	100	84	85	Residential	340	34
Parkside Dr. SE	53rd Ave. SE	49th Ave. SE	99	100	100	100		Residential	980	34
Evie St. SE	Andrew St. SE	49th Ave. SE	99	100	100	100		Residential	400	34
Brunswick St. SE	16th Ave. SE	South End of Road	99	100	100	77	79	Residential	300	34
16th Ave. SE	Sleater Kinney Rd. SE	End of Road	99	100	100	64	66	Residential	680	34
Meadow Dr. SE	Trillium St. SE	Gate	98	99	100	100		Residential	145	34
51st Way SE	Boardwalk St. SE	Andrew St. SE	98	96	96	97	98	Residential	420	34
52nd Way SE	Boardwalk St. SE	Andrew St. SE	98	96	96	97	98	Residential	415	34
Andrew St. SE	52nd Way SE	49th Ave. SE	98	97	98	99	98	Residential	720	34
19th Ave. SE	Golf Club Rd. SE	College St. SE	98	100	100	59	62	Residential	1300	34
Hanna Dr. NE	Gladiator St. NE	Hercules Dr. NE	97	99	100	100		Residential	480	34
23rd Ave. SE	Brentwood Pl. SE	25th Ave. SE	97	97	99	100	100	Residential	1150	34
Parquet Way SE	Ruddell Rd. SE	66th Way SE	97	97	98	100	100	Residential	970	34
Lakeside Dr. SE	26th Lp. SE	End of Road	97	97	98	99	100	Residential	150	38

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Spartacus St. NE	Gladiator St. NE	Hanna Dr. NE	97	98	98	100	100	Residential	520	34
Greenlawn St. SE	Brentwood Dr. SE	27th Ave. SE	97	97	98	100	100	Residential	1500	34
Judd St. SE	26th Ave. SE	25th Ave. SE	97	97	99	100	100	Residential	500	34
Detlefsen Pl. SE	24th Ave. SE	End of Road	97	97	99	100	100	Residential	240	34
26th Ave. SE	College St. SE	Judd St. SE	97	97	99	100	100	Residential	1300	34
27th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	97	97	99	100	100	Residential	850	34
27th Ave. SE	Brentwood Dr. SE	Ruddell Rd. SE	97	97	98	100	100	Residential	550	34
28th Ave. SE	Sunset Dr. SE	Brentwood Dr. SE	97	97	99	100	100	Residential	920	34
23rd Ave. SE	Judd St. SE	Brentwood Pl. SE	97	97	99	100	100	Residential	460	34
23rd Ave. SE	College St. SE	Judd St. SE	97	96	99	100	100	Residential	1280	34
Trillium St. SE	Shady Lane Rd. SE	Lacey Elementary School	97	98	99	100	100	Residential	1040	34
Judd St. SE	25th Ave. SE	24th Ave. SE	97	97	98	100	100	Residential	240	34
Brentwood Pl. SE	Brentwood Dr. SE	23rd Ave. SE	96	97	98	100	100	Residential	790	34
26th Ave. SE	Judd St. SE	Brentwood Dr. SE	96	97	98	100	100	Residential	1270	34
Gladiator St. NE	31st Ave. NE	Hanna Dr. NE	96	98	98	100	100	Residential	500	34
Brentwood Dr. SE	Wonderwood Park Entrance	28th Ave. SE	96	97	98	100	100	Residential	620	34
Brentwood Dr. SE	28th Ave. SE	26th Ave. SE	96	97	98	100	100	Residential	610	34
Boardwalk St. SE	53rd Ave. SE	49th Ave. SE	96	96	96	98	98	Residential	875	34
Brentwood Dr. SE	26th Ave. SE	26th Ave. SE	96	97	98	100	100	Residential	1320	34
Hanna Dr. NE	31st Ave. NE	Gladiator St. NE	96	98	98	100	100	Residential	850	34
Campus Glen Dr. NE	Preston St. NE	End of Campus Glen Develop	96	97	98	100	100	Residential	700	34
Twin Oaks Rd. NE	Britton Pkwy. NE	End of Road	96	97	98	99	100	Residential	730	34
Emerald St. SE	54th Ave. SE	Lake Hills St. SE	96	96	97	98	100	Residential	950	34
Burton Ray St. NE	15th Ave. NE	End of Road	96	97	98	100	100	Residential	570	34
Bogey Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	95	95	98	100	100	Residential	1420	34
Saga St. NE	Svea Ct. NE	End of Road	95	96	96	100	100	Residential	110	34
Burlwood St. NE	Birdseye Ave. NE	End of Road	95	96	96	98	100	Residential	680	34
Western Pkwy. NE	Britton Pkwy. NE	End of Road	95	95	96	99	100	Residential	420	34
24th Ave. SE	College St. SE	Judd St. SE	95	95	99	100	100	Residential	1280	34
Waldron Dr. NE	Vashon Dr. NE	End of Road	95	94	96	98	100	Residential	1050	34
Herron St. NE	Vashon Dr. NE	Waldron Dr. NE	95	95	96	98	100	Residential	975	34
Corona Ct. NE	Aurora St. NE	End of Road	95	95	95	97	98	Residential	175	34
Adonis Ave. NE	Hercules Dr. NE	Juno St. NE	95	96	96	98	100	Residential	440	34
Fiddleback St. NE	Britton Pkwy. NE	End of Road	95	96	96	98	100	Residential	825	34
Adonis Ct. NE	Juno St. NE	End of Road	95	96	96	97	100	Residential	470	34
Vashon Dr. NE	Herron St. NE	Waldron Dr. NE	95	95	96	98	100	Residential	1065	34
Juno Ct. NE	Atlas Ave. NE	End of Road	95	96	96	98	100	Residential	250	34
Juno St. NE	Adonis Ave. NE	Atlas Ave. NE	95	96	96	98	100	Residential	360	34

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Hera St. NE	Adonis Ave. NE	Atlas Ave. NE	95	96	96	98	100	Residential	360	34
Atlas Ave. NE	Hercules Dr. NE	Willamette Dr. NE	95	95	96	98	100	Residential	690	34
Svea Ct. NE	Burlwood St. NE	End of Road	95	96	96	99	100	Residential	500	34
25th Ave. SE	College St. SE	Judd St. SE	95	95	99	100	100	Residential	1280	34
Puget Meadow Lp. NE	31st Ave. NE	End of Road	95	96	96	98	100	Residential	710	34
Brentwood Dr. SE	Ruddell Rd. SE	Wonderwood Park Entrance	94	97	98	100	100	Residential	750	34
Hydra St. NE	Corona St. NE	Deni Dr. NE	93	95	95	97	98	Residential	415	33
Campus Highlands Dr. NE	Bogey Dr. NE	46th Ave. NE	93	93	95	96	98	Residential	1220	33
Meadow Lake St. SE	37th Ave. SE	Meade Ln. SE	93	93	93	95	95	Residential	480	33
Balata Ct. NE	Campus Dr. NE	End of Road	93	92	95	96	98	Residential	260	33
Campus Highlands Dr. NE	Shepard Way NE	Bogey Dr. NE	93	93	95	96	98	Residential	1020	33
Dudley Ct. NE	Shepard Way NE	End of Road	93	93	95	96	98	Residential	280	33
Dudley Dr. NE	Shepard Way NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	1370	33
Campus Highlands Dr. NE	Campus Park Dr. NE	Shepard Way NE	93	93	95	96	98	Residential	1050	33
Michael Ct. NE	Campus Park Dr. NE	End of Road	93	94	95	95	97	Residential	125	33
Malibu Ct. SE	Carmel Ln. SE	Malibu Dr. SE	93	95	95	96	98	Residential	250	33
Deni Dr. NE	Willamette Dr. NE	Nova St. NE	93	93	95	96	97	Residential	800	33
Bristonwood Dr. NE	Campus Highlands Dr. NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	670	33
Aurora St. NE	Deni Dr. NE	End of Road	93	93	95	97	99	Residential	560	33
Campus Dr. NE	Campus Park Dr. NE	Deuce Ct. NE	93	93	95	96	98	Residential	1410	33
Harrier St. NE	Eagle Lp. NE	Raptor Ave. NE	93	93	93	95	95	Residential	380	33
Malibu Dr. SE	Laguna Ln. SE	Carpenter Rd. SE	93	95	95	96	98	Residential	950	33
Campus Dr. NE	Deuce Ct. NE	Campus Highlands Dr. NE	93	93	95	96	98	Residential	1200	33
Mulligan Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	485	33
Campus Highlands Dr. NE	Cameron Dr. NE	Campus Park Dr. NE	93	92	94	95	96	Residential	655	33
Nova St. NE	Corona St. NE	Deni Dr. NE	93	95	95	97	100	Residential	415	33
Corona St. NE	Aurora St. NE	Nova St. NE	93	93	95	96	98	Residential	430	33
Deuce Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	200	33
Campus Willows Lp. NE	Willamette Dr. NE	Willamette Dr. NE	93	95	95	95	96	Residential	1150	33
Jude Ct. NE	Campus Park Dr. NE	End of Road	93	93	95	95	95	Residential	260	33
Capri Ct. NE	Campus Park Dr. NE	End of Road	93	91	95	95	95	Residential	130	33
35th Ave. SE	Meadow Lake St. SE	"Lakeview Estates" HOA	93	93	93	95	95	Residential	330	33
Earhart St. NE	Campus Park Dr. NE	Amelia Ct. NE	93	93	95	95	95	Residential	460	33
Shepard Way NE	Dudley Dr. NE	Campus Highlands Dr. NE	93	92	95	96	98	Residential	840	33
32nd Ave. SE	Impala Dr. SE	Stikes Dr. SE	93	91	91	92	93	Residential	290	37
07th Ave. SE	Ulery St. SE	Carpenter Rd. SE	93	95	95	96	97	Residential	840	33
Cedarbough Ct. NE	Campus Dr. NE	End of Road	93	93	95	96	98	Residential	190	33
07th Ave. SE	Lacey St. SE	Ulery St. SE	93	95	94	96	97	Residential	760	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Franklin Pl. NE	Forrestal Pl. NE	End of Road	93	93	93	93	95	Residential	140	33
Campus Park Dr. NE	Campus Highlands Dr. NE	Capri Ct. NE	93	95	95	95	97	Residential	1090	33
07th Ave. SE	Bowker St. SE	Lacey St. SE	93	95	95	96	97	Residential	710	33
Campus Park Dr. NE	Capri Ct. NE	Jude Ct. NE	92	92	95	95	95	Residential	340	33
37th Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	92	92	93	93	94	Residential	1300	33
Eagle Lp. NE	Raptor Ave. NE	Raptor Ave. NE	92	93	93	95	95	Residential	1520	33
18th Ave. SE	College St. SE	End of Road	92	93	93	65	69	Residential	1100	36
Essex Pl. NE	Lexington Pl. NE	End of Road	92	93	93	93	95	Residential	150	33
Campus Park Dr. NE	Jude Ct. NE	Cameron Dr. NE	92	93	95	95	95	Residential	1230	33
Colleen Ct. SE	47th Ave. SE	End of Road	92	92	92	95	95	Residential	330	33
Ulery St. SE	Pacific Ave. SE	7th Ave. SE	92	94	94	96	97	Residential	1470	33
38th Ave. SE	Stanfield Rd. SE	End of Road	92	93	93	93	95	Residential	1570	33
Raptor Ave. NE	Eagle Dr. NE	End of Road	92	93	93	95	95	Residential	980	33
Rohr Ct. SE	Southlake Dr. SE	End of Road	92	93	93	93	95	Residential	250	33
Rochelle St. SE	Helena Ave. SE	Natalee Dr. SE	92	92	93	95	95	Residential	1000	33
Timothy St. SE	Helena Ave. SE	45th Ave. SE	92	92	93	93	95	Residential	1200	33
Amelia Ct. NE	End of Road	End of Road	92	93	95	95	95	Residential	950	33
Forrestal Pl. NE	Enterprise Dr. NE	End of Road	92	92	93	93	95	Residential	920	33
Abigail Dr. NE	Campus Park Dr. NE	Campus Highlands Dr. NE	92	92	95	96	97	Residential	1100	33
Langley Pl. NE	Enterprise Dr. NE	End of Road	92	93	93	93	94	Residential	440	33
47th Ave. SE	Rochelle St. SE	Colleen Ct. SE	92	92	93	95	95	Residential	525	33
Malibu Dr. SE	Carpenter Rd. SE	Laguna Ln. SE	92	94	94	95	97	Residential	1520	33
Hornet Pl. NE	Forrestal Pl. NE	End of Road	92	92	92	92	94	Residential	260	33
Saratoga Pl. NE	Midway Dr. NE	End of Road	92	93	93	93	95	Residential	110	33
Lanier Ct. SE	38th Ave. SE	End of Road	92	93	91	93	93	Residential	585	33
Ticonderoga Pl. NE	Tarawa Pl. NE	End of Road	92	93	93	93	95	Residential	250	33
06th Ave. SE	Carpenter Rd. SE	End of Road	92	94	94	95	97	Residential	880	33
46th Ave. SE	Timothy St. SE	Colleen Ct. SE	92	92	92	94	95	Residential	300	33
Colleen St. SE	47th Ave. SE	Natalee Dr. SE	92	92	93	95	95	Residential	420	33
Helena Ave. SE	Durham St. SE	End of Road	91	91	92	93	93	Residential	900	32
Bacall St. NE	Spencer Ave. NE	38th Way NE	91	91	93	91	92	Residential	625	32
Notter St. SE	15th Ave. SE	14th Ave. SE	91	90	90	91	92	Residential	340	32
Andress St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	92	93	92	92	Residential	500	32
19th Ave. SE	Judd St. SE	Ruddell Rd. SE	91	91	91	92	93	Residential	570	32
25th Ave. SE	Brentwood Pl. SE	25th Ct. SE	91	91	91	91	93	Residential	1090	37
Bali St. NE	33rd Ave. NE	34th Ave. NE	91	91	92	93	93	Residential	575	32
Tarawa Pl. NE	Enterprise Dr. NE	End of Road	91	91	93	93	95	Residential	390	32
Hornet Dr. NE	Forrestal Pl. NE	Enterprise Dr. NE	91	92	92	92	95	Residential	470	32

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Hayworth Ave. NE	Hepburn St. NE	Bacall St. NE	91	91	91	91	92	Residential	1020	32
Hepburn St. NE	Hawks Prairie Rd. NE	End of Road	91	91	92	92	92	Residential	1300	32
Natalee Dr. SE	Durham St. SE	Colleen St. SE	91	90	92	93	93	Residential	940	32
Astaire St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	93	93	93	Residential	470	32
36th Ave. SE	Ida Jane Way SE	End of Road	91	91	92	93	95	Residential	600	37
Shangrila Pl. NE	Hornet Dr. NE	End of Road	91	92	93	93	95	Residential	170	32
Drake Ct. NE	Vancouver Dr. NE	End of Road	91	92	90	91	92	Residential	140	32
15th Ave. SE	Ruddell Rd. SE	End of Road	91	91	90	91	92	Residential	640	32
Ipsut Ct. SE	Mt. Tahoma Dr. SE	End of Road	91	91	93	87	89	Residential	530	37
Ida Jane Way SE	36th Ave. SE	35th Ave. SE	91	91	92	93	95	Residential	380	32
Durham St. SE	Helena St. SE	Natalee Dr. SE	91	90	90	90	91	Residential	990	32
36th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	91	91	92	93	95	Residential	1280	37
Mia St. NE	33rd Ave. NE	33rd Way NE	91	92	92	92	93	Residential	235	32
Ruddell Rd. SE	Balustrade Blvd. SE	66th Ave. SE	91	91	93	93	89	Residential	830	33
Abigail Ct. NE	Campus Park Dr. NE	End of Road	91	93	95	96	97	Residential	335	32
Loren St. NE	Spencer Ave. NE	Hayworth Ave. NE	91	91	91	91	92	Residential	585	32
Mowich Ct. SE	54th Ave. SE	End of Road	91	91	93	86	87	Residential	400	37
Lexington Pl. NE	Enterprise Dr. NE	End of Road	91	91	93	93	95	Residential	520	32
Clearbrook Dr. SE	Yonkers Dr. SE	Lacey Blvd. SE	91	91	91	91	93	Residential	930	32
Sadie St. NE	33rd Way NE	34th Ave. NE	91	91	92	93	93	Residential	400	32
Vancouver Dr. NE	Lewis Dr. NE	Campus Park Dr. NE	90	91	90	91	92	Residential	330	32
Vancouver Dr. NE	Barklay Rd. NE	Lewis Dr. NE	90	91	90	91	92	Residential	630	32
Vashon Ct. NE	Waldron Dr. NE	End of Road	90	91	95	99	100	Residential	755	39
20th Ave. SE	Judd St. SE	End of Road	90	90	90	91	91	Residential	630	36
Christa Dr. NE	Sebastian Dr. NE	31st Ave. NE	90	91	90	91	91	Residential	1220	32
Meriwood Dr. NE	Anderson Ct. NE	Shaw Ln. NE	90	91	95	97	98	Residential	450	42
Meriwood Dr. NE	Shaw Ln. NE	End of Road	90	91	95	97	98	Residential	1575	42
Budd Ct. NE	Stevens Dr. NE	End of Road	90	91	90	91	92	Residential	280	32
Montclair Ct. SE	Montclair Dr. SE	South End of Road	90	89	89	92	92	Residential	180	36
Willow St. SE	14th Ave. SE	End of Road	90	91	91	92	92	Residential	650	36
18th Ave. SE	Judd St. SE	Ruddell Rd. SE	90	91	89	92	93	Residential	370	32
16th Way SE	Judd St. SE	Ruddell Rd. SE	90	91	91	91	93	Residential	120	36
14th Way SE	Willow St. SE	Golf Club Rd. SE	90	91	89	92	92	Residential	490	36
Curtis Ct. SE	19th Ave. SE	End of Road	90	89	91	92	93	Residential	300	36
25th Ave. SE	Judd St. SE	Brentwood Pl. SE	90	90	90	90	91	Residential	470	36
Eld Ct. NE	Vancouver Dr. NE	South End of Road	90	91	90	91	92	Residential	290	32
Ingleside Way SE	Ingleside Dr. SE	Avonlea Dr. SE	90	90	88	88	89	Residential	250	32
San Juan St. NE	Camano Lp. NE	Camano Lp. NE	90	91	92	92	93	Residential	460	32

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Harstene St. NE	Camano Lp. NE	Camano Lp. NE	90	89	92	92	93	Residential	450	32
Hanna Ct. NE	31st Ave. NE	End of Road	90	91	88	89	91	Residential	430	32
Sebastian Dr. NE	Hanna Ct. NE	Christa Dr. NE	90	91	88	89	91	Residential	1110	32
54th Ave. SE	Mt. Tahoma Dr. SE	Ruddell Rd. SE	90	88	89	87	89	Residential	1420	36
Lewis Dr. NE	Barklay Rd. NE	Vancouver Dr. NE	90	91	90	91	92	Residential	870	32
Lackland Ct. NE	Lanyard Dr. NE	End of Road	90	90	90	91	92	Residential	200	32
Blakley Lp. NE	Vashon Dr. NE	Vashon Dr. NE	90	91	92	92	93	Residential	460	32
Deni Dr. NE	Nova St. NE	Classic Dr. NE	90	91	90	91	92	Residential	800	32
Capstan Dr. NE	Lanyard Dr. NE	Preston St. NE	90	91	90	91	91	Residential	360	32
Spencer Ave. NE	Hepburn St. NE	Marvin Rd. NE	90	91	92	92	92	Residential	1440	32
Barklay Rd. NE	Vancouver Dr. NE	Lewis Dr. NE	90	91	90	91	92	Residential	560	32
Glen Mary Dr. SE	13th Ave. SE	Alanna Dr. SE	90	90	90	91	91	Residential	1300	32
Seville Dr. SE	47th Ave. SE	45th Ave. SE	90	90	86	88	89	Residential	670	32
Kona St. NE	34th Ave. NE	Hawks Prairie Rd. NE	90	91	91	91	92	Residential	585	32
Anderson Ct. NE	Meriwood Dr. NE	End of Road	90	91	95	97	98	Residential	1550	42
Kona St. NE	33rd Way NE	34th Ave. NE	90	91	92	92	92	Residential	425	32
24th Ave. SE	Brentwood Pl. SE	23rd Ave. SE	90	91	91	92	93	Residential	720	32
Camano Lp. NE	Vashon Dr. NE	Camano Lp. NE	89	90	91	91	92	Residential	940	31
McKinley St. NE	Rushmore Ave. NE	Keystone Ave. NE	89	89	88	88	89	Residential	902	31
Kodiak Ave. NE	Freemont St. NE	Edgewater Blvd. NE	89	88	88	89	89	Residential	709	31
Christine Ct. NE	Deni Dr. NE	End of Road	89	90	88	91	92	Residential	200	31
Candlewood Dr. SE	Timberline Dr. SE	Clearwater Dr. SE	89	87	87	89	91	Residential	450	35
Lanyard Dr. NE	Webster Dr. NE	End of Road	89	89	90	91	91	Residential	2090	31
Cook Ct. NE	Stevens Dr. NE	End of Road	89	90	90	91	92	Residential	370	31
Mary Lou St. SE	Lisa Ln. SE	Cora St. SE	89	89	89	91	92	Residential	380	35
Kapalea Way SE	Nelson Rd. SE	Shale St. SE	89	89	88	90	90	Residential	560	31
Kapalea Way SE	Shale St. SE	Galena St. SE	89	89	87	88	88	Residential	550	31
Crestone St. NE	End of Road (alley)	End of Road (alley)	89	88	88	88	89	Residential	256	31
Kapalea Way SE	Ingleside Dr. SE	Nelson Rd. SE	89	88	88	90	91	Residential	700	31
Lynn Ct. NE	Deni Dr. NE	End of Road	89	90	88	91	92	Residential	400	31
Maricite St. SE	Kapalea Way SE	End of Road	89	89	89	90	91	Residential	1040	31
Keegan St. NE	Webster Dr. NE	Fortman Dr. NE	89	89	90	91	92	Residential	390	31
Keystone Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	88	88	89	Residential	489	31
Logan Dr. NE	McKinley St. NE	Keystone Ave. NE	89	89	89	89	89	Residential	893	31
McKinley Lp. NE	McKinley St. NE	McKinley St. NE	89	89	89	90	91	Residential	710	31
Kelly Ct. NE	Deni Dr. NE	End of Road	89	90	90	91	92	Residential	370	31
Cameron Dr. NE	Merrill Ct. NE	Amelia Ct. NE	89	89	89	90	90	Residential	470	31
Jeri Dr. NE	Deni Dr. NE	Deni Dr. NE	89	90	90	91	92	Residential	1400	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Citrine Ave. SE	Maricite St. SE	Shale St. SE	89	89	91	92	93	Residential	470	31
Campus Glen Dr. NE	Preston St. NE	Willamette Dr. NE	89	89	89	89	89	Residential	880	31
Josephine Ct. SE	14th Ave. SE	End of Road	89	89	89	90	90	Residential	540	31
London Lp. NE	Campus Glen Dr. NE	Madrid St. NE	89	89	89	90	90	Residential	400	31
Marietta Ct. NE	Vashon Dr. NE	End of Road	89	89	93	93	93	Residential	535	31
Southlake Dr. SE	38th Ave. SE	City Limits	89	91	92	93	95	Residential	1275	31
Sandstone Ave. SE	Shale St. SE	Galena St. SE	89	89	89	90	90	Residential	480	31
38th Way NE	Marvin Rd. NE	End of Road	89	91	92	92	92	Residential	520	31
Steinerberg St. SE	Pilatus Ave. SE	Ingleside Dr. SE	89	90	91	91	92	Residential	650	31
41st Ave. SE	Galena St. SE	College St. SE	89	89	89	90	91	Residential	180	31
Stanfield Rd. SE	33rd Ave. SE	Carpenter Rd. SE	89	91	91	93	95	Residential	1030	42
Stanfield Rd. SE	35th Ave. SE	33rd Ave. SE	89	89	91	93	94	Residential	600	42
34th Ave. NE	Bali St. NE	Kona St. NE	89	91	92	93	93	Residential	600	31
Spokane Ct. NE	Spokane St. NE	End of Road	89	89	89	90	90	Residential	140	31
33rd Way NE	Bali St. NE	Marvin Rd. NE	89	91	91	92	92	Residential	1175	31
Sinclair Lp. NE	Vashon Dr. NE	Vashon Dr. NE	89	90	92	93	93	Residential	381	31
Dominion Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	87	89	90	Residential	290	31
Sheridan Dr. SE	21st Ave. SE	End of Road	89	89	89	90	90	Residential	810	35
Shale St. SE	Sandstone St. SE	Kapalea Way SE	89	89	89	90	91	Residential	410	31
Ridgefield Ave. NE	Orcas St. NE	Orcas Lp. NE	89	89	89	90	91	Residential	590	31
Greenview Dr. NE	Cashmere Dr. NE	Columbia Way NE	89	89	89	89	90	Residential	481	31
Camano Lp. NE	Camano Lp. NE	Camano Lp. NE	89	90	91	91	92	Residential	2330	31
Stanfield Rd. SE	38th Dr. SE	35th Ave. SE	89	91	92	93	95	Residential	750	42
Vashon Dr. NE	Cypress Lp. NE	Meriwood Dr. NE	89	89	88	88	89	Residential	1620	31
Yonkers Dr. SE	Hanover Dr. SE	Clearbrook Dr. SE	89	89	87	89	89	Residential	930	31
Windham Ct. NE	Cameron Dr. NE	End of Road	89	89	89	89	90	Residential	720	31
Fairweather St. NE	End of Road (alley)	End of Road (alley)	89	88	88	88	89	Residential	370	31
Whitney Ave. NE	Edgewater Blvd. NE	Cashmere Dr. NE	89	89	89	89	90	Residential	650	31
14th Way SE	Golf Club Rd. SE	College St. SE	89	89	89	89	89	Residential	1280	35
Fortman Dr. NE	Lanyard Dr. NE	End of Road	89	89	90	91	92	Residential	1020	31
35th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	89	91	92	93	94	Residential	1150	42
Vashon Dr. NE	Meriwood Dr. NE	Herron St. NE	89	89	93	94	98	Residential	575	37
Sentinel Dr. NE	Marietta Ct. NE	Vashon Dr. NE	89	89	93	93	93	Residential	805	32
Galena St. SE	Kapalea Way SE	End of Road	89	88	89	89	90	Residential	650	31
Timberline Dr. SE	Timberline Ct. SE	41st Ave. SE	89	89	89	90	91	Residential	760	35
Timberline Dr. SE	Mullen Rd. SE	Clearwater Dr. SE	89	87	87	87	88	Residential	540	35
Texas Ave. SE	Ruddell Rd. SE	Virginia St. SE	89	89	89	89	89	Residential	625	32
Teakwood Ct. SE	41st Ave. SE	End of Road	89	89	89	90	89	Residential	460	35

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Stonegate St. SE	Helena Ave. SE	45th Ave. SE	89	89	89	90	90	Residential	1200	32
Stonegate St. SE	45th Ave. SE	Sandstone Ave. SE	89	89	89	90	91	Residential	760	31
Webster Dr. NE	Lanyard Dr. NE	End of Road	89	89	90	91	91	Residential	1300	31
Blueberry Ct. SE	47th Ave. SE	North End of Road	89	89	89	90	91	Residential	330	31
Orcas St. NE	Orcas Lp. NE	Meriwood Dr. NE	89	89	89	89	90	Residential	500	31
Sandstone Ave. SE	Maricite St. SE	Shale St. SE	89	89	90	90	91	Residential	490	31
Bend Ct. NE	Spokane St. NE	End of Road	89	89	89	89	90	Residential	275	31
Shale St. SE	Sandstone Ave. SE	End of Road	89	87	90	91	91	Residential	640	31
Denali Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	89	88	88	88	89	Residential	443	31
Dogwood St. SE	20th Ave. SE	14th Ave. SE	89	89	90	89	90	Residential	1670	31
Bainbridge Lp. NE	Whidbey Rd. NE	Jubilee Rd. NE	89	89	88	88	89	Residential	830	31
Blueberry Ct. SE	47th Ave. SE	South End of Road	89	89	89	90	91	Residential	250	31
Becket St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	89	90	91	91	Residential	570	31
Muir Ct. SE	54th Ave. SE	End of Road	89	89	91	86	86	Residential	380	35
Bretherton Ave. NE	McKinley St. NE	Cashmere Dr. NE	89	89	87	89	90	Residential	340	31
Mills Landing Ct. SE	Carpenter Rd. SE	End of Road	89	89	89	90	91	Residential	333	31
Michelle Ct. SE	41st Ave. SE	End of Road	89	89	89	89	90	Residential	230	31
Merrill Ct. NE	Cameron Dr. NE	End of Road	89	89	89	89	90	Residential	400	31
Meriwood Dr. NE	Williamette Dr. NE	Gate	89	89	89	89	89	Residential	1260	31
Davis Ct. NE	Jeri Dr. NE	End of Road	89	90	90	91	92	Residential	380	31
Rigi St. SE	Pilatus Ave. SE	Steinerberg St. SE	89	91	91	92	93	Residential	490	31
Rushmore Ave. NE	Rushmore Way NE	Cashmere Dr. NE	89	88	87	87	88	Residential	999	31
Pike Ave. NE	Fairweather St. NE	Edgewater Blvd. NE	89	88	88	89	89	Residential	443	31
Roxanna Lp. SE	Roxanna Dr. SE	Roxanna Dr. SE	89	89	89	89	89	Residential	1290	31
Roxanna Dr. SE	Intelco Lp. SE	Roxanna Lp. SE	89	89	89	89	89	Residential	500	31
Pilatus Ave. SE	Steinerberg St. SE	End of Road	89	89	90	91	91	Residential	1080	31
Roxanna Ct. SE	Roxanna Lp. SE	End of Road	89	89	89	89	89	Residential	320	31
Rossberg St. SE	Pilatus Ave. SE	Zermatt St. SE	89	89	89	90	90	Residential	780	31
Preston St. NE	Campus Glen Dr. NE	Fortman Dr. NE	89	89	89	90	91	Residential	650	31
Alabaster St. SE	Sandstone St. SE	Kapalea Way SE	89	89	90	90	91	Residential	450	31
Bainbridge Lp. NE	Whidbey Rd. NE	Whidbey Rd. NE	89	89	88	88	89	Residential	1160	31
Orcas Pl. NE	Orcas St. NE	End of Road	89	89	90	91	92	Residential	130	31
Cypress Dr. NE	Pavilion Way NE	Cypress Lp. NE	88	87	87	88	89	Residential	790	31
Cypress Lp. NE	Cypress Dr. NE	Vashon Dr. NE	88	87	89	89	89	Residential	1230	31
Columbia Way NE	Vashon Dr. NE	Mercer Ct. NE	88	88	88	88	89	Residential	550	31
Freemont St. NE	Traditions Ave. NE	Columbia Way NE	88	88	88	88	89	Residential	1336	31
Gray Ct. NE	Vancouver Dr. NE	End of Road	88	89	90	91	92	Residential	270	31
Delaware Ave. SE	Virginia St. SE	Balustrade Blvd. SE	88	88	86	87	88	Residential	1115	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Hogum Bay Ext. Rd. NE	Hogum Bay Rd. NE	Landfill Rd. NE (gate)	88	88	87	87	87	Residential	800	31
Eld Ct. NE	Vancouver Dr. NE	North End of Road	88	89	90	91	92	Residential	300	31
Ingleside Dr. SE	Kapalea Way SE	Zermatt St. SE	88	87	88	88	89	Residential	820	31
Ingleside Dr. SE	Kapalea Way SE	End of Road	88	89	88	88	89	Residential	1000	31
Indiana St. SE	Colorado Ave. SE	Delaware Ave. SE	88	88	88	89	89	Residential	660	31
Deni Dr. NE	Classic Dr. NE	31st Ave. NE	88	88	90	91	92	Residential	900	31
Fresco Dr. SE	Balustrade Blvd. SE	Breeze St. SE	88	88	88	89	89	Residential	890	31
43rd Ave. SE	Quail Dr. SE	Park Place Lp. SE	88	88	89	89	90	Residential	240	31
Bend Dr. NE	Spokane St. NE	Spokane St. NE	88	87	88	89	89	Residential	1240	31
Beam St. SE	Radius Lp. SE	70th Way SE	88	88	88	89	89	Residential	280	31
Pavilion Way NE	Vashon Dr. NE	Trail Crossing	88	88	89	89	89	Residential	330	31
Periwinkle Lp. NE	Campus Glen Dr. NE	Campus Park Dr. NE	88	88	87	87	89	Residential	1035	31
Blade St. SE	Balustrade Blvd. SE	66th Ave. SE	88	88	89	89	89	Residential	680	31
Avonlea Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	88	88	89	Residential	1140	31
Rushmore Ave. NE	Crestone St. NE	Rushmore Way NE	88	88	88	89	89	Residential	368	31
Rushmore Way NE	Crestone St. NE	Rushmore Ave. NE	88	88	88	88	89	Residential	368	31
Seville Dr. SE	45th Ave. SE	Kapalea Way SE	88	88	88	88	89	Residential	1140	31
48th Lp. SE	48th Ave. SE	48th Ave. SE	88	87	87	88	88	Residential	990	31
48th Ave. SE	Crosswaters St. SE	End of Road	88	87	87	87	87	Residential	810	31
Orcas Lp. NE	Orcas St. NE	Knuckle	88	88	89	90	91	Residential	640	40
47th Ave. SE	Seville Dr. SE	Stonegate St. SE	88	90	88	91	91	Residential	480	31
Pennsylvania St. SE	Colorado St. SE	Delaware St. SE	88	87	89	89	89	Residential	860	31
Spokane St. NE	Vashon Dr. NE	Spokane Ct. NE	88	88	88	88	89	Residential	735	31
Spokane St. NE	Spokane Ct. NE	Vashon Dr. NE	88	88	88	88	89	Residential	875	31
41st Ave. SE	Carpenter Rd. SE	Arbor Dr. SE	88	89	91	93	95	Residential	1030	39
34th Ave. SE	Stanfield Rd. SE	East End of Road	88	88	88	88	88	Residential	230	31
28th Ct. NE	Hogum Bay Rd. NE	End of Road	88	86	87	87	87	Residential	1160	31
Traditions Ave. NE	Freemont Ave. NE	Edgewater Blvd. NE	88	88	88	88	89	Residential	575	31
Vancouver Dr. NE	Campus Park Dr. NE	Stevens Dr. NE	88	91	90	91	92	Residential	420	31
19th Ave. SE	Judd St. SE	End of Road	88	88	90	91	91	Residential	630	31
17th Ave. SE	College St. SE	West End of Road	88	89	89	91	91	Residential	590	35
16th Ave. SE	College St. SE	Judd St. SE	88	88	89	91	92	Residential	1300	35
15th Ave. SE	Ruddell Rd. SE	Gemini St. SE	88	90	90	91	92	Residential	800	35
14th Ct. SE	14th Ave. SE	End of Road	88	89	88	89	89	Residential	680	31
48th Ave. SE	Rosemont Ct. SE	Crosswaters St. SE	88	87	86	87	87	Residential	790	31
Campus Green Lp. NE	Campus Green Dr. NE	Campus Green Dr. NE	88	88	88	89	89	Residential	1050	31
Cashmere Dr. NE	Rushmore Ave. NE	Columbia Way NE	88	89	88	88	89	Residential	1097	31
Cashmere Dr. NE	Dominion Ave. NE	Rushmore Ave. NE	88	89	89	89	89	Residential	1348	31

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Ken-Jan Ct. SE	Greenbriar St. SE	End of Road	88	88	89	89	89	Residential	290	31
Canton Ave. NE	Orcas St. NE	Orcas Lp. NE	88	89	89	90	91	Residential	540	40
Campus Prairie Lp. NE	31st Ave. NE	31st Ave. NE	88	88	88	89	89	Residential	1346	31
Campus Park Dr. NE	Campus Glen Dr. NE	Lewis Dr. NE	88	88	89	89	89	Residential	1500	31
Campus Park Dr. NE	Lewis Dr. NE	Meridian Dr. NE	88	88	87	87	89	Residential	750	31
Lebanon St. SE	14th Ave. SE	Lacey Blvd. SE	88	88	89	89	90	Residential	720	31
Periwinkle Lp. NE	Periwinkle Lp. NE	Periwinkle Lp. NE	88	88	87	89	90	Residential	880	31
Lewis Dr. NE	Vancouver Dr. NE	Campus Park Dr. NE	88	89	90	91	92	Residential	730	31
Oklahoma St. SE	Colorado Ave. SE	Delaware Ave. SE	88	88	88	89	89	Residential	725	31
Lopez Ct. NE	Vashon Dr. NE	End of Road	88	93	88	89	89	Residential	312	31
Lupine St. NE	Campus Glen Dr. NE	Campus Meadows Lp. NE	88	89	89	89	89	Residential	360	31
Mossy Rock Ave. NE	Orcas St. NE	Orcas Lp. NE	88	88	89	90	91	Residential	580	40
Campus Green Ct. NE	Campus Green Dr. NE	End of Road	88	89	89	88	89	Residential	190	31
Borealis Ct. NE	Williamette Dr. NE	End of Road	88	87	83	84	86	Residential	1020	31
Callison Rd. NE	Britton Pkwy. NE	End of Road	88	88	88	89	89	Residential	685	31
Breeze Dr. SE	Balustrade Blvd. SE	66th Way SE	88	88	88	89	89	Residential	1000	31
Mercer Ct. NE	Vashon Dr. NE	End of Road	88	89	89	89	89	Residential	407	31
Candlewood Ct. SE	Candlewood Dr. SE	End of Road	87	89	87	88	89	Residential	340	34
Clearwater Dr. SE	Clearwater Lp. SE	41st Ave. SE	87	87	87	88	89	Residential	1020	34
Enterprise Dr. NE	6th Ave. NE	Hornet Dr. NE	87	87	89	91	93	Residential	740	38
33rd Ave. NE	Bali St. NE	Mia St. NE	87	88	91	92	92	Residential	975	30
21st Ave. SE	Judd St. SE	End of Road	87	89	87	89	89	Residential	620	34
Colorado Ave. SE	Virginia St. SE	Pennsylvania St. SE	87	89	88	89	89	Residential	555	30
Classic Dr. NE	Deni Dr. NE	Mercedes Dr. NE	87	88	88	89	91	Residential	1020	30
Carolina St. SE	66th Ave. SE	Texas Ave. SE	87	87	89	89	89	Residential	540	30
Blackberry Ct. SE	47th Ave. SE	End of Road	87	89	89	89	91	Residential	460	30
14th Ave. SE	Alder St. SE	Lebanon St. SE	87	87	87	87	90	Residential	700	30
21st Ave. SE	Judd St. SE	Ruddell Rd. SE	87	87	87	89	89	Residential	1070	44
Campus Green Dr. NE	Campus Green Ct. NE	Meriwood Dr. NE	87	88	88	89	89	Residential	710	30
36th Ct. SE	Banbury Pl. SE	End of Road	87	87	86	87	87	Residential	430	30
Bainbridge Lp. NE	Jubilee Rd. NE	Whidbey Rd. NE	87	87	88	88	87	Residential	880	30
Chardonnay Dr. SE	Merlot Ln. SE	Rainier Lp. SE	87	88	88	88	89	Residential	1000	30
44th Ct. SE	Greenbriar St. SE	East End of Road	87	86	88	88	88	Residential	450	30
Cameron Dr. NE	Campus Highlands Dr. NE	Windham Ct. NE	87	87	87	89	89	Residential	840	30
Cameron Dr. NE	Windham Ct. NE	Merrill Ct. NE	87	87	87	89	89	Residential	1450	30
Campus Green Dr. NE	Williamette Dr. NE	Campus Green Ct. NE	87	87	85	86	88	Residential	840	30
Angela St. SE	25th Ave. SE	22nd Ave. SE	87	86	86	87	87	Residential	990	34
Dogwood St. SE	14th Ave. SE	End of Road	87	89	89	91	92	Residential	400	34

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
55th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	87	88	88	89	89	Residential	510	30
57th Lp. SE	57th Way SE	57th Way SE	87	87	88	89	89	Residential	545	30
70th Ave. SE	Radius Lp. SE	Bailey St. SE	87	87	88	88	89	Residential	1150	30
70th Way SE	Bailey St. SE	Radius Lp. SE	87	87	88	88	89	Residential	790	30
Banbury Pl. SE	37th Ave. SE	36th Ct. SE	87	87	86	87	88	Residential	290	30
Stone St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Larch St. SE	25th Ave. SE	22nd Ave. SE	87	88	88	89	89	Residential	990	34
Ingleside Lp. SE	Ingleside Dr. SE	Ingleside Dr. SE	87	88	88	89	91	Residential	940	30
Shirley St. SE	25th Ave. SE	22nd Ave. SE	87	87	87	88	89	Residential	990	34
Orcas St. NE	Orcas Lp. NE	Canton Ave. NE	87	89	89	89	90	Residential	700	38
Hawks Prairie Rd. NE	Hogum Bay Rd. NE	End of Road	87	88	91	91	92	Residential	700	39
Inlay St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Sycamore St. SE	25th Ave. SE	22nd Ave. SE	87	87	87	88	88	Residential	1090	30
Summerwalk St. SE	56th Ave. SE	54th Ave. SE	87	88	88	87	87	Residential	415	30
Greenbriar St. SE	45th Ave. SE	End of Road	87	88	88	88	88	Residential	740	30
Melody Dr. SE	Sycamore Dr. SE	22nd Ave. SE	87	87	90	91	91	Residential	510	34
Sarazen St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	680	30
McKinley St. NE	Dominion Ave. NE	Rushmore Ave. NE	87	89	87	87	89	Residential	1270	30
Whidbey Rd. NE	41st Ave. NE	Bainbridge Lp. NE	87	88	88	88	89	Residential	390	30
Santis Lp. SE	Rossberg St. SE	Zermatt St. SE	87	89	87	88	89	Residential	910	30
Stevens Dr. NE	Campus Park Dr. NE	Campus Park Dr. NE	87	89	88	90	91	Residential	1400	30
Snowberry St. NE	Campus Meadows Lp. NE	Campus Meadows Lp. NE	87	87	89	90	91	Residential	300	30
Flute St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	88	88	89	Residential	950	30
Steamer Dr. SE	Baldwin St. SE	Compton Blvd. SE	87	87	87	88	89	Residential	920	30
Timberline Ct. SE	Timberline Dr. SE	End of Road	87	85	85	87	87	Residential	190	34
Mossy Rock Ave. NE	Spokane St. NE	Orcas St. NE	87	87	87	88	90	Residential	570	38
Orcas St. NE	Canton Ave. NE	Orcas Lp. NE	87	87	95	89	90	Residential	885	38
Stone St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	87	88	88	Residential	1610	30
Prism St. SE	Radius Lp. SE	Balustrade Blvd. SE	87	87	87	88	88	Residential	1660	30
Mt. Saint Helens St. SE	57th Ave. SE	56th Ave. SE	87	87	87	88	88	Residential	540	30
Ingleside Dr. SE	Zermatt St. SE	37th Ave. SE	87	87	87	90	90	Residential	950	30
Steamer Dr. SE	Compton Blvd. SE	Baldwin St. SE	87	87	87	88	89	Residential	830	30
Prism St. SE	Balustrade Blvd. SE	66th Ave. SE	87	88	89	89	89	Residential	660	30
Alder St. SE	14th Ave. SE	Lacey Blvd. SE	86	86	86	87	89	Residential	520	44
Crimson Ct. SE	Yelm Hwy. SE	End of Road	86	85	84	87	87	Residential	830	30
Alder St. SE	Sycamore Dr. SE	14th Ave. SE	86	86	88	89	91	Residential	1610	44
Orcas Ct. NE	Orcas Lp. NE	End of Road	86	86	87	90	91	Residential	350	37
Pennsylvania St. SE	Ruddell Rd. SE	Colorado St. SE	86	88	88	89	89	Residential	975	30

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Alanna Dr. SE	Lacey Elementary School	Carpenter Rd. SE	86	92	93	94	94	Residential	1380	37
Rosemont Ct. SE	Mullen Rd. SE	End of Road	86	87	87	86	86	Residential	300	30
Vashon Dr. NE	Sinclair Lp. NE north inters.	Columbia Wy. NE	86	87	89	89	90	Residential	900	30
27th Ct. SE	College St. SE	End of Road	86	86	84	85	86	Residential	530	43
Orcas Lp. NE	Canton Ave. NE	Orcas St. NE	86	89	89	90	91	Residential	580	37
Campus Park Dr. NE	Cameron Dr. NE	Campus Glen Dr. NE	86	87	87	87	89	Residential	975	38
Belair Dr. SE	Catalina Dr. SE	Impala Dr. SE	86	87	87	89	83	Residential	770	34
Arbor Dr. SE	39th Ct. SE	37th Ct. SE	86	84	82	83	84	Residential	720	30
Montclair Ct. SE	Montclair Dr. SE	North End of Road	86	88	87	88	91	Residential	230	30
26th Lp. SE	26th Ave. SE	26th Ave. SE	86	87	85	86	87	Residential	1150	33
26th Ct. SE	Carpenter Rd. SE	End of Road	86	86	86	87	87	Residential	450	30
Tyler Ct. SE	Komachin Lp. SE	End of Road	86	86	86	87	87	Residential	260	30
Belair Dr. SE	College St. SE	Catalina Dr. SE	86	87	87	89	82	Residential	430	30
Quail Dr. SE	45th Ave. SE	43rd Ave. SE	86	86	86	86	87	Residential	620	30
Jessica Ct. SE	Komachin Lp. SE	End of Road	86	86	85	87	87	Residential	240	30
Red Cedar Ct. SE	37th Ave. SE	End of Road	86	87	87	88	88	Residential	260	30
Midway Dr. NE	6th Ave. NE	Enterprise Dr. NE	86	89	92	93	95	Residential	1370	40
17th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	86	87	Residential	690	34
39th Ct. SE	Carpenter Rd. SE	End of Road	86	87	87	87	87	Residential	570	30
Switchback Lp. SE	Compass St. SE	Compass St. SE	86	87	87	87	87	Residential	1070	30
Edgewater Blvd. NE	Rushmore Ave. NE	Columbia Way NE	86	86	85	85	87	Residential	996	30
Silver Maple Ct. SE	37th Ave. SE	End of Road	86	87	87	87	88	Residential	450	30
Shirley St. SE	25th Lp. SE	25th Ave. SE	86	86	87	87	89	Residential	460	34
Meriwood Dr. NE	Vashon Dr. NE	Anderson Ct. NE	86	87	88	88	89	Residential	500	37
Wildspitz St. SE	Santis Lp. SE	Zermatt St. SE	86	90	90	91	93	Residential	430	30
10th Ave. SE	Golf Club Rd. SE	End of Road	86	87	87	87	87	Residential	265	30
Gemini St. SE	Ruddell Rd. SE	15th Ave. SE	86	88	90	91	92	Residential	1100	44
Parkside Dr. SE	49th Ave. SE	47th Ave. SE	86	86	88	88	89	Residential	655	30
Forest Ct. SE	37th Ave. SE	End of Road	86	87	87	88	88	Residential	200	30
Fairhill Dr. NE	31st Ave. NE	White Fir Dr. NE	86	87	88	88	89	Residential	550	30
Fairhill Dr. NE	White Fir Dr. NE	East End of Road	86	87	87	88	89	Residential	650	30
46th Ave. NE	Hilton Rd. NE	Meridian Rd. NE	86	86	87	87	88	Residential	2370	36
16th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	86	87	Residential	750	34
Jason Ct. SE	54th Ave. SE	End of Road	86	86	86	87	88	Residential	230	30
Chardonnay Dr. SE	Yelm Hwy. SE	Merlot Ln. SE	86	86	86	86	87	Residential	510	30
Madrid St. NE	Willamette Dr. NE	London Lp. NE	86	87	89	90	90	Residential	310	30
Campus Glen Dr. NE	Lupine St. NE	Campus Park Dr. NE	86	86	86	86	87	Residential	1530	38
24th Ave. SE	23rd Ave. SE	Ruddell Rd. SE	86	87	89	90	91	Residential	370	30

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
13th Ave. SE	Clearbrook Dr. SE	Glen Mary Dr. SE	86	86	90	91	93	Residential	840	34
Bowker St. SE	Pacific Ave. SE	7th Ave. SE	86	87	89	91	94	Residential	1810	34
Park Place Lp. SE	45th Ave. SE	44th Ct. SE	86	86	84	87	87	Residential	820	30
32nd Ave. SE	Carpenter Rd. SE	Long Lake Dr. SE	86	86	86	89	89	Residential	1000	30
Stevens Ct. NE	Stevens Dr. NE	End of Road	86	88	89	89	90	Residential	300	38
Sunview Ct. SE	Crimson Ct. SE	End of Road	86	85	84	85	87	Residential	190	30
50th Ave. SE	College St. SE	Boardwalk St. SE	86	86	86	87	87	Residential	860	30
18th Ave. SE	Homann Dr. SE	Alanna Dr. SE	86	86	84	85	87	Residential	630	34
Komachin Lp. SE	Tyler Ct. SE	Jeffery Ct. SE	85	85	85	86	87	Residential	930	29
26th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	86	87	89	Residential	1420	42
Koala St. SE	39th Ave. SE	Stikes Woods Dr. SE	85	86	84	85	83	Residential	1160	29
Kendra Ct. SE	James St. SE	End of Road	85	85	84	82	82	Residential	320	29
Komachin Lp. SE	Jeffery Ct. SE	Rustin Ct. SE	85	85	85	87	87	Residential	550	29
Beth Ct. NE	Deni Dr. NE	End of Road	85	86	86	89	91	Residential	420	29
Leisure Way SE	Chambers Lake Dr. SE	Gate	85	86	88	89	90	Residential	400	42
Orcas Lp. NE	Knuckle	Canton Ave. NE	85	86	87	90	91	Residential	730	35
Boardwalk St. SE	56th Ave. SE	53rd Ave. SE	85	86	86	86	86	Residential	660	36
33rd Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	85	85	85	87	89	Residential	1280	33
Boone St. SE	14th Ave. SE	End of Road	85	85	85	87	89	Residential	650	36
29th Ct. SE	Ruddell Rd. SE	End of Road	85	87	87	90	91	Residential	350	29
Maxine St. SE	25th Ave. SE	22nd Ave. SE	85	86	84	85	88	Residential	990	33
Mt. Rainier St. SE	57th Ave. SE	56th Ave. SE	85	87	85	86	86	Residential	540	29
Mt. Olympus St. SE	Yelm Hwy. SE	56th Ave. SE	85	83	87	88	88	Residential	680	29
Mt. Baker St. SE	57th Ave. SE	56th Ave. SE	85	86	87	88	88	Residential	410	29
Mt. Adams St. SE	57th Ave. SE	56th Ave. SE	85	85	87	88	88	Residential	550	29
Stockton St. SE	54th Ave. SE	End of Road	85	86	86	87	87	Residential	300	29
15th Ave. SE	Nobel Firs Ct. SE	End of Road	85	86	84	85	85	Residential	620	29
Inlay St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	85	85	86	86	Residential	1660	29
Baldwin St. SE	Compton Blvd. SE	Steamer Dr. SE	85	87	87	88	89	Residential	210	29
Craney Ct. SE	Sidney St. SE	West End of Road	85	86	86	84	85	Residential	240	29
Clearwater Lp. SE	Clearwater Dr. SE	Clearwater Lp. SE	85	86	84	85	87	Residential	1740	33
37th Ave. SE	Stikes Dr. SE	End of Road	85	77	78	81	81	Residential	1570	29
Ruddell Lp. SE	Ruddell Rd. SE	34th Ave. SE	85	85	85	89	91	Residential	810	34
71st Ave. SE	Compass St. SE	Bailey St. SE	85	85	86	88	88	Residential	1370	29
Compass St. SE	Balustrade Blvd. SE	66th Ave. SE	85	85	89	89	89	Residential	680	29
15th Ct. SE	15th Ave. SE	End of Road	85	86	86	87	87	Residential	180	29
Diamond Rd. SE	Diamond Lp. SE	Carpenter Rd. SE	85	87	87	88	89	Residential	700	35
56th Ave. SE	Boardwalk St. SE	Parkside Dr. SE	85	86	86	86	88	Residential	735	36

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
15th Ave. SE	Golf Club Rd. SE	College St. SE	85	85	85	85	85	Residential	1300	33
Zermatt St. SE	Ingleside Dr. SE	37th Ave. SE	85	85	83	84	86	Residential	840	29
Donegal Ct. SE	Hicks Lake Rd. SE	End of Road	85	87	87	87	87	Residential	530	29
Golf Club Rd. SE	Chambers Lake Dr. SE	22nd Ave. SE	85	87	87	88	89	Residential	1140	42
Ellsworth Ct. NE	Cameron Dr. NE	End of Road	85	85	89	89	90	Residential	280	36
41st Ave. SE	City Limits	Carpenter Rd. SE	85	87	87	88	89	Residential	1380	33
Flute St. SE	Balustrade Blvd. SE	66th Way SE	85	86	86	87	87	Residential	830	29
56th Lp. SE	56th Ave. SE	56th Ave. SE	85	86	86	87	87	Residential	800	36
Axis St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	84	87	88	88	Residential	1600	29
Catalina Dr. SE	Belair Dr. SE	End of Road	85	85	85	86	87	Residential	430	33
Sycamore St. SE	22nd Ave. SE	Gemini St. SE	85	85	87	88	87	Residential	1100	37
Parkside Dr. SE	47th Ave. SE	45th Ave. SE	85	85	86	88	89	Residential	900	29
Bainbridge Lp. NE	Jubilee Rd. NE	Jubilee Rd. NE	85	85	84	88	89	Residential	730	29
Bainbridge Ct. NE	Bainbridge Lp. NE	End of Road	85	86	86	86	87	Residential	650	29
Bailey St. SE	Balustrade Blvd. SE	66th Ave. SE	85	86	89	89	89	Residential	810	29
Craney Ct. SE	Sidney St. SE	East End of Road	85	86	86	86	87	Residential	410	29
Axis St. SE	Balustrade Blvd. SE	66th Ave. SE	85	86	87	89	90	Residential	660	29
Radius Lp. SE	Bailey St. SE	Balustrade Blvd. SE	85	85	88	88	88	Residential	1300	29
34th Ct. SE	Impala Dr. SE	West End of Road	85	86	82	83	85	Residential	130	33
Radius Lp. SE	71st Ave. SE	Bailey St. SE	85	85	85	86	85	Residential	1590	29
Clearwater Dr. SE	Timberline Dr. SE	Clearwater Lp. SE	85	83	83	84	87	Residential	640	33
Arcarro Ct. SE	Ruddell Rd. SE	End of Road	85	86	87	89	89	Residential	874	29
34th Ct. SE	Impala Dr. SE	East End of Road	85	86	84	85	85	Residential	180	33
Bailey St. SE	Radius Lp. SE	Balustrade Blvd. SE	85	85	88	88	89	Residential	1380	29
Alpha St. SE	Chambers Lake Dr. SE	21st Ave. SE	84	84	85	85	88	Residential	1250	40
Park Place Lp. SE	44th Ct. SE	Mullen Rd. SE	84	84	82	83	83	Residential	530	29
43rd Ct. SE	Park Place Lp. SE	End of Road	84	85	85	87	87	Residential	490	29
41st Ave. SE	Stikes Dr. SE	Quail Dr. SE	84	84	84	85	85	Residential	690	29
47th Ave. SE	Stikes Dr. SE	Parkside Dr. SE	84	84	84	85	85	Residential	780	29
Park Place Lp. SE	43rd Ave. SE	45th Ave. SE	84	84	84	85	85	Residential	790	29
61st Lp. SE	61st Ave. SE	Stockton St. SE	84	84	84	86	86	Residential	740	29
Stikes Woods Dr. SE	Koala St. SE	37th Ave. SE	84	85	85	85	87	Residential	310	29
Quail Dr. SE	43rd Ave. SE	End of Road	84	84	84	86	87	Residential	560	29
66th Ave. SE	Ruddell Rd. SE	Balustrade Blvd. SE	84	85	86	87	86	Residential	1200	35
60th Ave. SE	Stockton St. SE	Compton Blvd. SE	84	84	82	84	84	Residential	1090	29
61st Ave. SE	Thornbury Pl. SE	61st Lp. SE	84	85	84	86	86	Residential	1140	29
54th Ct. SE	Emerald St. SE	End of Road	84	74	74	75	76	Residential	310	29
Montclair Dr. SE	Montclair Ct. SE	End of Road	84	85	86	87	87	Residential	1120	28

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Virginia St. SE	66th Ave. SE	Yelm Hwy. SE	84	84	86	87	89	Residential	1300	35
Vashon Dr. NE	Camano Lp. NE	Sinclair Lp. NE north inters.	84	87	87	89	90	Residential	925	28
Wade Ct. SE	Komachin Lp. SE	End of Road	84	84	86	87	87	Residential	390	29
Jubilee Rd. NE	41st Ave. NE	Bainbridge Lp. NE	84	85	87	87	89	Residential	390	28
27th Ct. SE	Judd St. SE	End of Road	84	84	78	80	80	Residential	270	29
Lebanon St. SE	20th Ave. SE	14th Ave. SE	84	84	84	84	85	Residential	1670	35
Campus Glen Dr. NE	Willamette Dr. NE	Lupine St. NE	84	84	86	86	87	Residential	1580	34
Vermont Ave. SE	Ruddell Rd. SE	Pennsylvania St. SE	84	86	88	89	89	Residential	630	35
Carpenter Ct. SE	Diamond Lp. SE	End of Road	84	82	84	85	86	Residential	190	29
15th Ave. SE	Homann Dr. SE	Alanna Dr. SE	84	84	86	87	87	Residential	810	32
Hall St. SE	14th Ave. SE	Lacey Blvd. SE	84	84	85	88	86	Residential	1400	41
Jeffrey Ct. SE	Komachin Lp. SE	End of Road	84	86	86	87	87	Residential	380	29
Willow St. SE	14th Ave. SE	Lacey Blvd. SE	84	85	85	85	85	Residential	1080	41
Edgewater Blvd. NE	41st Ave. NE	Rushmore Ave. NE	84	86	83	84	87	Residential	1519	28
Gemini St. SE	15th Ave. SE	Alder St. SE	84	86	86	87	89	Residential	840	40
Campus Meadows Lp. NE	Campus Glen Dr. NE	Snowberry St. NE	84	85	85	87	87	Residential	685	34
Zenith Ct. NE	Willamette Dr. NE	End of Road	84	82	81	85	86	Residential	290	28
Crosswaters St. SE	Mullen Rd. SE	48th Ave. SE	84	84	84	84	85	Residential	140	29
Columbine Ct. SE	57th Ave. SE	End of Road	83	85	85	87	87	Residential	430	28
Compass St. SE	71st Ave. SE	Balustrade Blvd. SE	83	83	85	86	88	Residential	1160	34
Compton Lp. SE	Compton Blvd. SE	Compton Blvd. SE	83	83	84	84	84	Residential	980	28
Radius Lp. SE	Balustrade Blvd. SE	71st Ave. SE	83	83	85	86	86	Residential	1180	34
Ida Jane Way SE	35th Ave. SE	33rd Ave. SE	83	84	86	87	89	Residential	540	40
Jacobson Ct. SE	57th Ave. SE	End of Road	83	85	84	83	84	Residential	150	28
James St. SE	57th Ave. SE	Stockton St. SE	83	85	86	86	87	Residential	790	28
Timberline Dr. SE	Clearwater Dr. SE	Timberline Ct. SE	83	83	83	84	85	Residential	720	39
Angela St. SE	25th Lp. SE	25th Ave. SE	83	83	79	80	82	Residential	460	32
Vincent Ct. SE	57th Ave. SE	End of Road	83	83	83	85	86	Residential	320	28
Stikes Dr. SE	47th Ave. SE	End of Road	83	83	83	85	86	Residential	490	28
66th Way SE	Bailey St. SE	End of Road	83	84	84	85	85	Residential	650	34
58th Ct. SE	57th Ave. SE	End of Road	83	85	85	87	88	Residential	460	28
57th Way SE	Parkside Dr. SE	Mt. Baker St. SE	83	84	84	85	85	Residential	1030	28
57th Ct. SE	Rumac St. SE	End of Road	83	83	85	87	87	Residential	400	28
57th Ave. SE	Vincent Ct. SE	Rumac St. SE	83	83	85	87	88	Residential	530	28
57th Ave. SE	Thornbury Dr. SE	Stockton St. SE	83	83	83	81	83	Residential	1280	28
57th Ave. SE	Mt. Baker St. SE	Mt. Adams St. SE	83	85	85	85	87	Residential	1090	28
56th Ave. SE	Mt. Baker St. SE	Ruddell Rd. SE	83	85	85	85	87	Residential	1140	28
54th Ave. SE	Boardwalk St. SE	Summerwalk St. SE	83	84	84	86	86	Residential	470	33

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
44th Ct. SE	Greenbriar St. SE	West End of Road	83	83	83	83	83	Residential	670	28
Violet St. SE	14th Ave. SE	Lacey Blvd. SE	83	83	84	84	86	Residential	580	39
Strawberry Ct. SE	54th Ave. SE	End of Road	83	84	84	85	86	Residential	540	28
Beta St. SE	Chambers Lake Dr. SE	21st Ave. SE	83	84	86	87	89	Residential	1190	38
33rd Ct. SE	Ruddell Lp. SE	End of Road	83	83	84	86	86	Residential	1300	28
Komachin Lp. SE	54th Ave. SE	Tyler Ct. SE	83	83	83	84	85	Residential	830	28
Koala St. SE	Stikes Woods Dr. SE	Ruddell Rd. SE	83	84	86	87	88	Residential	540	28
33rd Ct. SE	Impala Dr. SE	West End of Road	83	84	84	85	85	Residential	130	39
Noble Firs Ct. SE	14th Ave. SE	End of Road	83	84	84	85	85	Residential	430	28
32nd Ct. SE	Impala Dr. SE	End of Road	83	84	86	87	88	Residential	130	39
Camano Ct. NE	Camano Lp. NE	End of Road	83	83	87	87	87	Residential	370	34
Camaro Ct. SE	31st Ave. SE	End of Road	83	85	84	85	86	Residential	260	39
Robbins St. SE	03rd Ave. SE	End of Road	82	83	85	85	85	Residential	350	32
37th Ave. SE	Apollo St. SE	End of Road	82	82	86	88	89	Residential	900	31
70th Way SE	Rainier Rd. SE	Radius Lp. SE	82	85	85	85	85	Residential	450	33
Rustin Ct. SE	Komachin Lp. SE	End of Road	82	82	86	87	87	Residential	160	27
61st Ave. SE	61st Lp. SE	Stockton St. SE	82	82	84	86	86	Residential	560	27
Danials Lp. SE	Compton Blvd. SE	Compton Blvd. SE	82	84	84	85	85	Residential	1120	27
08th Ave. NE	College St. NE	Livingston St. NE	82	82	82	83	84	Residential	1200	38
60th Ct. SE	Thornbury Dr. SE	End of Road	82	82	83	84	84	Residential	420	27
Long Lake Dr. SE	32nd Ave. SE	City Limits	82	80	80	81	81	Residential	650	27
13th Ave. SE	Willow St. SE	Golf Club Rd. SE	82	83	87	88	88	Residential	410	37
30th Ct. SE	Impala Dr. SE	End of Road	82	83	82	83	85	Residential	450	37
Campus Meadows Lp. NE	Snowberry St. NE	Lupine St. NE	82	85	87	89	89	Residential	1065	32
14th Ave. SE	Lebanon St. SE	Clearbrook Dr. SE	82	80	80	82	84	Residential	810	27
60th Lp. SE	Stockton St. SE	Stockton St. SE	82	81	82	82	84	Residential	1270	27
50th Ct. SE	50th Ave. SE	End of Road	82	82	82	83	83	Residential	540	27
57th Ave. SE	Emerald St. SE	Thornbury Dr. SE	82	82	81	83	83	Residential	470	27
29th Ave. NE	Marvin Rd. NE	End of Road	82	82	76	76	77	Residential	1110	27
14th Ave. SE	Nobel Firs Ct. SE	End of Road	82	82	82	85	85	Residential	1500	27
Stikes Dr. SE	41st Ave. SE	39th Ave. SE	82	83	83	81	81	Residential	750	27
Alhadeff St. SE	Pacific Ave. SE	End of public street (sign)	82	83	83	85	85	Residential	400	27
Park Center Ave. NE	College St. NE	End of Road	82	82	83	84	85	Residential	600	27
Stockton St. SE	60th Ave. SE	58th Ave. SE	82	82	84	84	86	Residential	870	27
Park Place Lp. SE	Mullen Rd. SE	43rd Ave. SE	82	80	80	83	85	Residential	890	27
57th Ct. SE	Stockton St. SE	End of Road	81	85	85	87	88	Residential	370	27
Muriel Ct. SE	27th Ct. SE	End of Road	81	82	82	83	83	Residential	620	27
Hogum Bay Rd. NE	Hawks Prairie Rd. NE	End of Road	81	83	84	84	84	Residential	1800	30

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Blue Finch Ct. SE	39th Ave. SE	End of Road	81	81	81	78	78	Residential	200	27
Tanager Ct. SE	39th Ave. SE	End of Road	81	81	81	76	78	Residential	130	27
Eagle Dr. NE	Bonanza Dr. NE	City Limits	81	85	81	83	83	Residential	630	27
31st Ct. SE	31st Ave. SE	End of Road	81	83	84	85	85	Residential	170	36
Sidney St. SE	39th Ave. SE	End of Road	81	82	82	80	81	Residential	1280	27
13th Ave. SE	Crowe St. SE	College St. SE	81	82	85	86	87	Residential	870	36
Sleater Kinney Rd. SE	Leisure Way SE	21st Ave. SE	81	81	81	81	83	Residential	1290	35
Thornbury Ct. SE	Thornbury Dr. SE	End of Road	81	83	83	84	84	Residential	520	27
39th Ave. SE	Arbor Dr. SE	End of Road	81	83	83	84	84	Residential	890	27
Lakeview Ct. SE	37th Ave. SE	End of Road	81	82	79	80	81	Residential	540	27
Komachin Lp. SE	Rustin Ct. SE	Stockton St. SE	81	81	83	84	85	Residential	570	27
Wallaby Ct. SE	39th Ave. SE	End of Road	81	81	81	77	77	Residential	140	27
Stockton St. SE	58th Ave. SE	54th Ave. SE	81	81	81	83	83	Residential	1280	27
Cory Ct. SE	61st Ave. SE	End of Road	81	82	84	86	87	Residential	190	27
Rumac St. SE	Pattison Lake Dr. SE	End of Road	81	81	82	82	84	Residential	1160	27
Impala Dr. SE	31st Ave. SE	28th Ave. SE	80	82	80	82	82	Residential	1100	34
22nd Ct. SE	22nd Ave. SE	End of Road	80	80	79	80	80	Residential	290	26
Livingston St. NE	8th Ave. NE	15th Ave. NE	80	80	80	81	83	Residential	960	35
14th Ave. SE	Carpenter Rd. SE	Nobel Firs Ct. SE	80	80	82	83	84	Residential	550	26
32nd Ave. NE	Bonanza Dr. NE	East End of Eagle Ct. Plat	80	81	87	89	89	Residential	965	26
38th Dr. SE	Carpenter Rd. SE	39th Ave. SE	80	80	80	81	81	Residential	870	26
39th Ave. SE	Mullen Rd. SE	Koala St. SE	80	79	80	81	79	Residential	520	26
Magnolia Ct. SE	38th Dr. SE	End of Road	80	80	82	83	83	Residential	250	26
28th Ave. SE	College St. SE	Impala Dr. SE	80	80	76	77	77	Residential	1190	26
38th Ct. SE	Arbor Dr. SE	East End of Road	80	80	80	81	81	Residential	210	26
Judd St. SE	28th Ave. SE	26th Ave. SE	80	80	79	81	75	Residential	1060	26
39th Ct. SE	Arbor Dr. SE	End of Road	80	80	82	83	83	Residential	120	26
Cherokee Lp. SE	60th Ave. SE	60th Ave. SE	80	81	81	82	82	Residential	1280	26
31st Ave. SE	College St. SE	Impala Dr. SE	80	81	85	85	83	Residential	990	34
Thornbury Dr. SE	57th Ave. SE	54th Ave. SE	80	80	82	83	84	Residential	750	26
39th Ave. SE	39th Ave. SE	Ruddell Rd. SE	80	80	80	81	76	Residential	1200	26
58th Ave. SE	57th Ave. SE	Stockton St. SE	80	82	82	84	85	Residential	1180	26
Beemer Ct. NE	Classic Dr. NE	End of Road	80	80	80	80	81	Residential	280	26
Candace Ct. SE	Komachin Lp. SE	End of Road	80	80	79	81	81	Residential	420	26
Stockton St. SE	Compton Blvd. SE	60th Ave. SE	80	80	81	83	85	Residential	790	26
Diamond Ct. SE	Diamond Lp. SE	End of Road	80	81	81	82	81	Residential	320	26
Vashon Dr. NE	41st Ave. NE	Camano Lp. NE	80	81	81	81	83	Residential	740	30
Ryan St. SE	39th Ave. SE	37th Ave. SE	80	84	85	74	77	Residential	770	26

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Arbor Dr. SE	37th Ct. SE	End of Road	80	78	78	79	80	Residential	890	26
Juliann Ct. SE	Komachin Lp. SE	End of Road	80	82	82	83	83	Residential	340	26
Beltway Lp. SE	60th Ave. SE	60th Ave. SE	80	84	84	86	88	Residential	1260	26
Impala Dr. SE	31st Ave. SE	End of Road	80	84	82	84	84	Residential	1030	34
Compton Blvd. SE	60th Ave. SE	Compton Lp. SE	80	76	77	77	79	Residential	720	26
Madrona Ct. SE	38th Dr. SE	End of Road	80	83	83	84	84	Residential	500	26
59th Lp. SE	Stockton St. SE	Stockton St. SE	80	81	80	80	82	Residential	1270	26
Commerce Place Dr. NE	Williamette Dr. NE	South End of Road	79	79	77	79	81	Residential	850	25
Foxglove Ct. SE	Rumac St. SE	End of Road	79	83	83	84	84	Residential	480	25
Judd St. SE	22nd Ave. SE	19th Ave. SE	79	77	77	79	81	Residential	860	25
Montclair Dr. SE	College St. SE	Montclair Ct. SE	79	76	78	78	80	Residential	460	25
Aldea Ct. SE	5th Way SE	End of Road	79	81	82	82	82	Residential	580	25
Commerce Place Dr. NE	Williamette Dr. NE	North End of Road	79	80	81	82	84	Residential	1680	25
40th Ct. SE	Ruddell Rd. SE	End of Road	79	79	79	79	82	Residential	500	25
East St. SE	12th Ave. SE	End of Road	79	84	87	87	89	Residential	460	28
Stikes Dr. SE	47th Ave. SE	45th Ave. SE	79	81	81	83	84	Residential	740	25
Judd St. SE	19th Ave. SE	Ruddell Rd. SE	79	79	79	81	81	Residential	1020	25
39th Ct. SE	39th Ave. SE	End of Road	79	79	81	77	77	Residential	130	25
River Ridge Dr. SE	Martin Way E.	End of Road (gate)	79	81	81	81	83	Residential	720	25
57th Ave. SE	Stockton St. SE	Vincent Ct. SE	79	81	81	84	85	Residential	810	25
39th Ave. SE	College St. SE	Stikes Dr. SE	79	77	77	71	72	Residential	770	25
55th Way SE	Topaz St. SE	Emerald St. SE	79	74	74	76	77	Residential	740	25
Thornbury Pl. SE	61st Ave. SE	End of Road	78	78	84	84	86	Residential	440	25
22nd Ave. SE	Agate Ct. SE	Diamond Lp. SE	78	80	81	81	80	Residential	770	25
33rd Ct. SE	Impala Dr. SE	East End of Road	78	78	86	87	89	Residential	180	32
Woodland Square Lp. SE	7th Ave. SE	6th Ave. SE	78	78	78	79	81	Residential	1750	25
Royce Ct. NE	Mercedes Dr. NE	End of Road	78	80	80	80	81	Residential	220	25
Jaguar Ct. NE	Alexander Dr. NE	End of Road	78	78	78	80	81	Residential	220	25
Corvette Ct. NE	Mercedes Dr. NE	End of Road	78	77	80	82	83	Residential	230	25
Crowe St. SE	Lacey Blvd. SE	End of Road	78	78	81	82	85	Residential	660	32
Diamond Lp. SE	Diamond Rd. SE	Diamond Rd. SE	78	81	81	81	83	Residential	1310	25
Alexander Dr. NE	Mercedes Dr. NE	Mercedes Dr. NE	78	79	81	83	85	Residential	1040	25
Afflerbaugh Dr. SE	Mullen Rd. SE	City Limits	78	80	79	81	82	Residential	1020	25
Judd St. SE	24th Ave. SE	22nd Ave. SE	78	82	87	87	89	Residential	570	25
55th Ct. SE	Emerald St. SE	End of Road	78	73	73	74	75	Residential	260	25
Edsel Ct. NE	Mercedes Dr. NE	End of Road	78	78	80	80	81	Residential	110	25
53rd Ave. SE	Lakehills St. SE	End of Road	78	78	80	81	83	Residential	190	25
Gem Ct. SE	58th Ave. SE	End of Road	78	79	79	80	81	Residential	140	25

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Stikes Dr. SE	39th Ave. SE	Mullen Rd. SE	77	77	77	69	70	Residential	1030	24
Campus Highlands Dr. NE	Willamette Dr. NE	Cameron Dr. NE	77	78	82	82	84	Residential	1750	26
58th Ave. SE	Opal Ct. SE	Thornbury Dr. SE	77	77	79	80	82	Residential	1060	24
32nd Ave. NE	Marvin Rd. NE	East End of Eagle Ct. Plat	77	77	81	82	82	Residential	1430	24
39th Ave. SE	Stikes Dr. SE	Stikes Dr. SE	77	77	77	73	74	Residential	940	24
Crystal Ct. SE	58th Ave. SE	End of Road	77	80	82	83	84	Residential	310	24
Diamond Rd. SE	Diamond Lp. SE	Diamond Lp. SE	77	78	80	81	79	Residential	730	24
54th Way SE	Topaz St. SE	Emerald St. SE	77	66	68	68	70	Residential	730	24
23rd Ave. SE	Golf Club Rd. SE	College St. SE	77	78	84	86	88	Residential	1270	30
Compton Blvd. SE	Stockton St. SE	60th Ave. SE	77	76	74	76	78	Residential	1210	24
54th Ave. SE	Thornbury Dr. SE	Stockton St. SE	77	79	79	80	80	Residential	1220	24
Compton Blvd. SE	Yelm Hwy. SE	Stockton St. SE	77	80	79	79	81	Residential	840	24
21st Ave. SE	West Lake Dr. SE	Sleater Kinney Rd. SE	77	78	89	84	86	Residential	830	27
Agate Ct. SE	22nd Ave. SE	End of Road	77	80	80	80	78	Residential	240	24
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	North End of Road	76	77	79	70	71	Residential	300	24
Woodland Square Lp. SE	College St. SE	7th Ave. SE	76	76	78	79	79	Residential	1820	23
Charlotte Ct. SE	36th Ave. SE	End of Road	76	78	78	79	79	Residential	160	23
Fir Ct. SE	43rd Ave. SE	End of Road	76	75	78	79	79	Residential	200	23
Hemlock Ct. SE	22nd Ave. SE	End of Road	76	73	73	74	74	Residential	200	23
Thornbury Dr. SE	Thornbury Pl. SE	57th Ave. SE	76	82	82	82	84	Residential	1450	23
12th Ave. SE	Sleater Kinney Rd. SE	End of Road	76	77	77	77	79	Residential	1200	23
Apollo St. SE	39th Ave. SE	37th Ave. SE	76	80	76	73	75	Residential	980	23
Ruddell Lp. SE	34th Ave. SE	Ruddell Rd. SE	76	76	87	91	93	Residential	660	22
38th Dr. SE	Stanfield Rd. SE	38th Lp. SE	76	78	77	78	78	Residential	620	23
Mary Lou St. SE	12th Ave. SE	Lisa Ln. SE	76	81	83	85	85	Residential	620	24
05th Way SE	Carpenter Rd. SE	Glen Ct. SE	75	75	77	80	81	Residential	1150	23
Carpenter Hills Lp. SE	Carpenter Rd. SE	Carpenter Rd. SE	75	71	71	73	75	Residential	2550	23
25th Ct. SE	25th Ave. SE	End of Road	75	75	77	78	78	Residential	440	23
Classic Dr. NE	Mercedes Dr. NE	Meridian Rd. NE	75	75	77	80	81	Residential	1300	23
Lakeview Dr. SE	30th Ave. SE	29th Ave. SE	75	77	81	82	82	Residential	630	23
Mercedes Dr. NE	Classic Dr. NE	Royce Ct. NE	75	76	78	78	79	Residential	1290	23
Mt. Tahoma Dr. SE	Mt. Tahoma Ct. SE	54th Ave. SE	75	74	77	74	75	Residential	420	23
05th Ct. SE	Kinwood Rd. SE	End of Road	75	78	78	79	80	Residential	540	23
Wellington Lp. SE	Stikes Dr. SE	Stikes Dr. SE	75	76	76	77	77	Residential	620	23
Emerald St. SE	58th Ave. SE	54th Ave. SE	75	75	75	75	73	Residential	1160	23
Lake Hills St. SE	54th Ave. SE	Emerald St. SE	75	80	80	81	83	Residential	780	23
Clearwater Ct. SE	Clearwater Dr. SE	End of Road	75	77	75	77	77	Residential	115	26
50th Ave. SE	Ruddell Rd. SE	End of Road	75	77	81	75	76	Residential	1220	23

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Gold Finch Ct. SE	38th Dr. SE	End of Road	75	76	75	76	77	Residential	190	23
43rd Ave. SE	Carpenter Rd. SE	Juniper Ct. SE	75	75	77	79	79	Residential	850	23
Jo Ann Ct. SE	36th Ave. SE	End of Road	74	74	74	75	76	Residential	160	22
Stikes Dr. SE	45th Ave. SE	41st Ave. SE	74	77	77	79	81	Residential	850	22
38th Lp. SE	38th Dr. SE	38th Dr. SE	74	76	75	76	77	Residential	1090	22
38th Dr. SE	38th Lp. SE	Carpenter Rd. SE	74	74	74	74	77	Residential	1000	22
38th Ct. SE	Arbor Dr. SE	West End of Road	74	78	78	79	79	Residential	180	22
16th Ave. SE	Golf Club Rd. SE	College St. SE	74	75	78	81	83	Residential	1270	24
Shadywood Ct. SE	Shady Lane Rd. SE	End of Road	74	77	79	80	78	Residential	300	22
Elm Ct. SE	Cedar Ct. SE	End of Road	74	75	79	81	82	Residential	210	22
37th Ave. SE	Ruddell Rd. SE	Apollo St. SE	74	75	75	77	77	Residential	870	29
Apollo St. SE	39th Ave. SE	End of Road	74	77	83	76	77	Residential	430	22
Enterprise Dr. NE	Hornet Dr. NE	15th Ave. NE	74	79	88	91	91	Residential	680	21
Diamond Lp. SE	22nd Ave. SE	Diamond Rd. SE	74	78	80	81	79	Residential	1250	22
Lakecrest St. SE	37th Ave. SE	35th Ct. SE	74	73	73	72	74	Residential	440	22
16th Ct. SE	16th Ave. SE	End of Road	74	74	75	77	78	Residential	210	22
Bentley Ct. NE	Mercedes Dr. NE	End of Road	74	74	79	79	81	Residential	130	22
Blue Jay Ct. SE	Gold Finch Dr. SE	End of Road	74	75	74	75	77	Residential	300	22
Wilshire Ct. SE	End of Road	End of Road	74	72	72	72	74	Residential	450	22
Glen Ct. SE	5th Way SE	End of Road	73	75	75	76	77	Residential	230	22
Lacey St. SE	Pacific Ave. SE	7th Ave. SE	73	74	77	80	81	Residential	1650	22
Carpenter Rd. SE	Mills Landing Ct. SE	Carpenter Rd. SE	73	74	76	76	77	Residential	675	22
14th Ave. NE	Galaxy Dr. NE	End of Road	73	74	75	77	78	Residential	240	24
Clearbrook Dr. SE	17th Ct. SE	Yonkers Dr. SE	73	73	74	77	80	Residential	890	18
Topaz St. SE	55th Way SE	54th Way SE	73	66	68	70	71	Residential	240	22
Century Ct. NE	15th Ave. NE	End of Road	73	74	66	66	67	Residential	1020	20
39th Ave. SE	Ruddell Rd. SE	Apollo St. SE	73	77	78	72	75	Residential	810	22
32nd Ct. SE	Ruddell Rd. SE	East End of Road	73	73	74	76	77	Residential	600	22
34th Ave. SE	Ida Jane Way SE	Stanfield Rd. SE	73	83	84	85	87	Residential	1080	26
Mercedes Dr. NE	Royce Ct. NE	Classic Dr. NE	73	74	77	80	81	Residential	840	22
37th Ct. SE	Arbor Dr. SE	End of Road	73	76	79	80	80	Residential	160	22
Sunset Dr. SE	Maple Hills Dr. SE	26th Ave. SE	72	79	82	84	87	Residential	740	21
Opal Ct. SE	58th Ave. SE	End of Road	72	75	76	77	78	Residential	220	21
Church St. SE	14th Ave. SE	Lacey Blvd. SE	72	77	79	81	83	Residential	330	21
Cora St. SE	Mary Lou St. SE	12th Ave. SE	72	77	80	83	85	Residential	610	20
Glen Alda Ct. SE	5th Way SE	End of Road	72	73	74	76	77	Residential	700	21
Cedar Hills Ct. SE	28th Ave. SE	End of Road	72	72	75	77	78	Residential	600	21
Cedar Ct. SE	43rd Ave. SE	End of Road	71	71	74	76	77	Residential	550	20

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
Green Ct. SE	5th Way SE	End of Road	71	73	75	77	79	Residential	140	20
05th Way SE	Glen Ct. SE	Kinwood Rd. SE	71	71	73	76	78	Residential	1260	20
Gold Finch Dr. SE	38th Dr. SE	38th Dr. SE	71	74	74	74	75	Residential	1690	20
Boone St. SE	12th Ave. SE	End of Road	70	77	80	83	85	Residential	380	19
33rd Ave. SE	Stanfield Rd. SE	Carpenter Rd. SE	70	73	71	72	72	Residential	1300	20
35th Ave. SE	"Lakeview Estates" HOA	35th Ct. SE	70	69	69	71	73	Residential	780	22
34th Ave. SE	Stikes Dr. SE	Ruddell Lp. SE	70	70	71	71	73	Residential	1500	20
Pattison Lake Dr. SE	Rumac St. SE	End of Road	69	70	71	72	73	Residential	1140	19
16th Ave. SE	Sulky Dr. SE	Clearbrook Dr. SE	69	70	71	73	74	Residential	480	19
Mt. Tahoma Ct. SE	Mt. Tahoma Dr. SE	South End of Road	69	71	72	66	68	Residential	420	19
Narada Ct. SE	54th Ave. SE	End of Road	68	70	72	64	66	Residential	410	19
Madera Ct. SE	Sierra Dr. SE	End of Road	68	70	70	70	71	Residential	330	19
Juniper Ct. SE	Arbor Dr. SE	End of Road	68	75	77	79	79	Residential	190	21
Maple Hills Dr. SE	Sunset Dr. SE	End of Road	68	69	70	71	73	Residential	950	19
Chambers Lake Dr. SE	Golf Club Rd. SE	End of Road	68	69	71	72	74	Residential	1370	20
Stephan Ct. SE	5th Way SE	End of Road	67	68	74	76	78	Residential	150	18
Arbor Dr. SE	41st Ave. SE	39th Ct. SE	67	74	73	75	76	Residential	670	20
Georgie Ct. SE	36th Ave. SE	End of Road	67	71	73	74	75	Residential	160	18
Shirley Ct. SE	36th Ave. SE	End of Road	67	72	76	77	78	Residential	150	18
19th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	67	68	67	70	72	Residential	1100	18
Sulky Dr. SE	20th Ave. SE	16th Ave. SE	66	67	69	71	72	Residential	930	17
21st Ct. SE	Golf Club Rd. SE	End of Road	65	67	69	72	73	Residential	520	16
29th Ave. SE	Lakeview Dr. SE	College St. SE	65	66	67	69	71	Residential	1220	18
17th Ct. SE	Clearbrook Dr. SE	End of Road	65	68	69	70	72	Residential	150	17
24th Ave. SE	Golf Club Rd. SE	College St. SE	65	66	73	75	77	Residential	1270	16
19th Ct. SE	19th Ave. SE	End of Road	64	66	66	67	67	Residential	370	16
Sierra Dr. SE	Sierra Ct. SE	Carpenter Rd. SE	64	65	66	67	69	Residential	1230	16
30th Ave. SE	Ruddell Rd. SE	End of Road	64	67	63	65	66	Residential	740	16
Sierra Dr. SE	Shady Lane Rd. SE	Sierra Ct. SE	64	65	65	66	69	Residential	1410	16
Hanover Dr. SE	20th Ave. SE	19th Ave. SE	63	65	64	65	65	Residential	1000	16
Mt. Tahoma Dr. SE	54th Ave. SE	End of Road	63	65	66	63	65	Residential	800	16
14th Ave. SE	Ruddell Rd. SE	15th Ave. SE	63	66	70	74	77	Residential	960	15
07th Ave. NE	End of Road	End of Road	62	63	63	64	66	Residential	570	15
36th Ct. SE	Lakecrest Dr. SE	East End of Road	62	62	60	60	61	Residential	210	16
32nd Ct. SE	Ruddell Rd. SE	West End of Road	62	64	63	65	65	Residential	450	15
33rd Lp. SE	33rd Ave. SE	33rd Ave. SE	62	65	65	66	67	Residential	1200	15
Northridge Pl. SE	39th Ave. SE	End of Road	62	63	72	74	75	Residential	400	15
20th Ave. SE	Sulky Dr. SE	Hanover Dr. SE	61	62	61	62	64	Residential	740	15

Street Name	Begin Location	End Location	2020	2019	2018	2017	2016	Func. Class	Length (ft)	RSL
29th Ct. SE	29th Ave. SE	End of Road	61	63	69	71	72	Residential	210	15
Webb St. SE	Pacific Ave. SE	End of Road	60	62	64	61	62	Residential	410	14
White Top Ave. NE	White Fir Dr. NE	East End of Road	60	63	64	65	67	Residential	180	15
20th Ave. SE	Sycamore Dr. SE	Sulky Dr. SE	59	65	69	70	72	Residential	1000	12
Kathy Ct. SE	36th Ave. SE	End of Road	59	65	66	67	67	Residential	150	14
White Top Ave. NE	White Fir Dr. NE	West End of Road	59	60	60	61	64	Residential	180	14
Hicks Lake Rd. SE	Donegal Ct. SE	25th Ave. SE	59	59	63	63	66	Residential	1070	14
30th Ave. SE	Lakeview Dr. SE	29th Ave. SE	59	59	63	64	64	Residential	980	14
Sierra Ct. SE	Sierra Dr. SE	End of Road	58	60	61	61	63	Residential	500	13
Arbor Ct. SE	43rd Ave. SE	End of Road	58	65	67	70	73	Residential	200	13
18th Ave. SE	Sulky Dr. SE	17th Ct. SE	58	61	62	62	65	Residential	720	13
Nelson Rd. SE	Kapalea Way SE	Ingleside Dr. SE	58	59	67	68	69	Residential	1030	13
Arbor Dr. SE	Juniper Ct. SE	41st Ave. SE	58	62	63	66	66	Residential	560	14
Hicks Lake Rd. SE	30th Ave. SE	Donegal Ct. SE	57	59	61	66	66	Residential	940	13
35th Ct. SE	35th Ave. SE	End of Road	57	59	62	64	66	Residential	270	13
Westminster Ct. NE	Westminster Dr. NE	End of Road	56	58	61	64	66	Residential	260	12
Homann Dr. SE	15th Ave. SE	Pacific Ave. SE	56	59	62	62	64	Residential	1410	12
37th Ct. SE	Ruddell Rd. SE	End of Road	56	58	59	62	65	Residential	270	12
Livingston Ct. NE	Livingston St. NE	End of Road	55	56	55	57	60	Residential	200	12
30th Ave. NE	Hogum Bay Rd. NE	End of Road	54	56	64	64	66	Residential	900	12
Homann Dr. SE	Lacey Elementary School	15th Ave. SE	54	57	57	57	57	Residential	1010	11
Hanover Dr. SE	19th Ave. SE	Clearbrook Dr. SE	54	55	56	58	61	Residential	820	11
38th Ct. SE	Ruddell Rd. SE	End of Road	54	56	64	66	67	Residential	290	11
45th Ave. SE	Carpenter Rd. SE	End of Road	52	54	60	63	66	Residential	220	10
White Fir Dr. NE	Fairhill Dr. NE	Meridian Rd. NE	47	50	50	52	55	Residential	1580	8
30th Ave. SE	Hicks Lake Rd. SE	End of Road	47	46	48	52	53	Residential	620	8
36th Ct. SE	Lakecrest Dr. SE	West End of Road	45	47	55	58	59	Residential	160	7
Westminster Dr. NE	7th Ave. NE	End of Road	44	45	51	53	55	Residential	1020	7
13th Ct. SE	College St. SE	End of Road	33	39	40	30	31	Residential	280	3
Selma St. SE	Pacific Ave. SE	End of Road	25	27	29	30	30	Residential	520	0

The *Pavement Surface Condition Field Rating Manual for Asphalt Pavement* is the guide used to determine pavement defects and the severity of those defects. Written by the Northwest Pavement Management Association (NWPMA) and the Washington State Department of Transportation (WSDOT), the rating manual defines fourteen different types of defects with three levels of severity.

In Lacey's pavement management system, information is collected for the following defects:

- Rutting & Wear
- Alligator Cracking
- Longitudinal & Transverse Cracking
- Raveling & Weathering
- Patching
- Depressions & Distortions

Rutting & Wear


Rutting is a surface depression within the wheel path may be caused by heavy trucks, slow or stopping traffic, poor construction or moisture damage. When the upper pavement layers are rutted, the pavement along the edges of the rutted area may lift up.

Wear is surface depression in the wheel path resulting from tire abrasion.

Rating Severity:

In both cases, the overall severity is measured by the average observed depth of the rut, or wear depression.

Low	1/4 inch to 1/2 inch
Medium	1/2 inch to 3/4 inch
High	over 3/4 inch

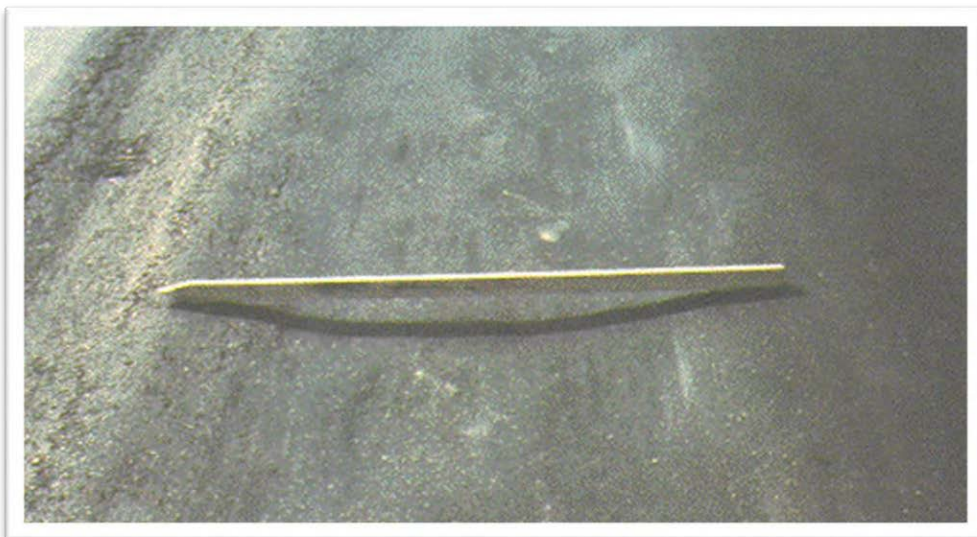

Alligator Cracking


Alligator Cracking is associated with loads and is usually limited to areas of repeated traffic loading. Generally, cracking of this type begins as a single longitudinal, discontinuous crack within the wheel path that progresses with time and loads to a more branched pattern that begin to interconnect. Eventually the cracks interconnect sufficiently to form many pieces, resembling the pattern of alligator hide.

Potholes and other occurrences of missing or destroyed pavement eventually accumulate as crack severity worsens.

Rating Severity:

Low	Branched, discontinuous thin cracks are beginning to interconnect and form the typical alligator pattern.
Medium	Cracking is interconnected and forms an alligator pattern. The cracks are wider with some spalling* along the edges, but the pavement pieces are still in place.
High	The alligator pattern is fully developed. Individual pieces of pavement may be loosened or even missing. Pumping* up through the cracks may be seen.

* See Glossary (pages 97-98)

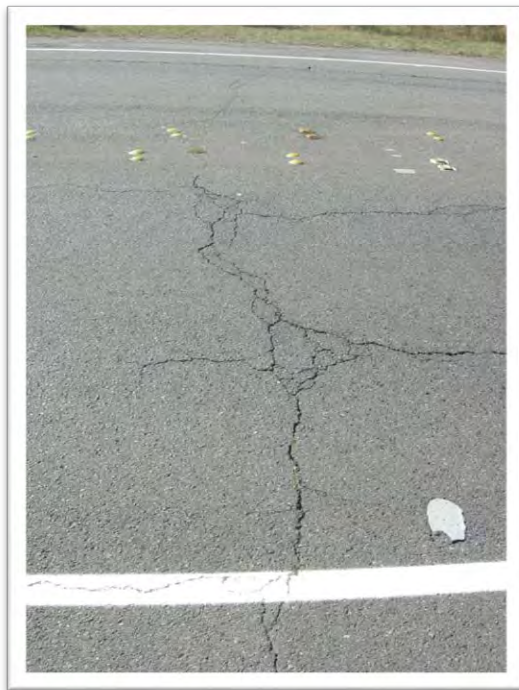



Longitudinal & Transverse Cracking

Longitudinal Cracks run roughly parallel to the roadway center line. Longitudinal cracks associated with the beginning of alligator cracking are generally discontinuous and broken. They may be associated with loads, poorly constructed paving joints, or joints and cracks under the surface course.

Transverse Cracks run roughly perpendicular to the roadway center line. They may be due to surface shrinkage caused by low temperatures, hardening of the asphalt, or cracks in underlying pavement layers.

Rating Severity:

- | | |
|--------|--|
| Low | The cracks have very little or no spalling along the edges and are less than 1/4 inch wide (“hairline” cracks). |
| Medium | Cracking is 1/4 inch wide or greater. There may be a few thin connecting or intersecting cracks near the main crack. |
| High | Cracks are spalled and wide. Pieces are visibly missing along the crack. |

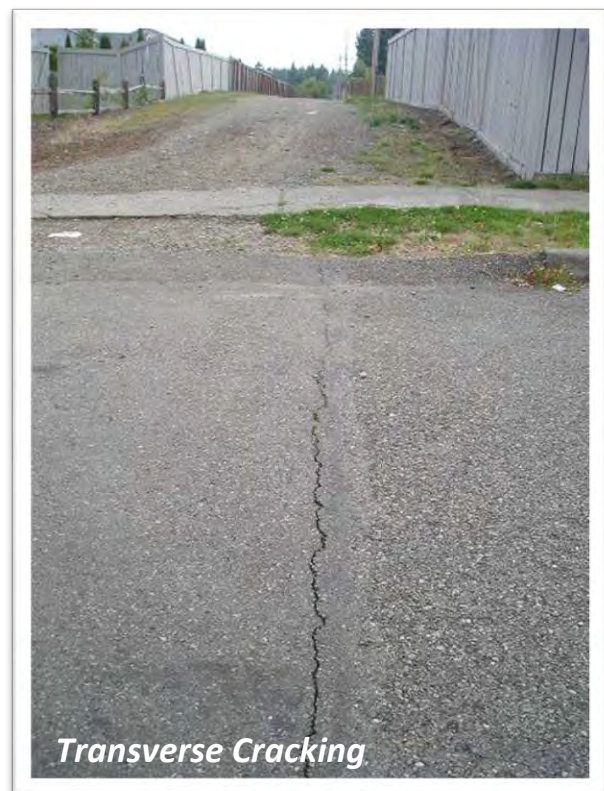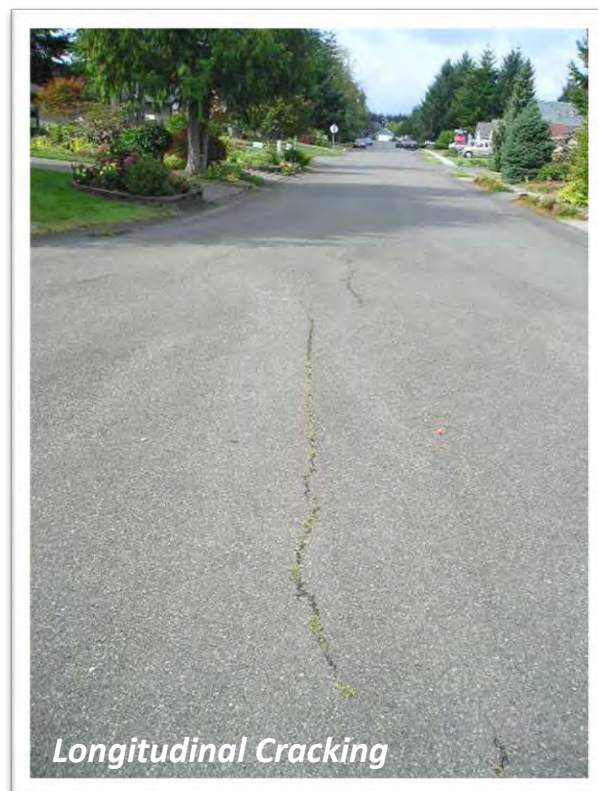

Weathering

Weathering is the wearing away of the asphalt binder and fine aggregate. Pavement surface deterioration occurs due to oxidation, inadequate compaction, insufficient asphalt content, excessive natural sand, surface water erosion, and traffic. The pavement loses its smooth surface and begins to appear open and rough like very coarse sandpaper.

Rating Severity:

- | | |
|--------|---|
| Low | The asphalt surface is beginning to show signs of aging. The binder or fine aggregate is starting to wear away and may be accompanied by fading of the asphalt color. |
| Medium | The loss of fine aggregate is noticeable and the edges of the coarse aggregate are exposed up to 1/4 width (of the longest side). The surface texture is moderately rough and pitted. |
| High | There is considerable loss of fine aggregate and the edges of the coarse aggregate are exposed greater than 1/4 width (of the longest side). The surface texture is very rough and deeply pitted. |



Raveling

Raveling is the dislodging of coarse aggregate and it is caused by insufficient asphalt binder, poor mixture quality, inadequate compaction, segregation, or stripping. The pavement surface is rough and appears dimpled and pitted.

Rating Severity:

- | | |
|--------|--|
| Medium | The loss of coarse aggregate is considerable (greater than 20 pieces or clusters per square yard). |
| High | The surface texture is very rough and pitted and may be completely removed in places. |




Patching

A patch is an area of pavement which has been replaced with new material to repair the existing pavement or access utilities. Though they are a necessary part of repair work, patched areas generally don't perform as well as the original pavement section.

In general, patches are smaller than typical rehabilitation in size and scope. They are less than full roadway width and/or are less than project length. For each treatment it must be determined whether it would be more effective (and cost-effective) to apply patches throughout as needed, or to simply reconstruct the road.

Rating Severity:

- | | |
|--------|--|
| Low | Patch has at most low severity distress of any type. |
| Medium | Patch has medium severity distress of any type. |
| High | Patch has high severity distress of any type. |

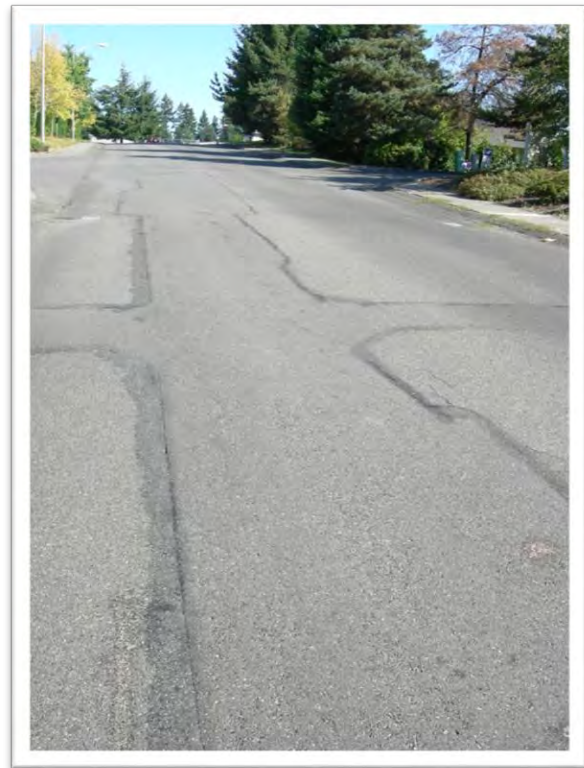

Depressions & Distortions

These defects are localized low spots or elevated areas of the pavement that result from settlement, pavement shoving, displacement due to subgrade swelling, or displacement due to tree roots. These forms of surface distress occur in isolated areas of the road.

Rating Severity:

The severity is defined by as the maximum vertical deviation from a 10-foot straightedge placed on the pavement:

Low 1/8 inch to 2 inches per 10 feet.

Medium 2 inches to 4 inches per 10 feet.

High Over 4 inches per 10 feet.



GLOSSARY OF COMMON TERMS

Arterial	High-volume roadway intended for efficient movement of people and goods.
Collector	Roadway that connects commercial, industrial and residential streets to arterials or other collectors.
Distresses/ Defects	Visual pavement surface distress or pavement defects can be quantified and related to the life cycle of a given type of pavement or roadway under given traffic and weather conditions. Each distress is generally associated with a specific pavement property, such as aging, wearing, fatigue, or materials. These pavement surface defects can be distinguished and quantified visually by human or automated techniques.
Extent	Extent is the measure of area, length, or count associated with a given distress. It is how much and how far a given defect has progressed.
HMA	<u>Hot Mix Asphalt</u> . The most common type of flexible pavement surfacing in the U.S.
PCI	<u>Pavement Condition Index</u> . A value from 0 to 100 assigned to a given road section, calculated by deducting points for the extent and severity of noted defects. Serves as a comparative indicator of pavement condition.
PMS	<u>Pavement Management System</u> . "A systematic method for routinely collecting, storing, and retrieving the kind of decision-making information needed [about pavements] to make maximum use of limited maintenance [and construction] dollars." - The American Public Works Association (APWA)
Pavement Preservation	"The timely application of carefully selected surface treatments to maintain or extend a pavement's effective service life."
Project	A project is the unit used to evaluate or group pavement elements. Projects are generally thought of as portions of roadway that could reasonably become funded improvement projects; however, they can be grouped together for various reasons. They generally consist of similar geometric data, such as pavement width, structure, and pavement type, or can be related to other needs, such as traffic volumes or planning needs.

Pumping	The forcing of base materials up through the cracks in the pavement by water.
Raveling	The loss of material from the pavement. This may involve only small amounts of fine aggregate and/or binder; or it may involve large pieces of the pavement at the edge of cracks or joints.
RSL	The <u>Remaining Service Life</u> of a pavement is the estimated number of years to the time when the pavement is providing substandard service quality. This value is calculated using the distress data and the pavement's rate of deterioration.
Severity	The definition of severity for a given defect varies with each distress and is generally a measure of how badly or to what extent a given defect has deteriorated. Examples are crack widths, crack deterioration, or spalling, and loss of materials.
Spalling	The deterioration of the sharp edge formed at the pavement surface along each side of a crack or joint. With severe spalling, pieces of the pavement break away, causing the visual size or width of the crack on the pavement surface to be irregular and wider than the crack width below the surface. Large spalls may extend to full depth.
Segment	A segment is generally a single block, 1/10th mile, or other relatively short, homogeneous unit of roadway. Several segments may be included in a single project. Smaller segment definitions provide greater flexibility in the growth and expansion of the pavement management system. These are generally the fundamental elements of the roadway network and thus the PMS database structure. All ratings are performed within each segment. All data within the PMS are linked or referenced to a given segment, and they are located in the segment or roadway by the distance or mile post along a given street or road.
Wheel Path	There are two wheel paths per traffic lane. If the lane is equally divided longitudinally down the middle, each half may be broadly considered one wheel path. Therefore, a two-lane roadway has four wheel paths.

